

SCREWDRIVERS

18V Cordless Drywall/Deck Screwdriver Kit

12V MAX* 1/4" Screwdriver Kit

1/4" (6.35mm) 7.2V Cordless Two-Position Screwdriver Kit

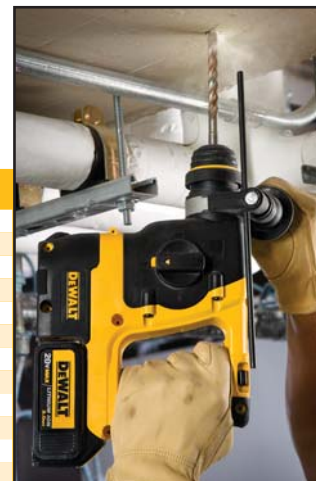
SPECIFICATIONS	DC520KA	DCF610S2	DW920K-2
Volts	18V	12V MAX*	7.2V
Drive Size	1/4"	1/4"	1/4" Hex
No Load Speed	0-900 / 0-2,900 rpm	0-1,050 rpm	0-500 rpm
Chuck	—	1-Handed Loading, 1/4" Hex Chuck	—
Max Torque (in-lbs)	180 in-lbs	—	80 in-lbs
Max Power	—	160 UW0	—
Capacity (CRS)	12 gauge	—	—
LEDs	—	3	—
Length	—	6-1/4"	—
Weight	5.1 lbs	2.2 lbs	3.5 lbs
Charger/Batteries	1 Hour Charger / (2) 18V XRP™	Fast Charger / (2) 12V MAX*	1 Hour Charger / (2) 7.2V
Includes	Bit tip / magnetic holder, drywall nosepiece, & TEKS® nosepiece	(1) bit tip & (1) belt hook	—


18V 7/8" (22mm) Cordless SDS Hammer (Tool Only)

18V 7/8" (22mm) Cordless SDS Hammer Kit

18V 7/8" (22mm) Li-Ion Cordless SDS Rotary Hammer Kit
SDS ROTARY HAMMERS

SPECIFICATIONS	DC212B	DC212KA	DC212KL
Volts	18V	18V	18V
Chuck Type	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0-1,100 rpm	0-1,100 rpm	0-1,100 rpm
Blows/Min	0-4,100 bpm	0-4,100 bpm	0-4,100 bpm
Impact Energy	1.7 ft-lbs	1.7 ft-lbs	1.7 ft-lbs
Vibration Measurement	8.0 m/s ²	8.0 m/s ²	8.0 m/s ²
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	No	No	No
Concrete Optimum	5/32 - 1/2"	5/32 - 1/2"	5/32 - 1/2"
Weight	5.25 lbs	7.6 lbs	6.7 lbs
Charger/Batteries	Sold Separately	1 Hour Charger / (2) 18V XRP™	1 Hour Charger / (2) 18V XRP™ Li-Ion
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod


20V MAX* Lithium Ion 3 Mode SDS Rotary Hammer Kit (3.0 Ah)

24V 7/8" (22mm) Cordless SDS Hammer Kit

36V 1" (25mm) Cordless Li-Ion SDS Rotary Hammer Kit

36V SDS Rotary Hammer Kit and Dust Extraction System

SPECIFICATIONS	DCH213L2	DC223KA	DC233KL	DC233KLDH
Volts	20V MAX*	24V	36V	36V
Chuck Type	SDS Plus	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0-1,100 rpm	0-1,100 rpm	1,150 rpm	1,150 rpm
Blows/Min	0-4,100 bpm	0-4,100 bpm	0-4,400 bpm	0-4,400 bpm
Impact Energy	1.7 ft-lbs	1.7 ft-lbs	1.9 ft-lbs	1.9 ft-lbs
Vibration Measurement	8.0 m/s ²	9.0 m/s ²	8.5 m/s ²	8.5 m/s ²
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™	Yes
Chipping	Yes	Yes	Yes	Yes
Concrete Optimum	5/32 - 1/2"	5/32 - 1/2"	5/32" - 5/8"	5/32" - 5/8"
Weight	6.4 lbs	8.4 lbs	7.8 lbs	7.8 lbs
Charger/Batteries	Fast charger / (2) 20V MAX* (3.0 Ah)	1 Hour Charger / (2) 24V	1 Hour Charger / (2) 36V	1 Hour Charger / (2) 36V
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	D25302DH dust extraction system, and 360° side handle with depth rod