

## **PRODUCT DATA SHEET**

Oilfield Dry Moly Lube, 11 Wt Oz

Part Number: 03284

Product Description Fast drying film resists dirt and dust build-up. Good

adhesion and long lasting formula. Lowers friction, prevents galling and helps to reduce torque and energy consumption. High anti-friction and anti-seize properties.

Pressure Rating is 250,000 psi

Applications Gaskets, transfer belts, conveyor belts, motors, plant

machinery and handling equipment, rubber moldings, high temperature, low load, or high rpm slides, rollers, wheels,

gears, chains & hoists

Unit Package Description 16 Ounce Aerosol

Brand CRC

Generic Description 1 Dry Film Lubricant

Net Fill 11 Wt Oz

UPC Code 078254032849

Unit Dimensions 7.75H x 2.63W x 2.63D in

Units Per Case 12

Case Dimensions 8.6H x 8.4W x 11.3D in

Cases Per Pallet 133
Case Weight 12 lbs

1 2 of 5 Code 30078254032840

Appearance Gray Liquid

Base Type Molybdenum Disulfide

Flash point (F) <0°F

Flash point (C) <-18°C

Flammability Class - CPSC Extremely Flammable

Spec Gravity Concentrate 0.773

Plastic Safe No
Film Type Dry
Evaporation Rate Fast

Working Temp (F) 650°F (Continuous) / 750°F (Intermittent)

Last revised: 2/7/2017

Page 1 of 2



de Larga Duración



## **PRODUCT DATA SHEET**



343.3°C (Continuous) 398.9°C (Intermittent)

Propellant

Hydrocarbon

Aerosol Flammability Level

Ш

**DOT Proper Shipping Name** 

Aerosols, Flammable, Limited Quantity

VOC % (Federal)

00.3

VOC g/L (Federal)

510.5

VOC Lbs./Gal. (Federal)


4.3

**VOC Category** 

Dry Film Lubricant

Removal (How To)

Remove with a heavy duty degreaser.

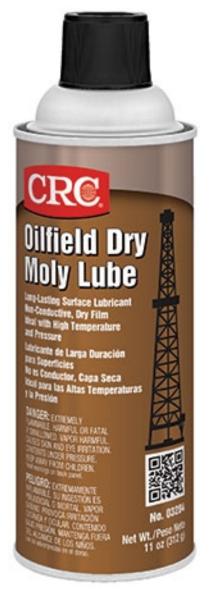

Last revised: 2/7/2017

Page 2 of 2



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified

and adheres to the strictest guidelines for quality in all facets of research, development and production.