

Digital Protractor

Series 950

- For measurement of flatness, squareness and angularity.
- Precision support surfaces in aluminium frame providing, high rigidity and low weight.


Specifications

Measuring range	360° (4 x 90°)
Dimensions	153 x 49 x 31 mm
Mass	300 g
Power supply	Standard battery (9 V) GLRG1
Battery life	approx. 500 hours

Optional accessories


No.	Description
50AAA983A	RS-232C 25 pin signal cable with foot switch
64PPP794	Magnetic V-block for securing to magnetic workpieces

- Note: 965014, 50AAA983A and 936937 are for 950-318 only

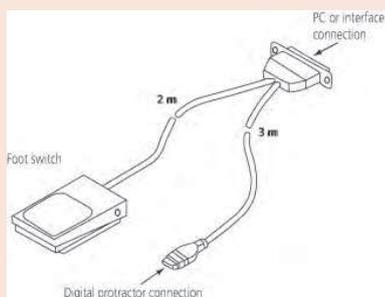

950-317

No.	Data Output	Model	Sensitivity (degrees)	Max. permissible error (degrees)	Repeatability (degrees)
950-317	No	Pro 360 Without data output	0.1	Horizontal : 0.1 Vertical : 0.2	0.1
950-318	Yes	Pro 3600 With data output	0.01 (0 to 9.99) 0.1 (10 to 90)	0.05 (0 to 10) 0.1 (80 to 90) 0.2 (10 to 80)	0.05

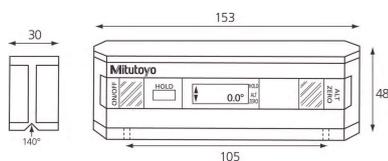

Distance between two M 3 x 0,5 mm Mounting holes