

FEEL THE SW DIFFERENCE...

FOCUSED ON FEATURES FOR TODAY'S WORKERS.





PF-088-095-DRK/ECO-GY

DRITEK ABSORBENT-LINED ECOTEK BIODEGRADABLE NITRILE EXAM GLOVES

WORK WITH CONFIDENCE AND COMFORT IN ENVIRONMENTALLY CONSCIOUS BIODEGRADABLE GLOVES WITH OUR EXCLUSIVE DRITEK SWEAT MANAGEMENT TECHNOLOGY.

- DriTek[®] Comfort Technology with absorbent lining that wicks away moisture for added extended use
- EcoTek[®] Biodegradability Technology accelerates landfill breakdown without any performance loss
- · Fully textured for secure grip
- · Silicone-free for critical environments
- 1.5 AQL exceeds laboratory standards
- ANSI 3 Abrasion resistance
- ANSI 1 Puncture resistance
- SHA Dermatalogically Approved



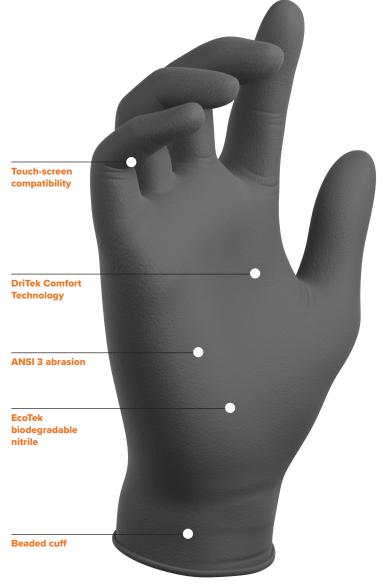



SW Safety Solutions Inc. 33278 Central Avenue, Unit 102, Union City, CA 94587, USA Tel: +1.510.429.8692 | Fax: +1.510.487.5347 Trademarks and registered trademarks are the property of SW Safety Solutions Inc. and its affiliates ©2019 SW Safety Solutions Inc. All rights reserved.



TECHNICAL DATA



PF-088-095-DRK/ECO-GY

DRITEK ABSORBENT-LINED ECOTEK BIODEGRADABLE NITRILE EXAM GLOVES

PRODUCT DESCRIPTION

| SPECIFICATIONS | | | |
|----------------|--------|----------------|-----------|
| PRODUCT | | PowerForr | n® |
| GRADE | | Powder-Fr | |
| MATERIAL | | Nitrile | |
| THICKNESS | FINGER | 8.2mil | 0.21mm |
| I HICKINESS | FINGER | 0.21111 | 0.2111111 |
| | PALM | 6.2mil | 0.16mm |
| | CUFF | 5.9mil | 0.15mm |
| COLOR | | Gray | |
| SURFACE | OUTER | Fully Textured | |
| | INNER | DriTek® | |
| LENGTH | | 9.5" | 242mm |
| WEIGHT | | 8.8g | |
| FIT TYPE | | Ambidextrous | |
| CUFF TYPE | | Beaded | |
| WATERTIGHT AQL | | 1.5 | |
| ORIGIN COUNTRY | | China | |

PHYSICAL PROPERTIES PRE-AGING PRE-AGING POST-AGING TENSILE 15 MPa STRENGTH: 15 MPa ELONGATION: 550%

INTEGRATED TECHNOLOGIES

DRITEK Comfort Technology: Advanced flock lining is a soft cotton-like nitrile glove lining that wicks away moisture for added comfort in extended use.

ECOTEK[®] Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.

100% Air Inspected



* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN 420:2003 EN 455:2000-2015 EU 2016/425 ANSI/ISEA 105-2016 ASTM D6319-10 ASTM F739-12 CAT III COMPLEX DESIGN FDA 21 CFR 177.2600

sign **(€ 0493**



Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

| ITEM NO. | SIZE | PALM WIDTH | PACKAGING |
|----------|--------------|------------|-------------------------------------|
| N260502 | S 6½ – 7 | 3.3" 85mm | 50 gloves per box 10 boxes per case |
| N260503 | M 7½ – 8 | 3.7" 95mm | 50 gloves per box 10 boxes per case |
| N260504 | L 8½ – 9 | 4.2" 107mm | 50 gloves per box 10 boxes per case |
| N260505 | XL 9½ – 10 | 4.5" 114mm | 50 gloves per box 10 boxes per case |
| N260506 | 2XL 10½ – 11 | 4.9" 124mm | 50 gloves per box 10 boxes per case |

Repair/Maintenance General Purpose

APPLICATIONS

Engine & Equipment

Assembly

Inspection/ Quality Assurance

Painting & Tool Cleaning

Wet, Oily Parts Handling

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R_N26050X1119



SW Safety Solutions Inc. 33278 Central Avenue, Unit 102, Union City, CA 94587, USA Tel: +1.510.429.8692 | Fax: +1.510.487.5347 Trademarks and registered trademarks are the property of SW Safety Solutions Inc. and its affiliates ©2019 SW Safety Solutions Inc. All rights reserved.

