



IMPACT SOCKETS AND BITS

6

SETS

1/4" - 2-1/2" DRIVE

FRACTIONAL/METRIC

6, 12, 8 POINT

MAGNETIC

BIT HOLDERS

NUTSETTERS

EXTENSIONS



IMPACT SOCKETS AND BITS

6

Proto manufactures a wide range of impact sockets from 1/4" square drive up to 2-1/2" square drive. Size openings range from 3/16" up to our largest 8" opening to meet every industrial need. Metric sizes are also available from 4mm to 65mm. Proto also offers several different styles from 6 point to 4, 8, or 12 point, standard length or deep, to surface drive and magnetic.

Proto impact sockets are manufactured to the most up to date industrial specifications assuring:

- Concentric openings.
- Large clearance holes.
- Tight nut end tolerance.

IMPACT SOCKETS

- Impact sockets are manufactured from special alloy steel for strength and durability.
- Impact sockets are heat treated for the correct balance of strength and hardness.
- Socket wall thickness is optimized to provide the required strength while retaining ample access to restricted fasteners.
- Thin wall sockets are available for special tight clearance applications.
- The depth of the socket opening is designed to fully engage all standard fasteners for more secure operation.
- All impact sockets feature two through holes. A groove to accept a retaining ring and pin to secure the socket to the power tool anvil.
- All Proto impact sockets feature chamfered service ends and for quick and positive fastener engagement.
- Patented impact universal joints and sockets provide more power and last longer.
- One piece construction ensures concentricity.
- Special heat treat ensures long life.
- Precision machined tips for proper fastener engagement.

Proto impact sockets incorporate the TORQUEPLUS™ wrenching system. This high performance design allows the socket to contact the fastener away from the corner while also dispensing stress over larger areas.

- Allows up to 15% more torque to be applied to the fastener.
- Reduces the risk of fastener rounding.
- Provides a greater opportunity to turn worn, rounded fasteners.

BITS

- Proto bits and accessories are offered in a broad range to accommodate all production assembly applications.
- Proto offers a wide range of insert bits, power bits, bit holders, extensions, and nut setters.
- These are manufactured in a variety of sizes and styles to provide access as well as the designs necessary to drive different screw recesses.
- A wide variety of bits are available including Philips®, slotted Torx®, socket head, square recess, clutch, and Pozidriv® in lengths ranging from 1" to 6".
- Bit holders, nut setters, and extensions are also available to meet production line needs.

*Torx® is a registered trademark of Textron.

SAFETY

- Use safety goggles. Serious eye injury is possible.
- Do not hold socket, universal joint or any other attachment while power tool is running.
- Do not use damaged socket. Replace.
- Do not continue to hammer with an impact tool when the fastener is tight.
- Do not use hand sockets with power tools.
- Do not use power sockets with impact tools.







SET NO. 69106 1/4" DRIVE 11 PC. SOCKET SET— 6 POINT

• Weight: .67 lbs.



Product ID No.	Contents	Description	Contents	Description
69106	6906H	3/16" Socket	6914H	7/16" Socket
	6907H	7/32" Socket	6916H	1/2" Socket
	6908H	1/4" Socket	6918H	9/16" Socket
	6909H	9/32" Socket	6920H	5/8" Socket
	6910H	5/16" Socket	2585	Socket Bar 9"
	6911H	11/32" Socket	2590	Socket Clip (11)
	6912H	3/8" Socket		



SET NO. 69206 1/4" DRIVE 13 PC. **METRIC** SOCKET SET— 6 POINT

• Weight: 84 lbs.



Product ID No.	Contents	Description	Contents	Description
69206	6904M	4 mm Socket	6911M	11 mm Socket
	6905M	5 mm Socket	6912M	12 mm Socket
	69055M	5.5 mm Socket	6913M	13 mm Socket
	6906M	6 mm Socket	6914M	14 mm Socket
	6907M	7 mm Socket	6915M	15 mm Socket
	6908M	8 mm Socket	2588	Socket Bar 11"
	6909M	9 mm Socket	2590	Socket Clip (13)
	6910M	10 mm Socket		



SET NO. 69116 1/4" DRIVE 11 PC. DEEP SOCKET SET— 6 POINT

• Weight: 1.31 lbs.



Product ID No.	Contents	Description	Contents	Description
69116	6506H	3/16" Deep Socket	6514H	7/16" Deep Socket
	6507H	7/32" Deep Socket	6516H	1/2" Deep Socket
	6508H	1/4" Deep Socket	6518H	9/16" Deep Socket
	6509H	9/32" Deep Socket	6520H	5/8" Deep Socket
	6510H	5/16" Deep Socket	2585	Socket Bar 9"
	6511H	11/32" Deep Socket	2590	Socket Clip (11)
	6512H	3/8" Deep Socket		



SET NO. 69212 1/4" DRIVE 11 PC. **METRIC** DEEP SOCKET SET— 6 POINT

• Weight: 1.37 lbs.



Product ID No.	Contents	Description	Contents	Description
69212	6505MH	5mm Deep Socket	6512MH	12 mm Deep Socket
	6506MH	6mm Deep Socket	6513MH	13 mm Deep Socket
	6507MH	7mm Deep Socket	6514MH	14 mm Deep Socket
	6508MH	8mm Deep Socket	6515MH	15 mm Deep Socket
	6509MH	9mm Deep Socket	2585	Socket Bar 9"
	6510MH	10 mm Deep Socket	2590	Socket Clip (11)
	6511MH	11mm Deep Socket		



SET NO. 72106 3/8" DRIVE 15 PC. SOCKET SET— 6 POINT

• Weight: 1.39 lbs.



Product ID No.	Contents	Description	Contents	Description
72106	7208H	1/4" Socket	7222H	11/16" Socket
	7209H	9/32" Socket	7224H	3/4" Socket
	7210H	5/16" Socket	7226H	13/16" Socket
	7211H	11/32" Socket	7228H	7/8" Socket
	7212H	3/8" Socket	7230H	15/16" Socket
	7214H	7/16" Socket	7232H	1" Socket
	7216H	1/2" Socket	2587	Socket Bar 17"
	7218H	9/16" Socket	2591	Socket Clip (15)
	7220H	5/8" Socket		



SET NO. 72102 3/8" DRIVE 9 PC. SOCKET SET— 6 POINT

• Weight: .91 lbs.



Product ID No.	Contents	Description	Contents	Description
72102	7208H	1/4" Socket	7220H	5/8" Socket
	7210H	5/16" Socket	7222H	11/16" Socket
	7212H	3/8" Socket	7224H	3/4" Socket
	7214H	7/16" Socket	2585	Socket Bar 9"
	7216H	1/2" Socket	2591	Socket Clip (9)
	7218H	9/16" Socket		



SET NO. 72116
3/8" DRIVE 15 PC. DEEP SOCKET SET—6 POINT

• Weight: 3.33 lbs.



Product ID No.	Contents	Description	Contents	Description
72116	7708H	1/4" Deep Socket	7722H	1 1/16" Deep Socket
	7709H	9/32" Deep Socket	7724H	3/4" Deep Socket
	7710H	5/16" Deep Socket	7726H	13/16" Deep Socket
	7711H	11/32" Deep Socket	7728H	7/8" Deep Socket
	7712H	3/8" Deep Socket	7730H	15/16" Deep Socket
	7714H	7/16" Deep Socket	7732H	1" Deep Socket
	7716H	1/2" Deep Socket	2587	Socket Bar 17"
	7718H	9/16" Deep Socket	2591	Socket Clip (15)
	7720H	5/8" Deep Socket		



SET NO. 72112
3/8" DRIVE 9 PC. DEEP SOCKET SET—6 POINT

• Weight: 2.09 lbs.



Product ID No.	Contents	Description	Contents	Description
72112	7708H	1/4" Deep Socket	7720H	5/8" Deep Socket
	7710H	5/16" Deep Socket	7722H	1 1/16" Deep Socket
	7712H	3/8" Deep Socket	7724H	3/4" Deep Socket
	7714H	7/16" Deep Socket	2585	Socket Bar 9"
	7716H	1/2" Deep Socket	2591	Socket Clip (9)
	7718H	9/16" Deep Socket		



SET NO. 72122
3/8" DRIVE 6 PC. MAGNETIC SOCKET SET FOR SELF-TAPPING SCREWS—6 POINT

• Weight: .64 lbs.



Product ID No.	Contents	Description
72122	7208PKM	1/4" Magnetic Socket
	7210PKM	5/16" Magnetic Socket
	7212PKM	3/8" Magnetic Socket
	7214PKM	7/16" Magnetic Socket
	7216PKM	1/2" Magnetic Socket
	7218PKM	9/16" Magnetic Socket
	2584	Socket Bar 6-1/4"
	2591	Socket Clip (6)



SET NO. 72132
3/8" DRIVE 7 PC. TORX®* SOCKET SET

• Weight: .71 lbs.

Product ID No.	Contents	Description
72132	7206TX	E6 Torx Socket
	7207TX	E7 Torx Socket
	7208TX	E8 Torx Socket
	7210TX	E10 Torx Socket
	7212TX	E12 Torx Socket
	7214TX	E14 Torx Socket
	7216TX	E16 Torx Socket
	2584	Socket Bar 6-1/4"
	2591	Socket Clip (7)

*Torx® is a registered trademark of Textron



SET NO. 72142
3/8" DRIVE 5 PC. UNIVERSAL SOCKET SET—6 POINT

• Weight: 1.55 lb



Product ID No.	Contents	Description
72142	7273P	3/8" Universal Socket
	7274P	7/16" Universal Socket
	7275P	1/2" Universal Socket
	7276P	9/16" Universal Socket
	7277P	5/8" Universal Socket
	2584	Socket Bar 6-1/4"
	2591	Socket Clip (5)



SET NO. 72156
10 PC. HEX BIT SOCKET SET—3/8" AND 1/2" DRIVE

• Weight: 2.56 lbs.

Product ID No.	Contents	Description
72156	72901/8	1/8" Hex Bit Socket, 3/8" Dr.
	72905/32	5/32" Hex Bit Socket, 3/8" Dr.
	72903/16	3/16" Hex Bit Socket, 3/8" Dr.
	72907/32	7/32" Hex Bit Socket, 3/8" Dr.
	72901/4	1/4" Hex Bit Socket, 3/8" Dr.
	72905/16	5/16" Hex Bit Socket, 3/8" Dr.
	72903/8	3/8" Hex Bit Socket, 3/8" Dr.
	74411/2	1/2" Hex Bit Socket, 1/2" Dr.
	74419/16	9/16" Hex Bit Socket, 1/2" Dr.
	74415/8	5/16" Hex Bit Socket, 1/2" Dr.
	4968 PB	Blow Molded Box



SET NO. 72152 3/8" DRIVE 7 PC. HEX BIT SOCKET SET

• Weight: .70 lbs.

Product ID No.	Contents	Description
72152	72901/8	1/8" Hex Bit Socket
	72905/32	5/32" Hex Bit Socket
	72903/16	3/16" Hex Bit Socket
	72907/32	7/32" Hex Bit Socket
	72901/4	1/4" Hex Bit Socket
	72905/16	5/16" Hex Bit Socket
	72903/8	3/8" Hex Bit Socket
	2585	Socket Bar 9"
	2591	Socket Clip (7)



SET NO. 7099A 3/8" DRIVE 13 PC. HAND IMPACT DRIVER SET

- Designed to loosen hard to turn bolts and nuts.
- Hand Impact Driver has heavy-duty spring for added torque.
- Popular interchangeable bits are packaged in plastic blow molded box for easy storage.
- Weight: 1.92 lbs.

Product ID No.	Contents	Description	Length
7099A	7099	Hand Impact Driver, 3/8" Driver	5-1/2"
	60002	#1 Phillips, 1/4" Hex	1"
	60008	#2 Phillips, 1/4" Hex	1"
	60020	#3 Phillips, 1/4" Hex	1"
	60202	4F-5R Slotted, Insert Bit, 1/4" Hex	1"
	60208	10F-12R Slotted, Insert Bit, 1/4" Hex	1"
	60050	#1 Phillips, 5/16" Hex	1-1/4"
	60052	#2 Phillips, 5/16" Hex	1-1/4"
	60054	#3 Phillips, 5/16" Hex	1-1/4"
	60256	10F-12R Slotted, Insert Bit, 5/16" Hex	1-1/2"
	60262	14F-16R Slotted, Insert Bit, 5/16" Hex	1-1/2"
	6930	Bit Holder, 3/8" Drive, 5/16" Hex	1-5/16"
	6931	Bit Holder, 3/8" Drive, 1/4" Hex	1-1/4"



SET NO. 72202 3/8" DRIVE 11 PC. **METRIC** SOCKET SET—6 POINT

• Weight: 1.01 lbs.



Product ID No.	Contents	Description	Contents	Description
72202	7207M	7 mm Socket	7214M	14 mm Socket
	7208M	8 mm Socket	7215M	15 mm Socket
	7209M	9 mm Socket	7216M	16 mm Socket
	7210M	10 mm Socket	7217M	17 mm Socket
	7211M	11 mm Socket	2585	Socket Bar 9"
	7212M	12 mm Socket	2591	Socket Clip (11)
	7213M	13 mm Socket		



SET NO. 72206 3/8" DRIVE 19 PC. **METRIC** SOCKET SET—6 POINT

• Weight: 2.22 lbs.



Product ID No.	Contents	Description	Contents	Description
72206	7206M	6 mm Socket	7217M	17 mm Socket
	7207M	7 mm Socket	7218M	18 mm Socket
	7208M	8 mm Socket	7219M	19 mm Socket
	7209M	9 mm Socket	7220M	20 mm Socket
	7210M	10 mm Socket	7221M	21 mm Socket
	7211M	11 mm Socket	7222M	22 mm Socket
	7212M	12 mm Socket	7223M	23 mm Socket
	7213M	13 mm Socket	7224M	24 mm Socket
	7214M	14 mm Socket	2587	Socket Bar 17"
	7215M	15 mm Socket	2591	Socket Clip (19)
	7216M	16 mm Socket		



SET NO. 72212 3/8" DRIVE 11 PC. **METRIC** DEEP SOCKET SET—6 POINT

• Weight: 2.55 lbs.



Product ID No.	Contents	Description	Contents	Description
72212	7007M	7 mm Deep Socket	7014M	14 mm Deep Socket
	7008M	8 mm Deep Socket	7015M	15 mm Deep Socket
	7009M	9 mm Deep Socket	7016M	16 mm Deep Socket
	7010M	10 mm Deep Socket	7017M	17 mm Deep Socket
	7011M	11 mm Deep Socket	2585	Socket Bar 9"
	7012M	12 mm Deep Socket	2591	Socket Clip (11)
	7013M	13 mm Deep Socket		



SET NO. 72216
3/8" DRIVE 19 PC. *METRIC* DEEP
SOCKET SET—6 POINT

• Weight: 5.32 lbs.



Product ID No.	Contents	Description	Contents	Description
72216	7006M	6 mm Deep Socket	7017M	17 mm Deep Socket
	7007M	7 mm Deep Socket	7018M	18 mm Deep Socket
	7008M	8 mm Deep Socket	7019M	19 mm Deep Socket
	7009M	9 mm Deep Socket	7020M	20 mm Deep Socket
	7010M	10 mm Deep Socket	7021M	21 mm Deep Socket
	7011M	11 mm Deep Socket	7022M	22 mm Deep Socket
	7012M	12 mm Deep Socket	7023M	23 mm Deep Socket
	7013M	13 mm Deep Socket	7024M	24 mm Deep Socket
	7014M	14 mm Deep Socket	2587	Socket Bar 17"
	7015M	15 mm Deep Socket	2591	Socket Clip (19)
	7016M	16 mm Deep Socket		



SET NO. 72252
3/8" DRIVE 5 PC. *METRIC* HEX BIT SOCKET SET

• Weight: 70 lbs.

Product ID No.	Contents	Description
72252	7290-4M	4 mm Hex Bit Socket
	7290-5M	5 mm Hex Bit Socket
	7290-6M	6 mm Hex Bit Socket
	7290-8M	8 mm Hex Bit Socket
	7290-10M	10 mm Hex Bit Socket
	2584	Socket Bar 6-1/4"
	2591	Socket Clip (5)



SET NO. 74106
1/2" DRIVE 19 PC. SOCKET SET—6 POINT

• Weight: 7.07 lbs.



Product ID No.	Contents	Description	Contents	Description
74106	7412H	3/8" Socket	7434H	1-1/16" Socket
	7414H	7/16" Socket	7436H	1-1/8" Socket
	7416H	1/2" Socket	7438H	1-3/16" Socket
	7418H	9/16" Socket	7440H	1-1/4" Socket
	7420H	5/8" Socket	7442H	1-5/16" Socket
	7422H	11/16" Socket	7444H	1-3/8" Socket
	7424H	3/4" Socket	7446H	1-7/16" Socket
	7426H	13/16" Socket	7448H	1-1/2" Socket
	7428H	7/8" Socket	2585	Socket Bar 9"
	7430H	15/16" Socket	2587	Socket Bar 17"
	7432H	1" Socket	2592	Socket Clip (19)



SET NO. 74102
1/2" DRIVE 11 PC. SOCKET SET—6 POINT

• Weight: 3.07 lbs.



Product ID No.	Contents	Description
74102	7416H	1/2" Socket
	7418H	9/16" Socket
	7420H	5/8" Socket
	7422H	11/16" Socket
	7424H	3/4" Socket
	7426H	13/16" Socket
	7428H	7/8" Socket
	7430H	15/16" Socket
	7432H	1" Socket
	7434H	1-1/16" Socket
	7436H	1-1/8" Socket
	2586	Socket Bar 13"
	2592	Socket Clip (11)



SET NO. 74104 1/2" DRIVE 15 PC. SOCKET SET—6 POINT

• Weight: 4.05 lbs.



Product ID No.	Contents	Description	Contents	Description
74104	7412H	3/8" Socket	7430H	15/16" Socket
	7414H	7/16" Socket	7432H	1" Socket
	7416H	1/2" Socket	7434H	1-1/16" Socket
	7418H	9/16" Socket	7436H	1-1/8" Socket
	7420H	5/8" Socket	7438H	1-3/16" Socket
	7422H	11/16" Socket	7440H	1-1/4" Socket
	7424H	3/4" Socket	2584	Socket Bar 6-1/4"
	7426H	13/16" Socket	2587	Socket Bar 17"
	7428H	7/8" Socket	2592	Socket Clip (15)



SET NO. 74114 1/2" DRIVE 15 PC. DEEP SOCKET SET—6 POINT

• Weight: 8.8 lbs.



Product ID No.	Contents	Description	Contents	Description
74114	7312H	3/8" Deep Socket	7330H	15/16" Deep Socket
	7314H	7/16" Deep Socket	7332H	1" Deep Socket
	7316H	1/2" Deep Socket	7334H	1-1/16" Deep Socket
	7318H	9/16" Deep Socket	7336H	1-1/8" Deep Socket
	7320H	5/8" Deep Socket	7338H	1-3/16" Deep Socket
	7322H	11/16" Deep Socket	7340H	1-1/4" Deep Socket
	7324H	3/4" Deep Socket	2584	Socket Bar 6-1/4"
	7326H	13/16" Deep Socket	2587	Socket Bar 17"
	7328H	7/8" Deep Socket	2592	Socket Clip (15)



SET NO. 74116 1/2" DRIVE 19 PC. DEEP SOCKET SET—6 POINT

• Weight: 13.41 lbs.



Product ID No.	Contents	Description	Contents	Description
74116	7312H	3/8" Deep Socket	7334H	1-1/16" Deep Socket
	7314H	7/16" Deep Socket	7336H	1-1/8" Deep Socket
	7316H	1/2" Deep Socket	7338H	1-3/16" Deep Socket
	7318H	9/16" Deep Socket	7340H	1-1/4" Deep Socket
	7320H	5/8" Deep Socket	7342H	1-5/16" Deep Socket
	7322H	11/16" Deep Socket	7344H	1-3/8" Deep Socket
	7324H	3/4" Deep Socket	7346H	1-7/16" Deep Socket
	7326H	13/16" Deep Socket	7348H	1-1/2" Deep Socket
	7328H	7/8" Deep Socket	2585	Socket Bar 9"
	7330H	15/16" Deep Socket	2587	Socket Bar 17"
	7332H	1" Deep Socket	2592	Socket Clip (19)



SET NO. 74112 1/2" DRIVE 11 PC. DEEP SOCKET SET—6 POINT

• Weight: 7.6 lbs.



Product ID No.	Contents	Description
74112	7316H	1/2" Deep Socket
	7318H	9/16" Deep Socket
	7320H	5/8" Deep Socket
	7322H	11/16" Deep Socket
	7324H	3/4" Deep Socket
	7326H	13/16" Deep Socket
	7328H	7/8" Deep Socket
	7330H	15/16" Deep Socket
	7332H	1" Deep Socket
	7334H	1-1/16" Deep Socket
	7336H	1-1/8" Deep Socket
	2586	Socket Bar 13"
	2592	Socket Clip (11)



SET NO. 74206
1/2" DRIVE 25 PC. METRIC SOCKET SET—6 POINT

• Weight: 7.75 lbs.



Product ID No.	Contents	Description	Contents	Description
74206	7408M	8 mm Socket	7421M	21 mm Socket
	7409M	9 mm Socket	7422M	22 mm Socket
	7410M	10 mm Socket	7423M	23 mm Socket
	7411M	11 mm Socket	7424M	24 mm Socket
	7412M	12 mm Socket	7425M	25 mm Socket
	7413M	13 mm Socket	7426M	26 mm Socket
	7414M	14 mm Socket	7427M	27 mm Socket
	7415M	15 mm Socket	7428M	28 mm Socket
	7416M	16 mm Socket	7429M	29 mm Socket
	7417M	17 mm Socket	7430M	30 mm Socket
	7418M	18 mm Socket	7432M	32 mm Socket
	7419M	19 mm Socket	7436M	36 mm Socket
	7420M	20 mm Socket	2587	Socket Bar 17" (2)
			2592	Socket Clip (25)



SET NO. 74202
1/2" DRIVE 10 PC. METRIC SOCKET SET—6 POINT

• Weight: 1.95 lbs.



Product ID No.	Contents	Description	Contents	Description
74202	7410M	10 mm Socket	7416M	16 mm Socket
	7411M	11 mm Socket	7417M	17 mm Socket
	7412M	12 mm Socket	7418M	18 mm Socket
	7413M	13 mm Socket	7419M	19 mm Socket
	7414M	14 mm Socket	2586	Socket Bar 13"
	7415M	15 mm Socket	2592	Socket Clip (10)



SET NO. 74204
1/2" DRIVE 15 PC. METRIC SOCKET SET—6 POINT

• Weight: 3.29 lbs.



Product ID No.	Contents	Description	Contents	Description
74204	7410M	10 mm Socket	7419M	19 mm Socket
	7411M	11 mm Socket	7420M	20 mm Socket
	7412M	12 mm Socket	7421M	21 mm Socket
	7413M	13 mm Socket	7422M	22 mm Socket
	7414M	14 mm Socket	7423M	23 mm Socket
	7415M	15 mm Socket	7424M	24 mm Socket
	7416M	16 mm Socket	2587	Socket Bar 17"
	7417M	17 mm Socket	2592	Socket Clip (15)
	7418M	18 mm Socket		



SET NO. 74142
1/2" DRIVE 7 PC. UNIVERSAL SOCKET SET—6 POINT

• Weight: 4.22 lbs.



Product ID No.	Contents	Description
74142	7474P	7/16" Universal Socket
	7475P	1/2" Universal Socket
	7476P	9/16" Universal Socket
	7477P	5/8" Universal Socket
	7478P	11/16" Universal Socket
	7479P	3/4" Universal Socket
	7480P	13/16" Universal Socket
	2585	Socket Bar 9"
	2592	Socket Clip (7)



SET NO. 74216
1/2" DRIVE 25 PC. METRIC DEEP SOCKET SET—6 POINT

• Weight: 15.74 lbs.



Product ID No.	Description	Product ID No.	Description
7308M	8 mm Deep Socket	7321M	21 mm Deep Socket
7309M	9 mm Deep Socket	7322M	22 mm Deep Socket
7310M	10 mm Deep Socket	7323M	23 mm Deep Socket
7311M	11 mm Deep Socket	7324M	24 mm Deep Socket
7312M	12 mm Deep Socket	7325M	25 mm Deep Socket
7313M	13 mm Deep Socket	7326M	26 mm Deep Socket
7314M	14 mm Deep Socket	7327M	27 mm Deep Socket
7315M	15 mm Deep Socket	7328M	28 mm Deep Socket
7316M	16 mm Deep Socket	7329M	29 mm Deep Socket
7317M	17 mm Deep Socket	7330M	30 mm Deep Socket
7318M	18 mm Deep Socket	7332M	32 mm Deep Socket
7319M	19 mm Deep Socket	7336M	36 mm Deep Socket
7320M	20 mm Deep Socket	2587	Socket Bar 17" (2)
		2592	Socket Clip (25)



SET NO. 74152 1/2" DRIVE 7 PC. HEX BIT SOCKET SET

• Weight: 2.35 lbs.

Product ID No.	Contents	Description
74152	74411/4	1/4" Hex Bit Socket
	74415/16	5/16" Hex Bit Socket
	74413/8	3/8" Hex Bit Socket
	74417/16	7/16" Hex Bit Socket
	74411/2	1/2" Hex Bit Socket
	74419/16	9/16" Hex Bit Socket
	74415/8	5/8" Hex Bit Socket
	2585	Socket Bar 9"
	2592	Socket Clip (7)



SET NO. 74252 1/2" DRIVE 6 PC. **METRIC** HEX BIT SOCKET SET

• Weight: 1.84 lbs.

Product ID No.	Contents	Description
74252	7441-6M	6 mm Hex Bit Socket
	7441-8M	8 mm Hex Bit Socket
	7441-10M	10 mm Hex Bit Socket
	7441-12M	12 mm Hex Bit Socket
	7441-14M	14 mm Hex Bit Socket
	7441-17M	17 mm Hex Bit Socket
	2585	Socket Bar 9"
	2592	Socket Clip (6)



SET NO. 74214 1/2" DRIVE 15 PC. **METRIC** DEEP SOCKET SET— 6 POINT

• Weight: 6.63 lbs.



Product ID No.	Contents	Description	Contents	Description
74214	7310M	10 mm Deep Socket	7319M	19 mm Deep Socket
	7311M	11 mm Deep Socket	7320M	20 mm Deep Socket
	7312M	12 mm Deep Socket	7321M	21 mm Deep Socket
	7313M	13 mm Deep Socket	7322M	22 mm Deep Socket
	7314M	14 mm Deep Socket	7323M	23 mm Deep Socket
	7315M	15 mm Deep Socket	7324M	24 mm Deep Socket
	7316M	16 mm Deep Socket	2587	Socket Bar 17"
	7317M	17 mm Deep Socket	2592	Socket Clip (15)
	7318M	18 mm Deep Socket		



SET NO. 07500-10 3/4" DRIVE 10 PC. SOCKET SET—6 POINT

• Weight: 7.10 lbs

Product ID No.	Contents	Description
07500-10	07512	3/4" Socket
	07513	13/16" Socket
	07514	7/8" Socket
	07515	15/16" Socket
	07516	1" Socket
	07517	1-1/16" Socket
	07518	1-1/8" Socket
	07519	1-3/16" Socket
	07520	1-1/4" Socket
	07521	1-5/16" Socket



SET NO. 74212 1/2" DRIVE 10 PC. **METRIC** DEEP SOCKET SET— 6 POINT

• Weight: 4.40 lbs.



Product ID No.	Contents	Description	Contents	Description
74212	7310M	10 mm Deep Socket	7316M	16 mm Deep Socket
	7311M	11 mm Deep Socket	7317M	17 mm Deep Socket
	7312M	12 mm Deep Socket	7318M	18 mm Deep Socket
	7313M	13 mm Deep Socket	7319M	19 mm Deep Socket
	7314M	14 mm Deep Socket	2587	Socket Bar 13"
	7315M	15 mm Deep Socket	2592	Socket Clip (10)



1/4" DRIVE STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6906H	3/16"	5/16"	1/2"	11/64"	1/2"	7/8"	.02
6907H	7/32"	11/32"	1/2"	13/64"	1/2"	7/8"	.02
6908H	1/4"	25/64"	1/2"	7/32"	1/2"	7/8"	.02
6909H	9/32"	7/16"	1/2"	15/64"	1/2"	7/8"	.03
6910H	5/16"	1/2"	1/2"	15/64"	1/2"	7/8"	.03
6911H	11/32"	33/64"	33/64"	17/64"	1/2"	7/8"	.03
6912H	3/8"	9/16"	9/16"	17/64"	1/2"	7/8"	.04
6914H	7/16"	21/32"	21/32"	5/16"	1/2"	7/8"	.04
6916H	1/2"	45/64"	45/64"	3/8"	1/2"	7/8"	.05
6918H	9/16"	51/64"	51/64"	3/8"	1/2"	7/8"	.06

Fed'l Specs.: GGG-W-660A
ANSI Spec.: B107.3



1/4" DRIVE STANDARD LENGTH SOCKETS—12 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6906	3/16"	5/16"	1/2"	1/8"	1/2"	7/8"	.02
6907	7/32"	11/32"	1/2"	13/34"	1/2"	7/8"	.02
6908	1/4"	25/64"	1/2"	5/32"	1/2"	7/8"	.02
6909	9/32"	7/16"	1/2"	11/64"	1/2"	7/8"	.03
6910	5/16"	1/2"	1/2"	3/16"	1/2"	7/8"	.03
6911	11/32"	33/64"	33/64"	13/64"	1/2"	7/8"	.03
6912	3/8"	9/16"	9/16"	7/32"	1/2"	7/8"	.04
6914	7/16"	21/32"	21/32"	1/4"	1/2"	7/8"	.04
6916	1/2"	11/16"	11/16"	9/32"	1/2"	7/8"	.05
6918	9/16"	51/64"	51/64"	21/64"	1/2"	7/8"	.06
6920	5/8"	7/8"	7/8"	23/64"	1/2"	7/8"	.06

ANSI Spec.: B107.3



1/4" DRIVE STANDARD LENGTH MAGNETIC SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6906HM	3/16"	5/16"	1/2"	5/32"	—	7/8"	.02
6907HM	7/32"	23/64"	1/2"	5/32"	—	7/8"	.02
6908HM	1/4"	25/64"	1/2"	11/64"	—	7/8"	.02
6910HM	5/16"	1/2"	1/2"	3/16"	—	15/16"	.03
6912HM	3/8"	9/16"	9/16"	7/32"	—	15/16"	.04
6914HM	7/16"	21/32"	21/32"	15/64"	—	1"	.04
6916HM	1/2"	11/16"	11/16"	17/64"	—	1"	.05



1/4" DRIVE STANDARD LENGTH MAGNETIC POWER SOCKETS FOR SELF-TAPPING SCREWS—6 POINT

- Higher hardness for longer life.
- Designed for power applications such as nut runners, multiple spindle machines, angle head nut drivers, etc.
- Not for impact use.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6906PKM	3/16"	5/16"	1/2"	5/32"	—	7/8"	.02
6908PKM	1/4"	25/64"	1/2"	11/16"	—	7/8"	.02
6910PKM	5/16"	1/2"	1/2"	11/64"	—	59/64"	.03
6911PKM	11/32"	33/64"	33/64"	7/32"	—	59/64"	.03
6912PKM	3/8"	9/16"	9/16"	7/32"	—	59/64"	.04
6914PKM	7/16"	5/8"	5/8"	1/4"	—	1"	.04
6916PKM	1/2"	11/16"	11/16"	17/64"	—	1"	.05

ANSI Spec.: B107.3




1/4" DRIVE TORX®* SOCKETS

Product ID No.		L	Weight lbs.
6904TX	E4	1"	.02
6905TX	E5	1"	.02
6906TX	E6	1"	.02
6907TX	E7	1"	.02
6908TX	E8	1"	.02

* Torx® is a registered trademark of Camcar Division of Tectron.

REFERENCE MEASUREMENT KEY

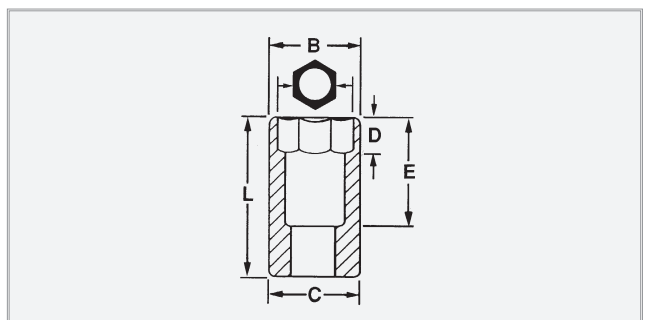

WARNING: WORK SAFELY WITH TOOLS WEAR SAFETY GOGGLES.

Toll Free Customer Service Number: 1-800-800-TOOL
Customer Service FAX Number: 1-770-385-3708



1/4" DRIVE DEEP LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6506H	3/16"	5/16"	1/2"	1/4"	1-5/8"	2"	.04
6508H	1/4"	25/64"	1/2"	9/32"	1-5/8"	2"	.04
6509H	9/32"	7/16"	1/2"	19/64"	1-5/8"	2"	.06
6510H	5/16"	1/2"	1/2"	5/16"	1-5/8"	2"	.06
6511H	11/32"	33/64"	33/64"	11/32"	1-5/8"	2"	.06
6512H	3/8"	9/16"	9/16"	3/8"	1-5/8"	2"	.08
6514H	7/16"	21/32"	21/32"	3/8"	1-5/8"	2"	.08
6516H	1/2"	11/16"	11/16"	7/16"	1-5/8"	2"	.10
6518H	9/16"	51/64"	51/64"	7/16"	1-5/8"	2"	.12
6520H	7/8"	7/8"	7/8"	7/16"	1-5/8"	2"	.12

Fed'l Specs.: GGG-W-660A



1/4" DRIVE METRIC STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
6904M	4	6.7	12.6	4.0	12.7	22.2	.016
6905M	5	7.9	12.6	4.7	12.7	22.2	.016
69055M	5.5	8.9	12.6	4.7	12.7	22.2	.018
6906M	6	10.0	12.6	5.5	12.7	22.2	.019
6907M	7	11.0	12.6	5.5	12.7	22.2	.020
6908M	8	12.6	12.6	5.5	12.7	22.2	.020
6909M	9	13.1	13.1	6.4	12.7	22.2	.030
6910M	10	14.1	14.1	6.4	12.7	22.2	.040
6911M	11	16.5	16.5	7.1	12.7	22.2	.050
6912M	12	17.3	17.3	7.5	12.7	22.2	.059
6913M	13	18.4	18.4	7.9	12.7	22.2	.066

ANSI Spec.: B107.02



1/4" DRIVE EXTRA DEEP LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
6508HL	1/4"	1/2"	27/64"	9/32"	2-5/8"	3"	.06
6510HL	5/16"	1/2"	27/64"	5/16"	2-5/8"	3"	.06
6511HL	11/32"	23/64"	29/64"	11/32"	2-5/8"	3"	.06
6512HL	3/8"	9/16"	31/64"	3/8"	2-5/8"	3"	.06
6514HL	7/16"	21/32"	37/64"	3/8"	2-5/8"	3"	.06
6516HL	1/2"	11/16"	39/64"	7/16"	2-5/8"	3"	.06



1/4" DRIVE METRIC STANDARD LENGTH SOCKETS—SURFACE DRIVE


Product ID No.	mm	B	C	D	E	L	Weight lbs.
6910MHS	10	14.1	14.1	6.4	14.3	23.8	.040
6911MHS	11	15.7	15.7	7.1	15.9	25.4	.050
6912MHS	12	17.3	17.3	7.5	15.9	25.4	.057
6913MHS	13	18.4	18.4	7.9	15.9	25.4	.066
6914MHS	14	20.3	20.3	9.5	15.9	25.4	.075
6915MHS	15	21.1	21.1	9.5	15.9	25.4	.085



1/4" DRIVE EXTRA DEEP LENGTH SOCKETS—12 POINT

Product ID No.	in.	B	C	D	E	L	Weight lbs.
6508L	1/4"	1/2"	27/64"	9/32"	2-5/8"	3"	.06
6510L	5/16"	1/2"	27/64"	5/16"	2-5/8"	3"	.06
6512L	3/8"	9/16"	31/64"	3/8"	2-5/8"	3"	.06
6514L	7/16"	21/32"	37/64"	3/8"	2-5/8"	3"	.06
6516L	1/2"	11/16"	39/64"	7/16"	2-5/8"	3"	.06

REFERENCE MEASUREMENT KEY





1/4" DRIVE
METRIC DEEP LENGTH
SOCKETS—SURFACE DRIVE

Product ID No.	mm	B	C	D	E	L	Weight lbs.
6510MHS	10	14.1	14.1	6.4	14.3	50.8	.07
6511MHS	11	15.7	15.7	9.5	41.3	50.8	.09
6512MHS	12	17.3	17.3	10.3	41.3	50.8	.110
6513MHS	13	18.4	18.4	11.1	41.3	50.8	.15
6514MHS	14	20.3	20.3	11.1	41.3	50.8	.15
6515MHS	15	21.1	21.1	11.1	41.3	50.8	.15



1/4" DRIVE
METRIC DEEP LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
6506MH	10	14.1	14.1	6.4	14.3	23.8	.04
6507MH	7	11.0	12.6	7.5	41.3	50.8	.04
6508MH	8	12.6	12.6	7.9	41.3	50.8	.06
6509MH	9	13.1	13.1	7.9	41.3	50.8	.06
6510MH	10	14.1	14.1	9.5	41.3	50.8	.07
6511MH	11	16.5	16.5	9.5	41.3	50.8	.09
6512MH	12	17.3	17.3	10.3	41.3	50.8	.11
6513MH	13	18.4	18.4	11.1	41.3	50.8	.15



3/8" DRIVE
STANDARD LENGTH SOCKETS—12 POINT

Product ID No.	in.	B	C	D	E	L	Weight lbs.
7208	1/4"	7/16"	11/16"	9/32"	19/32"	1-3/32"	.06
7209	9/32"	31/64"	11/16"	5/16"	19/32"	1-3/32"	.06
7210	5/16"	1/2"	11/16"	1/4"	19/32"	1-3/32"	.06
7211	11/32"	35/64"	11/16"	21/64"	19/32"	1-3/32"	.06
7212	3/8"	19/32"	11/16"	3/8"	19/32"	1-3/32"	.06
7214	7/16"	11/16"	11/16"	3/8"	19/32"	1-3/32"	.06
7216	1/2"	3/4"	3/4"	3/8"	19/32"	1-3/32"	.08
7218	9/16"	51/64"	13/16"	9/16"	19/32"	1-3/32"	.08
7220	5/8"	29/32"	29/32"	9/16"	19/32"	1-3/32"	.11
7222	11/16"	1"	1"	9/16"	19/32"	1-3/32"	.16
7224	3/4"	1-3/64"	1-1/16"	17/32"	19/32"	1-3/32"	.17
7226	13/16"	1-13/64"	1-13/64"	11/16"	23/32"	1-7/32"	.20
7228	7/8"	1-9/32"	1-9/32"	11/16"	23/32"	1-7/32"	.22
7230	15/16"	1-23/64"	1-23/64"	51/64"	27/32"	1-5/16"	.30
7232	1"	1-1/2"	1-1/2"	51/64"	27/32"	1-5/16"	.38

ANSI Spec: B107.2



3/8" DRIVE
STANDARD LENGTH SOCKETS—6 POINT




Product ID No.	in.	B	C	D	E	L	Weight lbs.
7208H	1/4"	7/16"	11/16"	9/32"	19/32"	1-3/32"	.06
7210H	5/16"	1/2"	11/16"	5/32"	19/32"	1-3/32"	.06
7211H	11/32"	35/64"	11/16"	5/32"	19/32"	1-3/32"	.06
7212H	3/8"	19/32"	11/16"	3/8"	19/32"	1-3/32"	.06
7214H	7/16"	11/16"	11/16"	3/8"	19/32"	1-3/32"	.06
7216H	1/2"	3/4"	3/4"	3/8"	19/32"	1-3/32"	.08
7218H	9/16"	13/16"	13/16"	9/16"	19/32"	1-3/32"	.08
7220H	5/8"	29/32"	29/32"	9/16"	19/32"	1-3/32"	.11
7222H	11/16"	1"	1"	9/16"	19/32"	1-3/32"	.16
7224H	3/4"	1-1/16"	1-1/16"	17/32"	19/32"	1-3/32"	.17
7226H	13/16"	1-3/16"	1-13/64"	9/32"	23/32"	1-7/32"	.20
7228H	7/8"	1-9/32"	1-9/32"	9/16"	23/32"	1-7/32"	.22
7230H	5/16"	1-23/64"	1-23/64"	11/16"	27/32"	1-5/16"	.30
7232H	1"	1-1/2"	1-1/2"	11/16"	27/32"	1-5/16"	.38

Fed' Spec.: GGG-W-660A

ANSI Spec.: B107.2

REFERENCE MEASUREMENT KEY

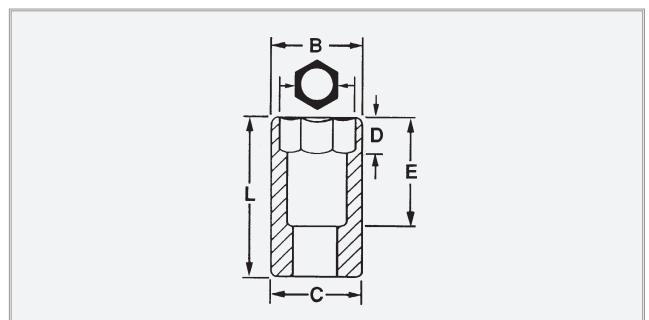

WARNING: WORK SAFELY WITH TOOLS WEAR SAFETY GOGGLES.

Toll Free Customer Service Number: 1-800-800-TOOL
Customer Service FAX Number: 1-770-385-3708



3/8" DRIVE STANDARD LENGTH MAGNETIC POWER SOCKETS FOR SELF-TAPPING SCREWS—6 POINT

- Higher hardness for longer life.
- Designed for power applications such as nut runners, multiple spindle machines, angle head nut drivers, etc.
- Not for compact use.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7208PKM	1/4"	13/32"	11/16"	5/32"	—	1-3/32"	.06
7210PKM	5/16"	33/64"	11/16"	3/16"	—	1-3/32"	.06
7212PKM	3/8"	9/16"	11/16"	7/32"	—	1-3/32"	.06
7214PKM	7/16"	21/32"	11/16"	15/64"	—	1-1/8"	.06
7216PKM	1/2"	47/64"	47/64"	1/4"	—	1-1/8"	.08
7218PKM	9/16"	13/16"	13/16"	19/64"	—	1-11/64"	.08

ANSI Spec.: B107.3



3/8" DRIVE STANDARD LENGTH MAGNETIC SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7208HM	1/4"	7/16"	11/16"	5/32"	—	1-3/32"	.06
7210HM	5/16"	1/2"	11/16"	3/16"	—	1-3/32"	.06
7212HM	3/8"	19/32"	11/16"	7/32"	—	1-3/32"	.06
7214HM	7/16"	11/16"	11/16"	15/64"	—	1-1/8"	.06
7216HM	1/2"	3/4"	3/4"	17/64"	—	1-1/8"	.08



3/8" DRIVE TORX®* SOCKETS

Product ID No.		L	Weight lbs.
7206TX	E6	1-1/4"	.06
7207TX	E7	1-1/4"	.06
7208TX	E8	1-1/4"	.06
7210TX	E10	1-1/4"	.06
7212TX	E12	1-1/4"	.07
7214TX	E14	1-1/4"	.07
7216TX	E16	1-1/4"	.07

* Torx® is a registered trademark of Tectron.



3/8" DRIVE STANDARD LENGTH SOCKETS—8 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7208S	1/4"	31/64"	11/16"	1/4"	1/2"	1"	.06
7214S	7/16"	13/16"	13/16"	21/64"	1/2"	1"	.06
7216S	1/2"	59/64"	15/16"	3/8"	9/16"	1-1/16"	.08
7218S	9/16"	1-3/32"	1-3/16"	9/16"	5/8"	1-1/8"	.08

ANSI Spec.: B107.2




3/8" DRIVE DEEP LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7708H	1/4"	7/16"	11/16"	1-9/32"	2-1/4"	2-3/4"	.11
7709H	9/32"	31/64"	11/16"	5/16"	2-1/4"	2-3/4"	.12
7710H	5/16"	33/64"	11/16"	21/64"	2-1/4"	2-3/4"	.13
7711H	11/32"	35/64"	11/16"	11/32"	2-1/4"	2-3/4"	.13
7712H	3/8"	19/32"	11/16"	3/8"	2-1/4"	2-3/4"	.14
7714H	7/16"	11/16"	11/16"	27/64"	2-1/4"	2-3/4"	.15
7716H	1/2"	3/4"	3/4"	15/32"	2-1/4"	2-3/4"	.18
7718H	9/16"	13/16"	13/16"	11/16"	2-1/4"	2-3/4"	.20
7720H	5/8"	29/32"	29/32"	11/16"	2-1/4"	2-3/4"	.29
7722H	11/16"	1"	1"	11/16"	2-1/4"	2-3/4"	.33
7724H	3/4"	1-1/16"	1-1/16"	43/64"	2-1/4"	2-3/4"	.35
7726H	13/16"	1-13/64"	1-13/64"	13/16"	2-1/8"	2-3/4"	.35
7728H	7/8"	1-9/32"	1-9/32"	13/16"	2-1/8"	2-3/4"	.39
7730H	15/16"	1-23/64"	1-23/64"	13/16"	2-1/8"	2-3/4"	.50
7732H	1"	1-1/2"	1-1/2"	13/16"	2-1/8"	2-3/4"	.59

ANSI Spec.: B107.2

REFERENCE MEASUREMENT KEY





3/8" DRIVE ADAPTERS

Product ID No.	F	M	L	Weight lbs.
7650	3/8" F x 1/2" M		1-5/16"	.12
7651	1/2" F x 3/8" M		1-7/16"	.18



3/8" DRIVE UNIVERSAL JOINT

- Patented "Pinless" design for greater safety and durability.

Product ID No.	L	Weight lbs.
7270P	2-11/32"	.29

Fed'l Specs.: GGG-W-660A



3/8" DRIVE UNIVERSAL SOCKETS—6 POINT

- Patented "Pinless" design for greater safety and durability.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7273P	3/8"	9/16"	31/32"	9/64"	13/32"	2-5/16"	.31
7274P	7/16"	21/32"	31/32"	15/64"	15/32"	2-3/8"	.31
7275P	1/2"	47/64"	31/32"	15/64"	17/32"	2-7/16"	.32
7276P	9/16"	27/32"	31/32"	17/64"	19/32"	2-15/32"	.33
7277P	5/8"	31/32"	31/32"	15/16"	19/32"	2-15/32"	.36



3/8" DRIVE HEX BITS

Product ID No.	in.	in.	in.	Weight lbs.	in.
7290 1/8	1/8"	1-5/8"	2-23/32"	.05	4980RKA
7290 5/32	5/32"	1-5/8"	2-23/32"	.05	4981RKA
7290 3/16	3/16"	1-5/8"	2-23/32"	.06	4982RKA
7290 7/32	7/32"	15/8"	2-23/32"	.07	4984RKA
7290 1/4	1/4"	1-5/8"	2-23/32"	.08	4985RKA
7290 5/16	5/16"	1-5/8"	2-23/32"	.10	4987RKA
7290 3/8	3/8"	1-5/8"	2-23/32"	.13	4988RKA



3/8" DRIVE

METRIC STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
7206M	6	10.7	17.3	5.5	10.7	23.4	25.0
7207M	7	12.2	17.3	6.0	10.7	23.4	25.0
7208M	8	13.0	17.3	7.9	13.5	26.2	25.0
7209M	9	14.7	17.3	8.7	13.5	26.2	25.0
7210M	10	17.3	17.3	9.5	13.5	26.2	25.0
7211M	11	17.3	17.3	10.3	13.5	26.2	25.0
7212M	12	18.2	18.2	11.1	13.5	26.2	40.0
7213M	13	19.1	19.1	11.1	13.5	27.8	31.8
7214M	14	20.5	20.5	14.2	15.1	27.8	35.0
7215M	15	21.8	21.8	14.2	15.1	27.8	45.4
7216M	16	23.0	23.0	14.2	15.1	27.8	48.8
7217M	17	25.4	25.4	14.2	15.1	27.8	50.0
7218M	18	26.2	26.2	14.2	15.1	27.8	62.0
7219M	19	26.8	26.8	13.4	15.1	27.8	74.4
7221M	21	29.4	29.4	13.4	15.1	27.8	107.4
7224M	24	33.0	33.0	13.4	15.1	27.8	136.4



3/8" DRIVE EXTENSIONS

Product ID No.	L	Weight lbs.
7175P	3"	.18
7176P	6"	.35
7178P	12"	.69

Fed'l Specs.: GGG-W-660A




3/8" DRIVE HAND IMPACT DRIVER

- Designed to loosen hard to turn bolts and screws.
- Heavy-Duty spring for added torque.

Product ID No.	L	Weight lbs.
7099	5-1/2"	1.66

REFERENCE MEASUREMENT KEY

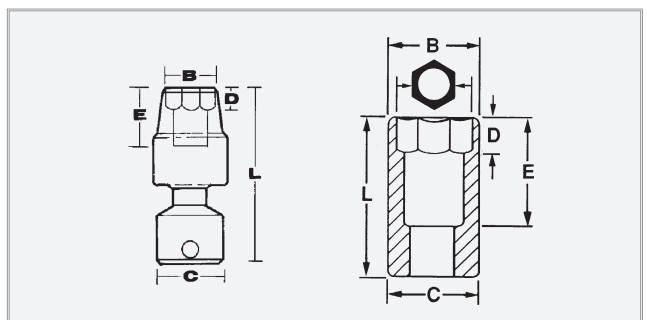



3/8" DRIVE METRIC DEEP LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
7006M	6	10.7	17.3	7.1	57.2	69.9	.10
7007M	7	12.2	17.3	8.0	57.2	69.9	.11
7008M	8	13.0	17.3	8.0	57.2	69.9	.11
7009M	9	14.7	17.3	9.5	57.2	69.9	.14
7010M	10	15.7	17.3	9.5	57.2	69.9	.14
7011M	11	17.3	17.3	10.3	57.2	69.9	.13
7012M	12	18.9	18.9	11.1	57.2	69.9	.165
7013M	13	19.1	19.1	11.9	57.2	69.9	.187
7014M	14	20.5	20.5	12.7	57.2	69.9	.176
7015M	15	21.8	21.8	17.5	57.2	69.9	.21
7016M	16	23.0	23.0	17.5	57.2	69.9	.263
7017M	17	25.4	25.4	17.5	57.2	69.9	.300
7018M	18	26.1	26.1	17.5	57.2	69.9	.300
7019M	19	26.8	26.8	17.5	57.2	69.9	.318



1/2" DRIVE STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7412H†*	3/8"	41/64"	15/16"	11/32"	27/32"	1-1/2"	.17
7414H†*	7/16"	23/32"	15/16"	13/32"	27/32"	1-1/2"	.17
7416H†*	1/2"	51/64"	15/16"	13/32"	27/32"	1-1/2"	.18
7418H†*	9/16"	7/8"	15/16"	7/16"	27/32"	1-1/2"	.18
7420H†*	5/8"	1"	1"	1/2"	27/32"	1-1/2"	.19
7422H†*	11/16"	1-1/32"	1-1/32"	1/2"	27/32"	1-1/2"	.20
7424H†*	3/4"	1-7/64"	1-7/64"	51/64"	27/32"	1-1/2"	.25
7426H†*	13/16"	1-13/64"	1-13/64"	11/16"	31/32"	1-5/8"	.29
7428H†*	7/8"	1-17/64"	1-9/32"	43/64"	31/32"	1-5/8"	.33
7430H†*	15/16"	1-23/64"	1-23/64"	51/64"	1-3/32"	1-3/4"	.44
7432H†*	1"	1-1/2"	1-1/2"	25/32"	1-3/32"	1-3/4"	.56
7434H†*	1-1/16"	1-33/64"	1-33/64"	25/32"	1-3/32"	1-3/4"	.59
7436H†*	1-1/8"	1-19/32"	1-19/32"	25/32"	1-1/32"	2"	.74
7438H	1-3/16"	1-19/32"	1-19/32"	3/4"	1-23/64"	2"	.76
7440H†*	1-1/4"	1-3/4"	1-3/4"	1-15/64"	1-11/32"	2"	.82
7442H*	1-5/16"	1-3/4"	1-3/4"	13/16"	63/64"	2"	.86
7444H*	1-3/8"	1-51/64"	1-5/8"	15/16"	1-3/32"	2-1/8"	.88
7446H*	1-7/16"	1-59/64"	1-5/8"	1"	1-37/64"	2-15/64"	1.01
7448H†	1-1/2"	2"	1-5/8"	1"	1-37/64"	2-15/64"	1.11

†Fed'l Specs.: GGG-W-660A

*ANSI Spec.: B107.2



3/8" DRIVE METRIC HEX BITS

Product ID No.	mm	B	C	Weight lbs.	Part No.
7290-4M	4	41.3	69.1	.06	1404MRKA
7290-5M	5	41.3	69.1	.06	1405MRKA
7290-6M	6	41.3	69.1	.08	1406MRKA
7290-8M	8	41.3	69.1	.10	1408MRKA
7290-10M	10	41.3	69.1	.14	1410MRKA




1/2" DRIVE STANDARD LENGTH MAGNETIC POWER SOCKETS FOR SELF-TAPPING SCREWS—6 POINT

- Higher hardness for longer life.
- Designed for power applications such as nut runners, multiple spindle machines, angle head nut drivers, etc.
- Not for impact use.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7412PKM	5/8"	41/64"	15/16"	7/32"	27/32"	1-1/2"	.15
7414PKM	7/16"	23/32"	15/16"	5/32"	5/32"	1-1/2"	.17
7416PKM	1/2"	51/64"	15/16"	1/4"	27/32"	1-1/2"	.17
7418PKM	9/16"	7/8"	15/16"	19/64"	27/32"	1-1/2"	.19

REFERENCE MEASUREMENT KEY

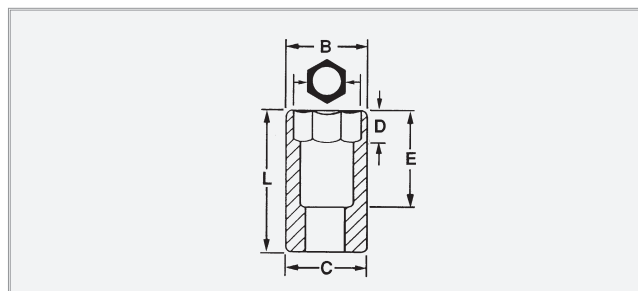



1/2" DRIVE STANDARD LENGTH SOCKETS—12 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7412*	3/8"	19/32"	15/16"	11/32"	27/32"	1-1/2"	.17
7414*	7/16"	23/32"	15/16"	13/32"	27/32"	1-1/2"	.17
7416*	1/2"	51/64"	15/16"	13/32"	27/32"	1-1/2"	.17
7418*	9/16"	7/8"	15/16"	7/16"	27/32"	1-1/2"	.18
7420*	5/8"	1"	1"	1/2"	27/32"	1-1/2"	.19
7422*	11/16"	1-1/32"	1-1/32"	1/2"	27/32"	1-1/2"	.20
7424*	3/4"	1-7/64"	1-7/64"	51/64"	27/32"	1-1/2"	.25
7426*	13/16"	1-13/64"	1-13/64"	11/16"	31/32"	1-5/8"	.29
7428*	7/8"	1-9/32"	1-9/32"	43/64"	31/32"	1-5/8"	.33
7430*	15/16"	1-23/64"	1-23/64"	51/64"	1-3/32"	1-3/4"	.44
7432*	1"	1-1/2"	1-1/2"	25/32"	1-3/32"	1-3/4"	.56
7434*	1-1/16"	1-33/64"	1-33/64"	25/32"	1-3/32"	1-3/4"	.59
7436*	1-1/8"	1-19/32"	1-19/32"	25/32"	1-1/32"	2"	.70
7438	1-3/16"	1-3/4"	1-3/4"	3/4"	1-1/64"	2"	.76
7440*	1-1/4"	1-3/4"	1-3/4"	3/4"	1-1/8"	2"	.82
7442*	1-5/16"	1-3/4"	1-3/4"	13/16"	63/64"	2"	.86
7444*	1-3/8"	1-51/64"	1-5/8"	13/16"	1-3/32"	2-1/8"	.88
7446*	1-7/16"	1-59/64"	1-5/8"	1"	1-37/64"	2-15/64"	1.01
7448	1-1/2"	2"	1-5/8"	1"	1-37/64"	2-15/64"	1.11

*ANSI Spec.: B107.2



1/2" DRIVE DEEP LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7312H	3/8"	19/32"	15/16"	5/16"	2-5/8"	3-1/4"	.36
7314H	7/16"	23/32"	15/16"	3/8"	2-5/8"	3-1/4"	.40
7316H	1/2"	51/64"	15/16"	7/16"	2-5/8"	3-1/4"	.41
7318H	9/16"	7/8"	15/16"	1/2"	2-5/8"	3-1/4"	.41
7320H	5/8"	1"	1"	9/16"	2-5/8"	3-1/4"	.41
7322H	11/16"	1-1/32"	1-1/32"	5/8"	2-5/8"	3-1/4"	.42
7324H	3/4"	1-7/64"	1-1/8"	1-5/32"	2-5/8"	3-1/4"	.49
7326H	13/16"	1-3/16"	1-3/16"	1-5/32"	2-5/8"	3-1/4"	.49
7328H	7/8"	1-19/64"	1-9/32"	1-13/32"	2-7/8"	3-1/2"	.54
7330H	15/16"	1-3/8"	1-3/8"	1-13/32"	2-7/8"	3-1/2"	.70
7332H	1"	1-1/2"	1-1/2"	1-13/32"	2-7/8"	3-1/2"	.82
7334H	1-1/16"	1-1/2"	1-33/64"	1-17/32"	2-7/8"	3-1/2"	.90
7336H	1-1/8"	1-5/8"	1-5/8"	1-13/32"	2-7/8"	3-1/2"	1.15
7338H	1-3/16"	1-13/16"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.18
7340H	1-1/4"	1-13/16"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.27
7342H	1-5/16"	1-7/8"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.36
7344H	1-3/8"	1-7/8"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.38
7346H	1-7/16"	2-1/16"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.61
7348H	1-1/2"	2-1/16"	1-21/32"	1-13/32"	2-7/8"	3-1/2"	1.80

ANSI Spec.: B107.2

* Torx® is a registered trademark of Textron.



1/2" DRIVE STANDARD LENGTH THIN WALL SOCKET—6 POINT




Product ID No.	in.	B	C	D	E	L	Weight lbs.
7436HT	11/8"	11/2"	11/2"	31/32"	31/32"	15/8"	.70



1/2" DRIVE TORX®* SOCKETS

Product ID No.		B	C	D	E	L	Weight lbs.
7414TX	E14	11/16"	7/8"	7/16"	27/32"	11/2"	.17
7418TX	E18	27/32"	7/8"	17/32"	27/32"	11/2"	.17
7420TX	E20	15/16"	15/16"	19/32"	27/32"	11/2"	.10

REFERENCE MEASUREMENT KEY

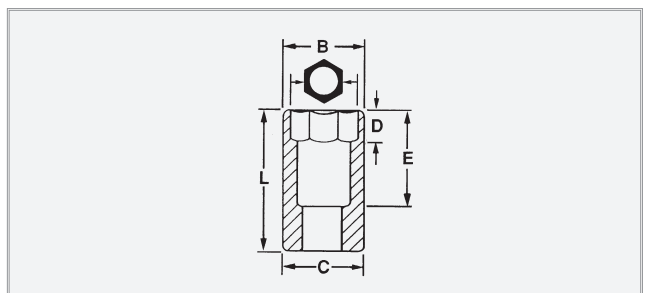

WARNING: WORK SAFELY WITH TOOLS WEAR SAFETY GOGGLES.

Toll Free Customer Service Number: 1-800-800-TOOL
Customer Service FAX Number: 1-770-385-3708



1/2" DRIVE STANDARD LENGTH SOCKETS—8 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7412S	3/8"	47/64"	15/16"	17/64"	27/32"	1-1/2"	.17
7414S	7/16"	53/64"	15/16"	19/64"	27/32"	1-1/2"	.17
7416S	1/2"	15/16"	15/16"	11/32"	27/32"	1-1/2"	.18
7418S	9/16"	1-1/32"	1-1/32"	3/8"	27/32"	1-1/2"	.21
7420S	5/8"	1-1/8"	1-1/8"	27/32"	27/32"	1-1/2"	.21
7422S	11/16"	1-3/16"	1-3/16"	27/32"	27/32"	1-1/2"	.29
7424S	3/4"	1-11/32"	1-11/32"	27/32"	27/32"	1-1/2"	.36
7426S	13/16"	1-3/8"	1-3/8"	27/32"	27/32"	1-1/2"	.39
7428S	7/8"	1-1/2"	1-1/2"	31/32"	31/32"	1-5/8"	.49
7430S	15/16"	1-5/8"	1-5/8"	1-1/64"	1-3/32"	1-3/4"	.68
7432S	1"	1-3/4"	1-3/4"	1-1/64"	1-3/32"	1-3/4"	.79
7434S	1-1/16"	1-27/32"	1-27/32"	1-1/64"	1-11/32"	1-3/4"	1.08

Fed'l Specs.: GGG-W-660A
ANSI Spec.: B107.2



1/2" DRIVE DEEP LENGTH SOCKETS—12 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7312	3/8"	19/32"	15/16"	5/16"	2-19/32"	3-1/4"	.36
7314	7/16"	23/32"	15/16"	3/8"	2-5/8"	3-1/4"	.40
7316	1/2"	51/64"	15/16"	7/16"	2-5/8"	3-1/4"	.41
7318	9/16"	7/8"	15/16"	1/2"	2-5/8"	3-1/4"	.41
7320	5/8"	1"	1"	9/16"	2-5/8"	3-1/4"	.41
7322	11/16"	1-1/32"	1-1/32"	5/8"	2-5/8"	3-1/4"	.42
7324	3/4"	1-7/64"	1-1/8"	1-5/32"	2-5/8"	3-1/4"	.49
7326	13/16"	1-3/16"	1-3/16"	1-5/32"	2-5/8"	3-1/4"	.49
7328	7/8"	1-19/64"	1-19/64"	1-13/32"	2-7/8"	3-1/2"	.54
7330	15/16"	1-3/8"	1-3/8"	1-13/32"	2-7/8"	3-1/2"	.70
7332	1"	1-1/2"	1-1/2"	1-13/32"	2-7/8"	3-1/2"	.82
7334	1-1/16"	1-1/2"	1-1/2"	1-17/32"	2-7/8"	3-1/2"	.90
7336	1-1/8"	19/32"	19/32"	1-13/32"	2-7/8"	3-1/2"	1.15
7338	1-3/16"	43/64"	43/64"	1-13/32"	2-7/8"	3-1/2"	1.18
7340	1-1/4"	1-3/4"	1-3/4"	1-13/32"	2-7/8"	3-1/2"	1.27
7342	1-5/16"	1-27/32"	1-27/32"	1-13/32"	2-7/8"	3-1/2"	1.36
7344	1-3/8"	1-7/8"	1-5/8"	1-13/32"	2-7/8"	3-1/2"	1.38
7346	1-7/16"	2"	1-5/8"	1-13/32"	2-7/8"	3-1/2"	1.61
7348	1-1/2"	2-1/16"	1-5/8"	1-13/32"	2-7/8"	3-1/2"	1.80

ANSI Spec.: B107.2



1/2" DRIVE DEEP LENGTH SOCKETS—8 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7312S	3/8"	3/4"	7/8"	11/32"	2-19/32"	3-1/4"	.41
7314S	7/16"	27/32"	15/16"	3/8"	2-19/32"	3-1/4"	.42
7316S	1/2"	15/16"	15/16"	7/16"	2-19/32"	3-1/4"	.40
7318S	9/16"	1-1/32"	1-1/32"	1/2"	2-19/32"	3-1/4"	.50
7320S	5/8"	1-1/8"	1-1/8"	1/2"	2-19/32"	3-1/4"	.58
7322S	11/16"	1-3/16"	1-3/16"	17/32"	2-19/32"	3-1/4"	.61
7324S	3/4"	1-5/16"	1-5/16"	9/16"	2-19/32"	3-1/4"	.78
7326S	13/16"	1-3/8"	1-3/8"	1-3/16"	2-19/32"	3-1/4"	.82
7328S	7/8"	1-1/2"	1-1/2"	1-7/16"	2-27/32"	3-1/2"	1.08
7330S	15/16"	1-39/64"	1-39/64"	3/4"	2-27/32"	3-1/2"	1.33
7332S	1"	1-11/16"	1-11/16"	13/16"	2-27/32"	3-1/2"	1.44

Fed'l Specs.: GGG-W-660A
ANSI Spec.: B107.2




1/2" DRIVE EXTENSIONS

Product ID No.	L	Weight lbs.
7180P	2"	.23
7182P	3"	.31
7181P	5"	.52
7184P	9"	.88
7183-00	10"	1.02

Fed'l Specs.: GGG-W-660A

Fed'l Specs.: GGG-W-660A

REFERENCE MEASUREMENT KEY

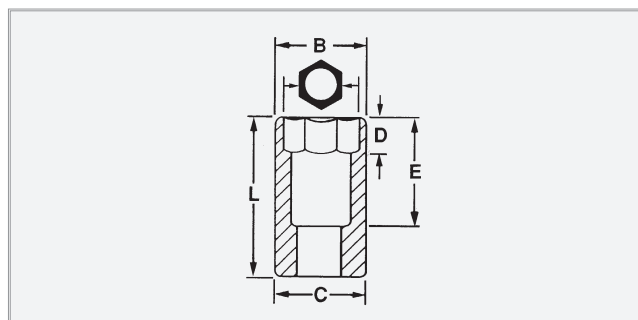



1/2" DRIVE LOCKING IMPACT EXTENSIONS

- Solid one-piece design prevents the locking components from becoming loose or disengaged.
- Patented locking feature locks sockets to the extension with exceptional force.
- Knurled shank provides a non-slip grip when hand-turning the extension.

Product ID No.	Description	Dimensions
7503	1/2" x 3" Extension	7/8" W x 3" L
7505	1/2" x 5" Extension	7/8" W x 5" L
7510	1/2" x 10" Extension	7/8" W x 10" L
7515	3-piece set	



1/2" DRIVE UNIVERSAL SOCKETS—6 POINT

- Patented "Pinless" design for greater safety and durability.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
7474P	7/16"	5/8"	1-9/64"	15/64"	21/32"	2-1/4"	.47
7475P	1/2"	47/64"	1-9/64"	1/4"	21/32"	2-21/32"	.49
7476P	9/16"	53/64"	1-9/64"	9/32"	21/32"	2-21/32"	.50
7477P	5/8"	59/64"	1-9/64"	5/16"	21/32"	2-21/32"	.50
7478P	11/16"	1-1/32"	1-9/64"	11/32"	1/2"	2-3/4"	.57
7479P	3/4"	1-1/8"	1-9/64"	3/8"	5/8"	2-7/8"	.62
7480P	13/16"	1-17/64"	1-9/64"	29/64"	11/16"	2-7/8"	.66



1/2" DRIVE UNIVERSAL JOINT

- Patented "Pinless" design for greater safety and durability.

Product ID No.	L	Weight lbs.
7470P	2-15/16"	.58

Fed'l Specs.: GGG-W-660A



1/2" DRIVE HEX BITS

Product ID No.	in.	in.	in.	Weight lbs.	
74411/4	1/4"	1-3/4"	3-1/4"	.24	54411/4RKA
74415/16	5/16"	1-3/4"	3-1/4"	.38	54415/16RKA
74413/8	3/8"	1-3/4"	3-1/4"	.38	54413/8RKA
74417/16	7/16"	1-3/4"	3-1/4"	.44	54417/16RKA
74411/2	1/2"	1-7/8"	3-5/8"	.46	54411/2RKA
74419/16	9/16"	1-7/8"	3-5/8"	.48	54419/16RKA
74415/8	5/8"	2"	4"	.83	54415/8RKA




1/2" DRIVE METRIC STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
7408M	8	14.6	23.7	7.0	21.4	38.1	.13
7409M	9	16.3	23.7	9.5	21.4	38.1	.13
7410M	10	17.1	23.8	9.5	21.4	38.1	.14
7411M	11	18.3	23.8	9.5	21.4	38.1	.15
7412M	12	20.2	23.8	10.3	21.4	38.1	.16
7413M	13	20.2	23.8	11.1	21.4	38.1	.17
7414M	14	22.2	23.7	11.9	21.4	38.1	.17
7415M	15	23.7	23.7	12.7	21.6	38.1	.17
7416M	16	25.4	25.4	13.5	21.6	38.1	.17
7417M	17	26.1	26.1	14.3	21.6	38.1	.21
7418M	18	28.4	28.4	20.3	21.6	38.1	.24
7419M	19	28.2	28.2	18.8	21.6	38.1	.25
7420M	20	29.3	29.3	17.4	24.6	41.2	.25
7421M	21	30.6	30.6	17.2	24.6	41.2	.27
7422M	22	32.5	32.5	17.2	24.6	41.2	.33
7423M	23	34.8	34.8	17.0	24.6	41.2	.43
7424M	24	34.5	34.5	17.0	24.6	41.2	.44
7425M	25	34.9	34.9	20.2	27.8	44.5	.44
7426M	26	38.1	38.1	26.2	34.0	50.8	.61
7427M	27	38.1	38.1	26.1	34.0	50.8	.68
7428M	28	41.3	41.3	26.0	34.0	50.8	.73
7429M	29	41.4	41.4	25.9	34.1	50.8	.77
7430M	30	38.6	38.6	20.0	27.6	50.8	.80
7432M	32	38.6	38.6	20.3	27.9	50.8	.80
7436M	36	51.2	51.2	30.3	34.1	50.8	1.12

REFERENCE MEASUREMENT KEY

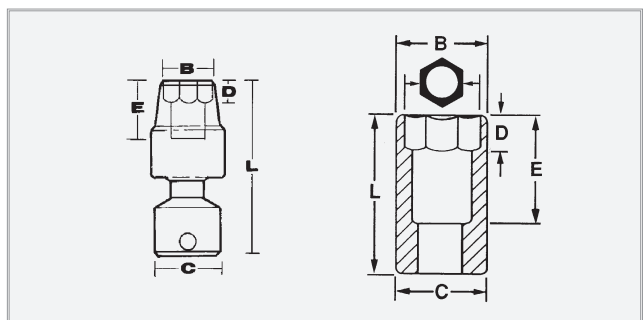



1/2" DRIVE METRIC STANDARD LENGTH SOCKETS—12 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
7410MT	10	15.5	22.7	6.4	16.7	38.1	.14
7411MT	11	16.8	23.7	7.1	16.7	38.1	.15
7412MT	12	17.5	23.7	7.8	16.7	38.1	.16
7413MT	13	18.5	23.7	8.7	16.7	38.1	.17
7414MT	14	20.1	23.7	9.5	16.7	38.1	.17
7415MT	15	21.5	23.7	11.1	16.7	38.1	.17
7416MT	16	22.4	23.7	11.1	16.7	38.1	.17
7417MT	17	23.7	23.7	11.1	16.7	38.1	.21
7418MT	18	25.4	25.4	11.1	16.7	38.1	.24
7419MT	19	26.2	26.2	21.4	16.7	38.1	.25
7420MT	20	28.7	27.0	21.4	16.7	38.1	.25
7421MT	21	30.2	28.7	21.4	16.7	38.1	.27
7424MT	24	35.6	33.3	21.4	16.7	38.1	.44
7430MT	30	42.9	41.3	26.2	34.1	50.8	.80
7432MT	32	45.2	41.3	26.2	34.1	50.8	.80



1/2" DRIVE ADAPTERS

Product ID No.	F	M	L	Weight lbs.
7650	3/8" F x 1/2" M		1-5/16"	.12
7651	1/2" F x 3/8" M		1-7/16"	.18
7652	1/2" F x 3/4" M		2-1/8"	.35
7653	3/4" F x 1/2" M		2-1/8"	.35
7655	5/8" F x 1/2" M		1-7/8"	.32

Fed'l Specs.: GGG-W-660A



1/2" DRIVE METRIC DEEP LENGTH THIN WALL SOCKETS—6 POINT




Product ID No.	mm	B	C	D	E	L	Weight lbs.
7313MHT	13	18.5	23.7	11.9	70.7	82.6	.340
7314MHT	14	20.6	23.8	11.9	65.9	82.6	.350
7315MHT	15	21.5	25.4	12.7	65.9	82.6	.363
7316MHT	16	22.4	25.4	13.5	65.9	82.6	.425
7317MHT	17	23.9	25.4	14.3	65.9	82.6	.440
7318MHT	18	25.4	25.4	15.9	65.9	82.6	.463
7319MHT	19	26.2	26.2	29.5	53.1	82.6	.500



1/2" DRIVE METRIC DEEP LENGTH SOCKETS—6 POINT




Product ID No.	mm	B	C	D	E	L	Weight lbs.
7308M	8	14.5	22.1	8.1	65.8	82.6	.29
7309M	9	15.2	22.1	9.4	65.8	82.6	.29
7310M	10	16.3	23.7	11.1	65.8	82.6	.30
7311M	11	18.0	23.7	11.1	65.8	82.6	.32
7312M	12	18.8	23.7	12.7	65.8	82.6	.34
7313M	13	20.0	23.7	12.7	65.8	82.6	.34
7314M	14	22.0	23.7	12.7	65.8	82.6	.35
7315M	15	23.7	25.3	14.6	65.8	82.6	.37
7316M	16	25.3	26.0	15.2	65.8	82.6	.43
7317M	17	26.0	27.0	15.9	65.8	82.6	.45
7318M	18	27.0	27.0	17.2	65.8	82.6	.47
7319M	19	28.2	28.2	29.5	65.8	82.6	.51
7320M	20	29.4	29.4	29.5	65.8	82.6	.52
7321M	21	30.6	30.6	35.9	65.8	82.6	.54
7322M	22	32.5	32.5	35.9	72.2	88.9	.74
7323M	23	33.0	33.0	35.9	72.2	88.9	.79
7324M	24	34.5	34.5	35.9	72.2	88.9	.70
7325M	25	36.4	36.4	35.9	72.2	88.9	.91
7326M	26	38.0	38.0	35.9	72.2	88.9	1.03
7327M	27	39.8	39.8	35.9	72.2	88.9	1.04
7328M	28	41.3	41.3	35.9	72.2	88.9	1.04
7329M	29	41.4	41.4	38.4	72.2	88.9	1.04
7330M	30	42.7	42.7	35.8	72.2	88.9	1.05
7332M	32	45.3	45.3	30.6	72.2	88.9	1.05
7336M	36	52.3	52.3	35.5	72.2	88.9	1.06



1/2" DRIVE METRIC HEX BITS

Product ID No.	mm	1-3/4"	3-1/4"	Weight lbs.	
7441-6M	6	1-3/4"	3-1/4"	103.0	5441-6MRKA
7441-8M	8	1-3/4"	3-1/4"	128.6	5441-8MRKA
7441-10M	10	1-3/4"	3-1/4"	137.4	5441-10MRKA
7441-12M	12	1-3/4"	3-1/4"	158.9	5441-12MRKA
7441-14M	14	1-3/4"	3-5/8"	217.9	5441-14MRKA
7441-17M	17	2"	4"	240.6	5441-17MRKA

REFERENCE MEASUREMENT KEY

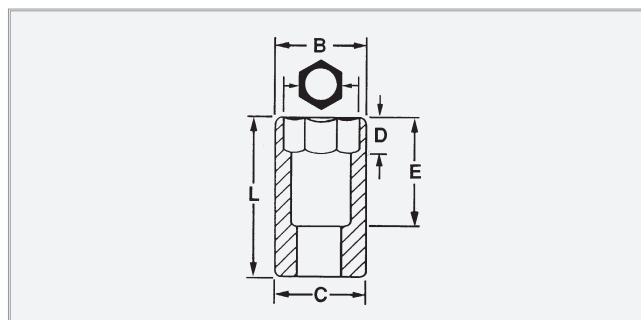



3/4" DRIVE STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
07509†*	9/16"	1"	1-5/8"	23/64"	15/16"	1-7/8"	.66
07510†*	5/8"	1-3/32"	1-5/8"	25/64"	15/16"	1-7/8"	.67
07511†*	11/16"	1-5/32"	1-5/8"	7/16"	1"	1-15/16"	.67
07512†*	3/4"	1-15/64"	1-5/8"	15/32"	1"	1-15/16"	.69
07513†*	13/16"	1-5/16"	1-5/8"	1/2"	1"	1-15/16"	.70
07514†*	7/8"	1-1/2"	1-5/8"	35/64"	1-1/16"	2"	.75
07515†*	15/16"	1-5/8"	1-5/8"	37/64"	1-1/16"	2"	.75
07516†*	1"	1-5/8"	1-5/8"	5/8"	1-1/8"	2-1/16"	.76
07517†*	1-1/16"	1-5/8"	1-5/8"	21/32"	1-1/8"	2-1/16"	.78
07518†*	1-1/8"	1-3/4"	1-3/4"	45/64"	1-1/4"	2-3/16"	.94
07519*	1-3/16"	1-7/8"	1-3/4"	47/64"	1-1/4"	2-3/16"	1.04
07520†*	1-1/4"	2"	1-3/4"	3/4"	1-1/4"	2-3/16"	1.15
07521†*	1-5/16"	2-1/8"	1-3/4"	27/32"	1-1/4"	2-3/16"	1.20
07522†*	1-3/8"	2-1/8"	1-3/4"	7/8"	1-5/16"	2-1/4"	1.23
07523†*	1-7/16"	2-1/4"	1-3/4"	7/8"	1-3/8"	2-5/16"	1.41
07524†*	1-1/2"	2-3/8"	1-3/4"	1"	1-7/16"	2-3/8"	1.56
07525†*	1-9/16"	2-3/8"	1-3/4"	1"	1-1/2"	2-7/16"	1.66
07526†*	1-5/8"	2-3/8"	1-3/4"	1"	1-1/2"	2-7/16"	1.75
07527	1-11/16"	2-39/64"	1-3/4"	1-1/8"	1-11/16"	2-5/8"	1.84
07528	1-3/4"	2-39/64"	1-3/4"	1-1/8"	1-11/16"	2-5/8"	1.93
07529	1-13/16"	2-3/4"	1-3/4"	1-1/8"	1-11/16"	2-5/8"	2.01
07530	1-7/8"	2-3/4"	1-3/4"	1-1/4"	1-7/8"	2-13/16"	2.09
07531	1-15/16"	2-7/8"	1-3/4"	1-1/4"	1-7/8"	2-13/16"	2.18
07532	2"	3"	1-3/4"	1-1/4"	1-7/8"	2-13/16"	2.22
07533	2-1/16"	3"	1-3/4"	1-3/8"	2-5/32"	3-3/32"	2.28
07534	2-1/8"	3-1/8"	1-3/4"	1-3/8"	2-5/32"	3-3/32"	2.35
07535	2-3/16"	31/4"	1-3/4"	1-3/8"	2-3/16"	3-1/8"	2.69
07536	2-1/4"	35/16"	1-3/4"	1-1/2"	2-5/16"	3-1/4"	2.73
07538	2-3/8"	31/2"	1-3/4"	1-1/2"	2-7/16"	3-3/8"	3.45

†Fed'l Specs.: GGG-W-660A

*ANSI Spec.: B107.1



3/4" DRIVE LENGTH SOCKETS—8 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
07513S*	13/16"	1-5/8"	1-5/8"	23/32"	1-1/32"	2"	.76
07514S	7/8"	1-3/4"	1-3/4"	31/32"	1-1/32"	2"	.92
07515S*	15/16"	1-13/16"	1-3/4"	1-1/64"	1-3/32"	2-1/16"	.98
07516S	1"	2"	1-3/4"	1-1/16"	1-5/32"	2-1/8"	1.20
07517S	1-1/16"	2-1/8"	1-3/4"	1-7/64"	1-7/32"	2-3/16"	1.38
07518S	1-1/8"	2-1/4"	1-3/4"	1-5/32"	1-15/64"	2-1/4"	1.41
07519S	1-3/16"	2-3/8"	1-3/4"	1-7/32"	1-11/32"	2-5/16"	1.66
07520S	1-1/4"	2-3/8"	1-3/4"	1-17/64"	1-13/32"	2-3/8"	1.67
07521S	1-5/16"	2-1/2"	1-3/4"	1-1/4"	1-13/32"	2-3/8"	1.81

*For Budd Wheels

Fed'l Specs.: GGG-W-660A

ANSI Spec.: B107.




3/4" DRIVE STANDARD LENGTH SOCKETS—12 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
07509T*	9/16"	1"	1-5/8"	23/64"	17/32"	1-7/8"	.66
07510T*	5/8"	1-3/32"	1-5/8"	25/64"	9/16"	1-7/8"	.67
07511T*	11/16"	1-5/32"	1-5/8"	7/16"	5/8"	1-15/16"	.67
07512T*	3/4"	1-1/4"	1-5/8"	15/32"	11/16"	1-15/16"	.69
07513T*	13/16"	1-5/16"	1-5/8"	1/2"	3/4"	1-15/16"	.70
07514T*	7/8"	1-1/2"	1-5/8"	9/16"	13/16"	2"	.75
07515T*	15/16"	1-5/8"	1-5/8"	37/64"	7/8"	2"	.75
07516T*	1"	1-5/8"	1-5/8"	5/8"	15/16"	2"	.76
07517T*	1-1/16"	1-5/8"	1-5/8"	21/32"	1"	2-1/16"	.78
07518T*	1-1/8"	1-3/4"	1-3/4"	29/32"	29/32"	2-3/16"	.94
07519T*	1-3/16"	1-7/8"	1-3/4"	63/64"	1-3/32"	2-3/16"	1.04
07520T*	1-1/4"	2"	1-3/4"	1"	1-1/8"	2-3/16"	1.15
07521T*	1-5/16"	2-1/8"	1-3/4"	17/64"	1-3/32"	2-3/16"	1.20
07522T*	1-3/8"	2-1/8"	1-3/4"	1-1/8"	1-1/8"	2-1/4"	1.23
07523T*	1-7/16"	2-1/4"	1-3/4"	1-1/8"	1-1/8"	2-5/16"	1.41
07524T*	1-1/2"	2-3/8"	1-3/4"	1-3/16"	1-3/16"	2-3/8"	1.56
07525T*	1-9/16"	2-3/8"	1-3/4"	1-1/4"	1-1/4"	2-7/16"	1.66
07526T*	1-5/8"	2-3/8"	1-3/4"	11/4"	1-1/4"	2-7/16"	1.75
07527T	1-11/16"	2-39/64"	1-3/4"	1-13/32"	1-13/32"	2-5/8"	1.84
07528T	1-3/4"	2-39/64"	1-3/4"	1-13/32"	1-13/32"	2-5/8"	1.93
07529T	1-13/16"	2-3/4"	1-3/4"	1-13/32"	1-13/32"	2-5/8"	2.01
07530T	1-7/8"	2-3/4"	1-3/4"	1-1/2"	1-1/2"	2-13/16"	2.09
07531T	1-15/16"	2-7/8"	1-3/4"	1-1/2"	1-1/2"	2-13/16"	2.18
07532T	2"	3"	1-3/4"	1-1/2"	1-1/2"	2-13/16"	2.22
07533T	2-1/16"	3"	1-3/4"	1-9/16"	1-9/16"	3-3/32"	2.28
07534T	2-1/8"	3-1/8"	1-3/4"	1-9/16"	1-9/16"	3-3/32"	2.35
07535T	2-3/16"	3-1/4"	1-3/4"	1-9/16"	1-9/16"	3-1/8"	2.69
07536T	2-1/4"	3-1/4"	1-3/4"	1-21/32"	1-21/32"	3-1/4"	2.73
07538T	2-3/8"	3-1/2"	1-3/4"	1-3/4"	1-3/4"	3-3/8"	3.45

*ANSI Spec.: B107.1

REFERENCE MEASUREMENT KEY

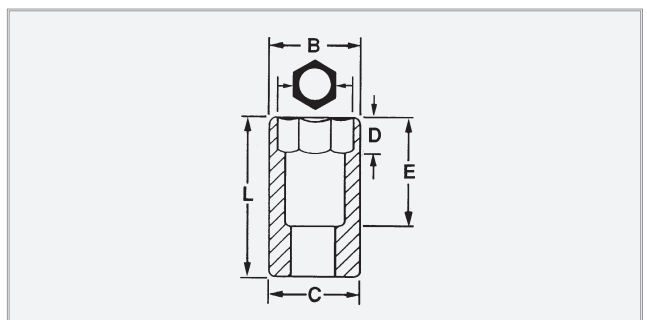



3/4" DRIVE STANDARD LENGTH SOCKETS—4 POINT

Product ID No.	in.	B	C	D	E	L	Weight lbs.
07510SS	5/8"	1-1/4"	1-5/8"	25/64"	5/16"	1-7/8"	.68
07511SS	11/16"	1-11/32"	1-5/8"	7/16"	15/16"	1-7/8"	.69
07513SS	13/16"	1-5/8"	1-5/8"	33/64"	1-1/16"	2"	.79

Fed'l Specs.: GGG-W-660A
ANSI Spec.: B107.2



3/4" DRIVE DEEP LENGTH THIN WALL SOCKETS—6 POINT

- Sockets have thinner walls and longer lengths than standard impact sockets.
- Ideal for tire service applications.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
07512-LT	3/4"	1-3/8"	1-3/8"	39/64"	3-1/16"	4"	.70
07513-LT	13/16"	1-3/8"	1-3/8"	21/32"	3-1/16"	4"	.75
07514-LT	7/8"	1-3/8"	1-3/8"	23/32"	3-1/16"	4"	.83
07515-LT	15/16"	1-3/8"	1-3/8"	49/64"	3-1/16"	4"	.89
07516-LT	1"	1-7/16"	1-7/16"	53/64"	3-1/16"	4"	.94
07517-LT†	1-1/16"	1-1/2"	1-1/2"	7/8"	3-1/16"	4"	1.01
07518-LT†	1-1/8"	1-5/8"	1-5/8"	59/64"	3-1/16"	4"	1.27
07519-LT	1-3/16"	1-11/16"	1-11/16"	31/32"	3-1/16"	4"	1.34
07520-LT†	1-1/4"	1-3/4"	1-3/4"	1"	3-1/16"	4"	1.43
07521-LT†	1-5/16"	1-7/8"	1-3/4"	1-1/8"	2-5/16"	3-1/4"	1.51
07522-LT†	1-3/8"	1-15/16"	1-3/4"	1-1/8"	2-5/16"	3-1/4"	1.59
07523-LT†	1-7/16"	2"	1-3/4"	1-1/8"	2-9/16"	3-1/2"	1.66
07524-LT	1-1/2"	2-1/8"	1-3/4"	1-1/4"	2-9/16"	3-1/2"	1.86

*1-1/2" conventional hex F 13/16" square.

†Fed'l Specs.: GGG-W-660A



3/4" DRIVE DEEP LENGTH THIN WALL SOCKETS—6 POINT

- Sockets have thinner walls and longer lengths than standard impact sockets.

Product ID No.	in.	B	C	D	E	L	Weight lbs.
07524-LS	1-1/2"	2-1/4"	1-3/4"	1-3/32"	1-1/16"	4"	2.96



3/4" DRIVE DEEP LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
07509L*	9/16"	1"	1-5/8"	15/32"	2-5/16"	3-1/4"	1.23
07510L*	5/8"	1-3/32"	1-5/8"	33/64"	2-5/16"	3-1/4"	1.25
07511L*	11/16"	1-5/32"	1-5/8"	9/16"	2-5/16"	3-1/4"	1.26
07512L*	3/4"	1-1/4"	1-5/8"	39/64"	2-5/16"	3-1/4"	1.26
07513L*	13/16"	1-5/16"	1-5/8"	43/64"	2-5/16"	3-1/4"	1.26
07514L*	7/8"	1-1/2"	1-5/8"	23/32"	2-5/16"	3-1/4"	1.31
07515L*	15/16"	1-5/8"	1-5/8"	25/32"	2-5/16"	3-1/4"	1.28
07516L*	1"	1-5/8"	1-5/8"	53/64"	2-5/16"	3-1/4"	1.20
07517L*	1-1/16"	1-5/8"	1-5/8"	7/8"	2-5/16"	3-1/4"	1.14
07518L*	1-1/8"	1-3/4"	1-3/4"	59/64"	2-5/16"	3-1/4"	1.51
07519L	1-3/16"	1-7/8"	1-3/4"	31/32"	2-5/16"	3-1/4"	1.53
07520L*	1-1/4"	2"	1-3/4"	1"	2-5/16"	3-1/4"	1.69
07521L*	1-5/16"	2-1/8"	1-3/4"	1"	2-5/16"	3-1/4"	1.79
07522L*	1-3/8"	2-1/8"	1-3/4"	1"	2-5/16"	3-1/4"	1.81
07523L*	1-7/16"	2-1/4"	1-3/4"	1-1/16"	2-7/16"	3-1/2"	2.12
07524L*	1-1/2"	2-3/8"	1-3/4"	1-1/16"	2-7/16"	3-1/2"	2.36
07525L*	1-9/16"	2-3/8"	1-3/4"	2"	2-7/8"	3-13/16"	2.45
07526L*	1-5/8"	2-3/8"	1-3/4"	2-1/4"	2-7/8"	3-13/16"	2.58
07527L	1-11/16"	2-39/64"	1-3/4"	2-1/4"	2-15/16"	3-7/8"	2.66
07528L	1-3/4"	2-39/64"	1-3/4"	2-1/4"	2-15/16"	3-7/8"	2.74
07529L	1-13/16"	2-3/4"	1-3/4"	2-1/4"	2-15/16"	3-7/8"	2.87
07530L	1-7/8"	2-3/4"	1-3/4"	2-3/8"	3-1/8"	4-1/16"	3.09
07532L	2"	3"	1-3/4"	2-5/8"	2-1/8"	4-1/16"	3.18

*Fed'l Specs.: GGG-W-660A

*ANSI Specs.: B107.2




3/4" DRIVE DEEP LENGTH SOCKET—4 POINT


Product ID No.	in.	B	C	D	E	L	Weight lbs.
07513SL	13/16"	1-5/8"	1-5/8"	43/64"	3-1/16"	4"	1.67

Fed'l Specs.: GGG-W-660A

ANSI Spec.: B107.2

REFERENCE MEASUREMENT KEY

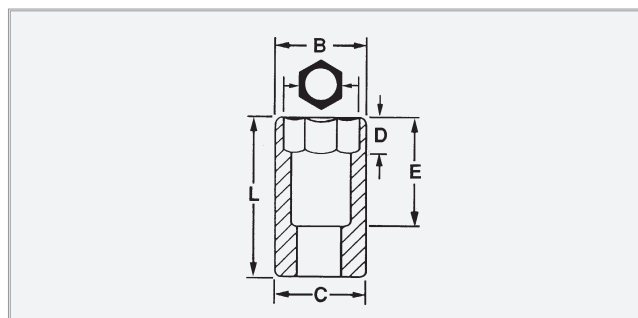

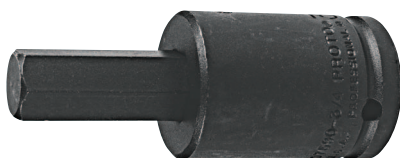


3/4" DRIVE HEX BITS

Product ID No.	in.			Weight lbs.	
07590 9/16	9/16"	2-21/64"	3-3/4"	1.03	07590916RK
07590 5/8	5/8"	2-3/8"	3-27/32"	1.10	0759058RK
07590 3/4	3/4"	2-1/2"	4-3/8"	1.32	0759034RK
07590 7/8	7/8"	2-9/16"	4-3/4"	1.43	0759078RK
07590 -1	1"	2-11/16"	5-13/64"	1.45	—



3/4" DRIVE UNIVERSAL JOINT

Product ID No.	L	Weight lbs.
07570	4-3/32"	1.57



3/4" DRIVE BUDD WHEEL DEEP LENGTH IMPACT SOCKET—DOUBLE OPENING

Product ID No.	in.	in.	Drive Size	B	C	L	Weight lbs.
07524LS	1-1/2"	13/16"	3/4"	2-1/4"	15/8"	4"	2.96



3/4" DRIVE EXTENSIONS

Product ID No.	L	Weight lbs.	
07565	5"	1.60	Fed'l Specs.: GGG-W-660A
07567	7"	2.06	Fed'l Specs.: GGG-W-660A
07568	10"	2.71	
07569	13"	3.35	Fed'l Specs.: GGG-W-660A



3/4" DRIVE ADAPTERS

Product ID No.	F	M	L	Weight lbs.	
07655	3/4"F x 1"M		153/64"	.88	
07656	1"F x 3/4"M		131/32"	1.41	Fed'l Specs.: GGG-W-660A
7656	5/8"F x 3/4"M		1"	.41	




3/4" DRIVE METRIC STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
07517M	17	29.2	41.3	10.9	25.2	49.0	.69
07519M	19	30.7	41.3	11.9	25.2	49.0	.64
07520M	20	33.1	41.3	14.3	25.2	49.0	.64
07521M	21	34.7	41.3	15.9	23.6	49.0	.64
07522M	22	36.3	41.3	17.4	27.0	50.8	.66
07523M	23	41.3	41.3	17.4	27.0	50.8	.66
07524M	24	41.3	41.3	15.0	27.0	50.8	.71
07525M	25	41.3	41.3	17.4	27.0	50.8	.70
07526M	26	41.3	41.3	19.1	28.5	52.3	.70
07527M	27	41.3	41.3	20.6	28.5	52.3	.71
07528M	28	41.3	41.3	17.9	28.5	52.3	.93
07530M	30	47.6	44.4	27.1	27.1	55.4	1.03
07531M	31	47.6	44.4	22.2	28.6	55.4	1.06
07532M	32	50.8	44.4	22.2	28.8	55.4	1.08
07533M	33	50.8	44.4	22.2	30.2	55.4	1.1
07534M	34	54.0	44.4	23.8	30.2	57.2	1.27
07535M	35	54.0	44.4	23.8	33.3	57.2	1.26
07536M	36	57.2	44.4	23.8	32.4	58.7	1.39
07538M	38	60.3	44.4	25.4	33.6	60.2	1.57
07540M	40	63.5	44.4	26.2	32.3	63.5	1.7
07541M	41	63.5	44.4	27.0	37.6	66.5	1.86
07542M	42	63.5	44.4	28.6	43.2	69.9	1.92
07543M	43	65.1	44.4	28.6	43.2	69.9	2.06
07546M	46	69.9	44.4	31.8	43.2	72.9	2.39
07550M	50	74.7	44.4	31.8	44.9	79.2	3.16

REFERENCE MEASUREMENT KEY

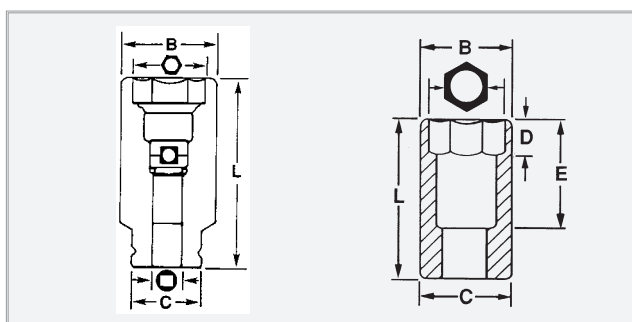



3/4" DRIVE "O" RING FOR IMPACT SOCKETS AND ATTACHMENTS

Product ID No.	Drive Size	Use With
07500R	3/4"	All 3/4" drive impact sockets and attachments



3/4" DRIVE RETAINING PIN FOR IMPACT SOCKETS AND ATTACHMENTS

Product ID No.	Drive Size	Use With
07500P	3/4"	All 3/4" drive impact sockets and attachments



3/4" DRIVE RET RING® ONE-PIECE SOCKET RETAINERS

- The Ret Ring® is designed to hold Impact Socket onto an Impact Wrench when it is rotating at high speeds of up to 5000 RPM.
- The steel insert is designed to provide additional security of socket retention to the Impact Wrench.
- Standard Package of 10, not sold individually.

Product ID No.	Description	Diameter Hub	Groove	Use With
07500-0	Ret Ring	1.63"	1.50"	07509 thru 07517
				07509T thru 07517T
				07517M thru 07527M
				07509L thru 07517L
				07519ML thru 07527ML
				07512S thru 07513S
				07510SS thru 07513SS
				07512-LT thru 07519-LT
				07513SL
				075909/16, 075905/8
07500-1	Ret Ring	1.75"	1.625"	07655, 7656
				07518 thru 07538
				07518T thru 07538T
				07528M thru 07550M
				07518L thru 07532L
				07530ML thru 07543ML
				07514S thru 07521S
				07520-LT thru 07524-LT
				07524LS
				075903/4, 075907/8, 07590-1



3/4" DRIVE METRIC DEEP LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
07519ML	19	30.9	41.3	15.7	57.1	82.6	.64
07521ML	21	34.9	41.3	20.4	57.1	82.6	.64
07522ML	22	36.5	41.3	20.7	57.1	82.6	.66
07523ML	23	41.3	41.3	19.1	57.1	82.6	.69
07524ML	24	41.3	41.3	20.7	57.1	82.6	.68
07526ML	26	41.3	41.3	21.5	57.1	82.6	.70
07527ML	27	41.3	41.3	22.2	57.1	82.6	.71
07530ML	30	47.6	44.4	24.8	58.0	82.6	1.03
07532ML	32	50.8	44.4	25.4	58.0	82.6	1.27
07533ML	33	50.8	44.4	25.4	58.0	82.6	1.27
07535ML	35	54.0	44.4	25.4	58.0	82.6	1.39
07536ML	36	57.2	44.4	25.4	58.0	82.6	1.39
07538ML	38	60.3	44.4	27.0	62.5	88.9	1.58
07541ML	41	63.5	44.4	27.0	62.5	88.9	1.86
07543ML	43	65.1	44.4	28.6	62.5	88.9	2.06




1" DRIVE STANDARD LENGTH SOCKETS—4 POINT / 8 POINT

Product ID No.	in.	B	C	D	E	L	Weight Lbs.
10012SS	3/4"	1-7/8"	2-1/8"	5/8"	1-3/8"	2-1/2"	1.70
10013SS*	13/16"	1-15/16"	2-1/8"	5/8"	1-3/8"	2-1/2"	1.76
10014SS	7/8"	2"	2-1/8"	5/8"	1-3/8"	2-1/2"	1.76
10015SS*	15/16"	2-1/16"	2-1/8"	19/32"	1-3/8"	2-1/2"	1.74
10016SS	1"	2-1/8"	2-1/8"	11/16"	1-3/8"	2-1/2"	1.74

*For Budd Wheels

REFERENCE MEASUREMENT KEY

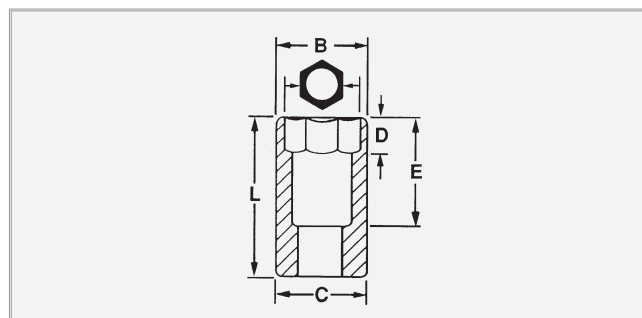



1" DRIVE STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	in.	B	C	D	E	L	Weight lbs.
10012†*	3/4"	1-7/16"	2-1/8"	19/32"	1-5/16"	2-7/16"	1.48
10013†*	13/16"	1-1/2"	2-1/8"	5/8"	1-3/8"	2-1/2"	1.50
10014†*	7/8"	1-17/32"	2-1/8"	21/32"	1-3/8"	2-1/2"	1.50
10015†	15/16"	1-39/64"	2-1/8"	19/32"	1-3/8"	2-1/2"	1.62
10016†*	1"	1-3/4"	2-1/8"	3/4"	1-3/8"	2-1/2"	1.62
10017†*	1-1/16"	1-3/4"	2-1/8"	7/8"	1-1/2"	2-5/8"	1.72
10018†*	1-1/8"	1-13/16"	2-1/8"	7/8"	1-1/2"	2-5/8"	1.70
10019†	1-3/16"	1-7/8"	2-1/8"	7/8"	1-1/2"	2-5/8"	1.66
10020†*	1-1/4"	2-1/8"	2-1/8"	15/16"	1-1/2"	2-5/8"	1.69
10021†*	1-5/16"	2-1/8"	2-1/8"	15/16"	1-5/8"	2-3/4"	1.75
10022†*	1-3/8"	2-1/8"	2-1/8"	1-1/32"	1-5/8"	2-3/4"	1.70
10023†*	1-7/16"	2-1/8"	2-1/8"	1-1/32"	1-5/16"	2-7/16"	1.55
10024†*	1-1/2"	2-3/8"	2-3/8"	1-1/4"	1-1/2"	2-5/8"	2.04
10025†	1-9/16"	2-3/8"	2-3/8"	1-1/4"	1-1/2"	2-5/8"	1.98
10026†*	1-5/8"	2-15/32"	2-3/8"	1-1/4"	1-1/2"	2-5/8"	1.97
10027†*	1-11/16"	2-39/64"	2-3/8"	1-13/32"	1-11/16"	2-13/16"	2.37
10028†	1-3/4"	2-11/16"	2-3/8"	1-1/8"	1-11/16"	2-13/16"	2.37
10029†*	1-13/16"	2-51/64"	2-3/8"	1-1/8"	1-1/16"	2-13/16"	2.55
10030†*	1-7/8"	2-51/64"	2-3/8"	1-1/4"	1-7/8"	3"	2.63
10031	1-15/16"	2-7/8"	2-3/8"	1-1/4"	1-7/8"	3"	2.82
10032†*	2"	3"	2-3/8"	1-1/4"	1-7/8"	3"	3.12
10033†*	2-1/16"	3"	2-3/8"	1-9/16"	1-31/32"	3-3/32"	3.06
10034	2-1/8"	3-1/8"	2-3/8"	1-9/16"	1-31/32"	3-3/32"	3.25
10035†*	2-3/16"	3-1/4"	2-3/8"	1-9/16"	2"	3-1/8"	3.59
10036†*	2-1/4"	3-5/16"	2-3/8"	1-21/32"	2-1/8"	3-1/4"	3.63
10037†	2-5/16"	3-7/16"	2-3/8"	1-21/32"	2-13/16"	3-21/64"	4.23
10038†*	2-3/8"	3-1/2"	2-3/8"	1-3/4"	2-1/4"	3-3/8"	4.35
10039†*	2-7/16"	3-1/2"	2-3/8"	1-3/4"	2-1/4"	3-25/64"	4.05
10040†	2-1/2"	3-5/8"	2-3/8"	1-13/16"	2-17/64"	3-1/2"	4.55
10041†*	2-9/16"	3-47/64"	2-3/8"	1-13/16"	2-17/64"	3-1/2"	4.93
10042†*	2-5/8"	3-3/4"	2-3/8"	1-15/16"	2-1/2"	3-5/8"	4.93
10043†	2-11/16"	3-7/8"	2-3/8"	1-15/16"	2-1/2"	3-21/32"	5.10
10044†*	2-3/4"	3-7/8"	2-3/8"	2"	2-5/8"	3-3/4"	5.43
10045†*	2-13/16"	4"	2-3/8"	2-3/64"	2-11/16"	3-13/16"	5.50
10046†	2-7/8"	4-1/16"	2-3/8"	2-5/64"	2-3/4"	3-7/8"	5.40
10047†*	2-15/16"	4-1/8"	2-3/8"	2-1/16"	2-3/4"	3-7/8"	5.40
10048†*	3"	4-1/4"	2-3/8"	2-3/16"	2-7/8"	4"	6.59
10050†*	3-1/8"	4-3/8"	2-3/8"	2-3/16"	2-15/16"	4-1/16"	6.93
10052†	3-1/4"	4-1/2"	2-3/8"	2-15/32"	3-1/4"	4-3/8"	7.43
10054†*	3-3/8"	4-9/16"	2-3/8"	2-15/32"	3-5/16"	4-7/16"	7.58
10056†*	3-1/2"	4-3/4"	2-3/8"	2-1/2"	3-3/8"	4-1/2"	8.06
10058†	3-5/8"	4-7/8"	2-3/8"	2-35/64"	2-5/8"	4-3/4"	8.95
10062†	3-7/8"	5-1/16"	2-3/8"	2-31/32"	3-7/8"	5"	9.02
10064	4"	5-3/4"	2-3/8"	2-1/2"	4-3/8"	5-1/2"	15.06
10066	4-1/8"	6"	2-3/8"	2-3/4"	4-5/8"	5-1/2"	17.08
10068	4-1/4"	6"	2-3/8"	2-3/4"	4-5/8"	5-1/2"	15.96
10072	4-1/2"	6-1/4"	2-3/8"	3"	4-7/8"	6"	17.38

*Fed'l Specs.: GGG-W-660A

†ANSI Spec.: B107.2



1" DRIVE DEEP LENGTH SOCKETS—6 POINT




Product ID No.	in.	B	C	D	E	L	Weight lbs.
10014L††	7/8"	1-35/64"	2-1/8"	21/32"	2-5/8"	3-3/4"	2.45
10015L*	15/16"	1-39/64"	2-1/8"	49/64"	2-5/8"	3-3/4"	2.64
10016L†*	1"	1-3/4"	2-1/8"	3/4"	2-5/8"	3-3/4"	2.66
10017L†*	1-1/16"	1-3/4"	2-1/8"	7/8"	2-5/8"	3-3/4"	2.54
10018L†*	1-1/8"	1-13/16"	2-1/8"	7/8"	2-5/8"	3-3/4"	2.53
10019L	1-3/16"	1-7/8"	2-1/8"	7/8"	2-5/8"	3-3/4"	2.32
10020L†	1-1/4"	2-1/8"	2-1/8"	15/16"	2-5/8"	3-3/4"	2.55
10021L†*	1-5/16"	2-1/8"	2-1/8"	1"	2-5/8"	3-3/4"	2.45
10022L†*	1-3/8"	2-1/8"	2-1/8"	1-1/32"	2-5/8"	3-3/4"	2.38
10023L†*	1-7/16"	2-1/8"	2-1/8"	1-49/64"	2-5/8"	4"	2.52
10024L†*	1-1/2"	2-3/8"	2-3/8"	1-49/64"	2-7/8"	4"	2.80
10025L†	1-9/16"	2-3/8"	2-3/8"	2"	2-7/8"	4"	2.89
10026L†*	1-5/8"	2-3/8"	2-3/8"	2-1/4"	2-7/8"	4"	2.73
10028L†	1-3/4"	2-39/64"	2-3/8"	2-1/4"	2-15/16"	4-1/16"	3.31
10029L†*	1-13/16"	2-3/4"	2-3/8"	2-1/4"	2-15/16"	4-1/16"	3.65
10030L†*	1-7/8"	2-3/4"	2-3/8"	2-3/8"	3-1/8"	4-1/4"	3.74
10031L*	1-15/16"	2-7/8"	2-3/8"	2-3/8"	3-1/8"	4-1/4"	4.05
10032L	2"	3"	2-3/8"	2-3/8"	3-1/8"	4-1/4"	4.31
10034L†	2-1/8"	3-1/8"	2-3/8"	2-19/32"	3-3/8"	4-1/2"	4.78
10035L†*	2-3/16"	3-1/4"	2-3/8"	2-9/16"	3-3/8"	4-1/2"	5.19
10036L†*	2-1/4"	3-1/4"	2-3/8"	2-17/32"	3-3/8"	4-1/2"	4.98
10037L†	2-5/16"	3-1/2"	2-3/8"	2-17/32"	3-5/8"	4-3/4"	5.92
10038L†*	2-3/8"	3-1/2"	2-3/8"	2-3/4"	3-5/8"	4-3/4"	8.06
10041L†*	2-9/16"	3-5/8"	2-3/8"	3-1/8"	3-5/8"	5"	6.33
10044L†*	2-3/4"	3-7/8"	2-3/8"	3-1/16"	3-5/8"	5"	7.10

*Fed'l Specs.: GGG-W-660A

†ANSI Spec.: B107.2

‡Conventional hex

REFERENCE MEASUREMENT KEY

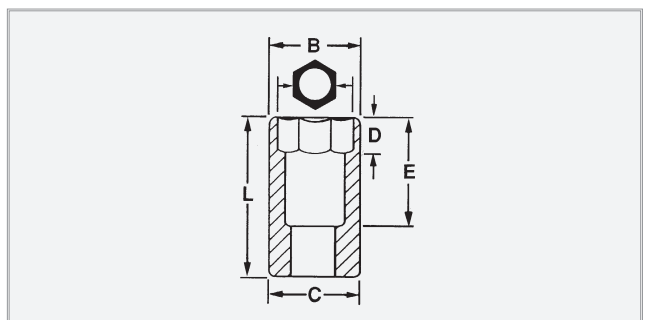

WARNING: WORK SAFELY WITH TOOLS WEAR SAFETY GOGGLES.

Toll Free Customer Service Number: 1-800-800-TOOL
Customer Service FAX Number: 1-770-385-3708



1" DRIVE EXTENSIONS

Product ID No.	L	Weight lbs.
10607	7-3/8"	3.64
10608	10"	4.59
10609	13"	5.94

Fed'l Specs.: GGG-W-660A



1" DRIVE BUDD WHEEL DEEP LENGTH IMPACT SOCKET—DOUBLE OPENING

Product ID No.	in.	in.	Drive Size	B	C	L	Weight lbs.
10024LS	1-1/2"	13/16"	1"	2-3/8"	2-3/8"	4"	3.80



1" DRIVE UNIVERSAL JOINT

Product ID No.	L	Weight lbs.
10670	5-3/8"	3.98



1" DRIVE ADAPTERS

Product ID No.	F	M	L	Weight lbs.
07656	1" F x 3/4" M		2-7/8"	1.41
07655	1" F x 1-1/2" M		3-1/2"	2.55

Fed'l Specs.: GGG-W-660A



1" DRIVE ADAPTER—MALE SPLINE

Product ID No.	F	M	L	Weight lbs.
10005	1" SQ. F x #5 SPL. M		4-1/2"	2.58




1" DRIVE RET RING® ONE-PIECE SOCKET RETAINERS

- The Ret Ring® is designed to hold Impact Socket onto an Impact Wrench when it is rotating at high speeds of up to 5,000 RPM.
- The steel insert is designed to provide additional security of socket retention to the Impact Wrench.
- Standard Package of 10, not sold individually.

Product ID No.	Description	Diameter Hub	Diameter Groove	Use With
10000-1	Ret Ring	2.13"	1.937"	10012 thru 10023
				10019M thru 10036M
				10012SS thru 10017SS
				10013L thru 10023L
				10018S
10000-2	Ret Ring	2.38"	2.19"	10017-LT, 10020-LT
				10607, 10608, 10609, 07656
				10024 thru 10072
				10041M thru 10065M,
				10024L thru 10044L, 10024LS, 10670, 10004, 10005
10000-3	Ret Ring	—	1.75"	For use on Williams Impact Sockets
10000-4	Ret Ring	—	2.50"	For use on Apex Impact Sockets
12500-1	Ret Ring	—	2.63"	For use on Apex and some Imported Impact Sockets

REFERENCE MEASUREMENT KEY

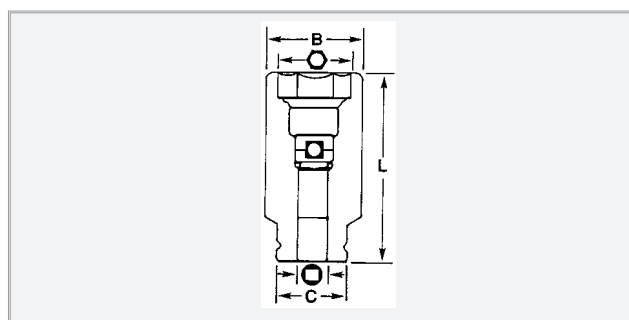



1" DRIVE "O" RINGS FOR IMPACT SOCKETS AND ATTACHMENTS

Product ID No.	Drive Size	Use With
10000R1	1"	10012 thru 10023
		10019M thru 10036M
		10012SS thru 1001SS
		10013L thru 10023L
		10018S, 10017-LT,
		10020-LT, 10607,
		10608, 10609
10000R2	1"	10024 thru 10072
		10041M thru 10065M
		10024L thru 10044L
		10024LS, 10670
		10004, 10005



1" DRIVE RETAINING PINS FOR IMPACT SOCKETS AND ATTACHMENTS

Product ID No.	Drive Size	Use With
10000P1	1"	10012 thru 10023
		10019M thru 10036M
		10012SS thru 1001SS
		10013L thru 10023L
		10018S, 10017-LT,
		10020-LT, 10607,
		10608, 10609
10000P2	1"	10024 thru 10072
		10041M thru 10065M
		10024L thru 10044L
		10024LS, 10670
		10004, 10005




1" DRIVE **METRIC** STANDARD LENGTH SOCKETS—6 POINT



Product ID No.	mm	B	C	D	E	L	Weight lbs.
10030M	30	47.6	53.9	22.3	30.5	66.0	1.65
10032M	32	53.9	53.9	23.8	30.5	66.0	1.68
10033M	33	53.9	53.9	25.4	31.8	69.9	1.75
10036M	36	57.2	53.9	30.4	31.8	61.9	1.87
10041M	41	63.3	61.3	31.8	31.8	71.6	1.95
10046M	46	70.5	61.3	35.6	42.8	71.6	2.61
10050M	50	76.2	61.3	38.1	47.6	76.2	3.35
10055M	55	82.5	61.3	39.6	50.7	79.2	3.62
10060M	60	88.9	61.3	44.5	57.1	85.8	4.58
10065M	65	95.2	61.3	46.0	57.1	88.9	4.83

REFERENCE MEASUREMENT KEY

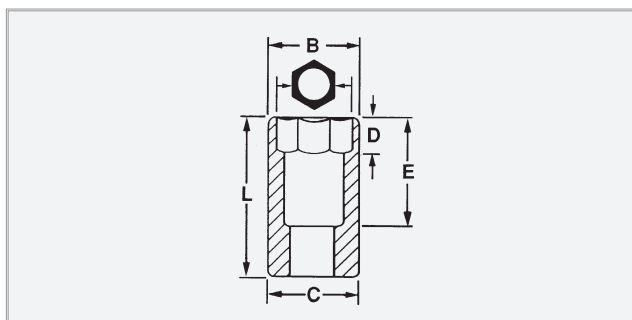



1-1/2" DRIVE STANDARD LENGTH SOCKETS—6 POINT

Product ID No.	in.	B	C	D	E	L	Weight lbs.
15022	1-3/8"	2-19/32"	3-1/4"	7/8"	1-1/2"	3-1/8"	4.40
15023	1-7/16"	2-19/32"	3-1/4"	7/8"	1-1/2"	3-1/8"	4.46
15024	1-1/2"	2-19/32"	3-1/4"	15/16"	1-1/2"	3-1/8"	4.35
15025†*	1-9/16"	2-3/4"	3-1/4"	31/32"	1 1/2"	3-1/8"	4.26
15026	1-5/8"	2-7/8"	3-1/4"	31/32"	1 1/2"	3-1/8"	6.00
15027*	1-11/16"	2-7/8"	3-1/4"	1 1/16"	1-19/32"	3-15/64"	4.67
15028†*	1-3/4"	2-15/16"	3-1/4"	1 3/32"	1-21/32"	3-11/32"	4.86
15029*	1-13/16"	3"	3-1/4"	1-1/8"	1-21/32"	3-11/32"	4.92
15030	1-7/8"	3"	3-1/4"	1-3/16"	1-45/64"	3-11/32"	4.83
15031†*	1-15/16"	3"	3-1/4"	1-1/8"	2"	3-5/8"	5.36
15032	2"	3-1/4"	3-1/4"	1-1/4"	2"	3-5/8"	5.44
15033*	2-1/16"	3-1/4"	3-1/4"	1-9/32"	2"	3-5/8"	5.33
15034†	2-1/8"	3-1/2"	3-1/4"	1-11/32"	2"	3-5/8"	6.4
15035	2-3/16"	3-1/2"	3-1/4"	1-3/8"	2"	3-5/8"	5.63
15036	2-1/4"	3-1/2"	3-1/4"	1-1/2"	2-1/16"	3-3/4"	6.13
15037†	2-5/16"	3-1/2"	3-1/4"	1-1/2"	2-3/16"	3-7/8"	5.96
15038	2-3/8"	3-3/4"	3-1/4"	1-9/16"	2-3/16"	3-7/8"	6.49
15039	2-7/16"	3-3/4"	3-1/4"	1-9/16"	3-3/16"	3-7/8"	8.64
15040†	2-1/2"	3-3/4"	3-1/4"	1-5/8"	2-11/16"	4"	6.67
15041	2-9/16"	3-3/4"	3-1/4"	1-5/8"	2-11/16"	4"	8.36
15042*	2-5/8"	4-1/8"	3-1/4"	1-5/8"	2-7/16"	4 1/8"	10.58
15043†	2-11/16"	4-1/8"	3-1/4"	1-3/4"	2-9/16"	4-1/4"	8.00
15044	2-3/4"	4-1/4"	3-1/4"	1-3/4"	2-9/16"	4-1/4"	8.63
15045	2-13/16"	4-1/4"	3-1/4"	1-7/8"	2-11/16"	4-3/8"	9.83
15046†	2-7/8"	4-1/2"	3-1/4"	1-7/8"	2-11/16"	4-1/2"	9.77
15047	2-15/16"	4-1/2"	3-1/4"	2"	2-13/16"	4-1/2"	9.58
15048	3"	4-1/2"	3-1/4"	2"	2-13/16"	4-1/2"	10.80
15049†	3-1/16"	4-3/4"	3-1/4"	2"	2-15/16"	4-5/8"	10.93
15050	3-1/8"	4-3/4"	3-1/4"	2"	2-15/16"	4-5/8"	10.87
15051†	3-3/16"	4-3/4"	3-1/4"	2"	3-1/32"	4-23/32"	12.62
15052†	3-1/4"	5"	3-1/4"	2"	3-1/32"	4-23/32"	12.80
15053†*	3-5/16"	5"	3-1/4"	2"	31/32"	4-23/32"	11.24
15054*	3-3/8"	5"	3-1/4"	2"	3-1/32"	4-23/32"	11.88
15055†*	3-7/16"	5"	3-1/4"	2"	3-17/64"	4-31/32"	11.81
15056	3-1/2"	5-1/8"	3-1/4"	2-1/4"	3-5/16"	4-31/32"	12.61
15057†	3-9/16"	5-1/8"	3-1/4"	2-1/4"	3-5/16"	5"	13.22
15058*	3-5/8"	5-1/8"	3-1/4"	2-1/4"	3-5/16"	5"	13.62
15059*	3-11/16"	5-1/8"	3-1/4"	2-1/4"	3-5/16"	5"	18.87
15060*	3-3/4"	5-1/2"	3-1/4"	2-1/4"	3-5/16"	5"	13.20
15061*	3-13/16"	5-1/2"	3-1/4"	2-1/4"	3-5/16"	5"	14.40
15062*	3-7/8"	5-1/2"	3-1/4"	2-1/4"	3-13/16"	5-1/2"	13.46
15063	3-15/16"	5-3/4"	3-1/4"	2-1/2"	3-13/16"	5-1/2"	22.87
15064	4"	5-3/4"	3-1/4"	2-1/2"	3-13/16"	5-1/2"	16.26
15065*	4-1/16"	5-3/4"	3-1/4"	2-3/4"	4-1/16"	5-1/2"	15.27
15066	4-1/8"	6"	3-1/4"	2-3/4"	4-1/16"	5-3/4"	17.78
15068	4-1/4"	6"	3-1/4"	2-3/4"	4-1/16"	5-3/4"	17.32
15069	4-5/16"	6"	3-1/4"	2-3/4"	4-1/16"	5-3/4"	19.22
15070	4-3/8"	6-1/4"	3-1/4"	2-3/4"	4-1/16"	5-3/4"	19.65
15071	4-7/16"	6-1/4"	3-1/4"	3"	4-5/16"	6"	18.87
15072	4-1/2"	6-1/4"	3-1/4"	3"	4-5/16"	6"	18.87
15074	4-5/8"	6-1/2"	3-1/4"	3"	4-9/16"	6-1/4"	20.86
15076†	4-3/4"	6-1/2"	3-1/4"	3"	4-9/16"	6-1/4"	20.84

*ANSI Spec.: B107.2

†Fed'l Specs.: GGG-W-660A




1-1/2" DRIVE DEEP LENGTH SOCKETS—6 POINT

Product ID No.	in.	B	C	D	E	L	Weight lbs.
15022L	1-3/8"	2-19/32"	3-1/4"	7/8"	4-1/8"	5-3/4"	7.36
15023L	1-7/16"	2-19/32"	3-1/4"	7/8"	4-1/8"	5-3/4"	9.00
15024L	1-1/2"	2-19/32"	3-1/4"	15/16"	4-1/8"	5-3/4"	9.19
15026L	1-5/8"	2-7/8"	3-1/4"	31/32"	4-1/8"	5-3/4"	9.31
15027L	1-11/16"	2-7/8"	3-1/4"	1-1/16"	4-1/8"	5-3/4"	9.32
15032L	2"	3-1/4"	3-1/4"	3-53/64"	4-3/32"	5-3/4"	8.94
15033L	2-1/16"	3-1/4"	3-1/4"	3-53/64"	4-3/32"	5-3/4"	8.68
15035L	2-3/16"	3-1/2"	3-1/4"	3-57/64"	4-3/32"	5-3/4"	8.82
15036L	2-1/4"	3-1/2"	3-1/4"	3-57/64"	4-7/32"	5-7/8"	8.87
15037L	2-5/16"	3-1/2"	3-1/4"	3-57/64"	4-7/32"	5-7/8"	8.85
15038L	2-3/8"	3-3/4"	3-1/4"	3-57/64"	4-7/32"	5-7/8"	9.85
15039L	2-7/16"	3-3/4"	3-1/4"	3-15/16"	4-11/32"	6"	10.63
15040L	2-1/2"	3-3/4"	3-1/4"	3-59/64"	4-11/32"	6"	9.55
15041L	2-9/16"	3-3/4"	3-1/4"	3-57/64"	4-11/32"	6"	9.19
15042L	2-5/8"	4-1/8"	3-1/4"	3-57/64"	4-11/32"	6"	14.50
15043L	2-11/16"	4-1/8"	3-1/4"	3-63/64"	4-15/32"	6-1/8"	11.68
15044L	2-3/4"	4-1/4"	3-1/4"	3-31/32"	4-15/32"	6-1/8"	12.17
15045L	2-13/16"	4-1/4"	3-1/4"	4-1/16"	4-19/32"	6-1/4"	12.30
15046L	2-7/8"	4-1/2"	3-1/4"	4-3/64"	4-19/32"	6-1/4"	14.03
15047L	2-15/16"	4-1/2"	3-1/4"	4-1/64"	4-19/32"	6-1/4"	13.64
15048L	3"	4-1/2"	3-1/4"	4-1/8"	4-23/32"	6-3/8"	13.49
15049L	3-1/16"	4-3/4"	3-1/4"	4-1/8"	4-23/32"	6-3/8"	15.33
15050L	3-1/8"	4-3/4"	3-1/4"	4-5/64"	4-23/32"	6-3/8"	14.35
15051L	3-3/16"	4-3/4"	3-1/4"	4-3/16"	4-27/32"	6-1/2"	15.68
15052L	3-1/4"	5"	3-1/4"	4-5/32"	4-27/32"	6-1/2"	20.64
15053L	3-5/16"	5"	3-1/4"	4-1/8"	4-27/32"	6-1/2"	21.50
15054L	3-3/8"	5"	3-1/4"	4-1/8"	4-27/32"	6-1/2"	16.05
15055L	3-7/16"	5"	3-1/4"	4-7/64"	4-27/32"	6-1/2"	21.81
15056L	3-1/2"	5-1/8"	3-1/4"	4-5/64"	4-27/32"	6-1/2"	17.16
15057L	3-9/16"	5-1/8"	3-1/4"	4-5/16"	5-3/32"	6-3/4"	21.94
15058L	3-5/8"	5-1/8"	3-1/4"	4-19/64"	5-3/32"	6-3/4"	17.50
15059L	3-11/16"	5-1/8"	3-1/4"	4-17/64"	5-3/32"	6-3/4"	24.40
15060L	3-3/4"	5-1/2"	3-1/4"	4-15/64"	5-3/32"	6-3/4"	20.56
15061L	3-13/16"	5-1/2"	3-1/4"	4-15/64"	5-3/32"	6-3/4"	20.48
15062L	3-7/8"	5-1/2"	3-1/4"	4-7/32"	5-3/32"	6-3/4"	16.63
15063L	3-15/16"	5-3/4"	3-1/4"	4-7/16"	5-11/32"	7"	30.50
15064L	4"	5-3/4"	3-1/4"	4-7/16"	5-11/32"	7"	20.98
15065L	4-1/16"	5-3/4"	3-1/4"	4-25/64"	5-11/32"	7"	29.43
15066L	4-1/8"	6"	3-1/4"	4-25/64"	5-11/32"	7"	22.95
15068L	4-1/4"	6"	3-1/4"	4-37/64"	5-19/32"	7-1/4"	22.24
15069L	4-5/16"	6"	3-1/4"	4-9/16"	5-19/32"	7-1/4"	34.82
15070L	4-3/8"	6-1/4"	3-1/4"	4-35/64"	5-19/32"	7-1/4"	39.95
15072L	4-1/2"	6-1/4"	3-1/4"	4-1/2"	5-19/32"	7-1/4"	31.85
15074L	4-5/8"	6-1/2"	3-1/4"	4-23/32"	5-27/32"	7-1/2"	38.65
15076L	4-3/4"	6-1/2"	3-1/4"	4-43/64"	5-27/32"	7-1/2"	33.75

ANSI Spec.: B107.2

REFERENCE MEASUREMENT KEY

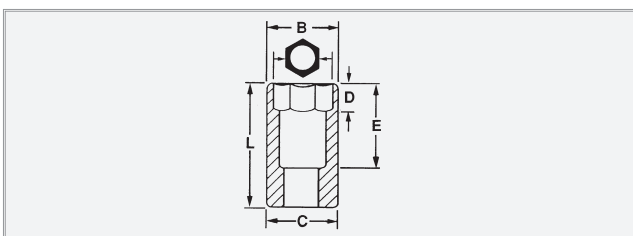



1-1/2" DRIVE UNIVERSAL JOINT

Product ID No.	L	Weight lbs.
15670	7-13/32"	10.21



1-1/2" DRIVE EXTENSIONS

Product ID No.	L	Weight lbs.
15097P	8"	9.21
15098P	12"	12.64
15099P	15"	15.14



1-1/2" DRIVE ADAPTERS

Product ID No.		L	Weight lbs.
15007	1-1/2" F x 1" M	4-3/16"	5.08



1-1/2" DRIVE ADAPTER—MALE SPLINE

Product ID No.		L	Weight lbs.
15005	1-1/2" SQ. F x #5 SPL. M	5-3/8"	5.93




1-1/2" DRIVE RET RING® ONE-PIECE SOCKET RETAINERS

- The Ret Ring® is designed to hold Impact Socket onto an Impact Wrench when it is rotating at high speeds of up to 5000 RPM.
- The steel insert is designed to provide additional security of socket retention to the Impact Wrench.
- Standard Package of 10, not sold individually.

Product ID No.	Description	Diameter Hub	Diameter Groove	Use With
15000-1	Ret Ring	3.25"	3.00"	15022 thru 15076
				15022L thru 15076L
				15005, 15007
				15097P, 15098P, 15099P, 15670
15000-2	Ret Ring	3.75"	3.50"	15038* thru 15051*
				15038L* thru 15051L*
15000-3	Ret Ring	4.25"	4.00"	15052* thru 15065*
				15052L* thru 15065L*
15000-4	Ret Ring	4.75"	4.50"	15066* thru 15076*
				15066L* thru 15076L*

*For old style 1 1/2" Drive Sockets.

REFERENCE MEASUREMENT KEY

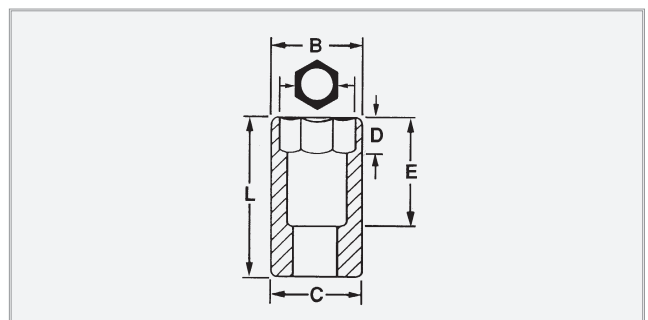



NO. 5 SPLINE DRIVE STANDARD LENGTH SOCKETS—6 POINT

- 14 tooth female spline is machined on precision gear shapers and has an internal groove that fits locking devices on all No. 5 spline drive impact wrenches.
- Standard 1.625" female spline drivers.



Product ID No.	in.	B	C	D	E	L	Weight lbs.
09920	1-1/4"	2-3/8"	2-3/8"	25/32"	1-1/2"	3-1/4"	2.2
09922	1-3/8"	2-3/8"	2-3/8"	55/64"	1-5/8"	3-3/8"	2.2
09923	1-7/16"	2-1/2"	2-3/8"	29/32"	1-5/8"	3-3/8"	2.4
09924	1-1/2"	2-1/2"	2-3/8"	15/16"	1-5/8"	3-3/8"	2.5
09925	1-9/16"	2-3/4"	2-3/8"	63/64"	1-3/4"	3-1/2"	3.0
09926	1-5/8"	2-3/4"	2-3/8"	1-1/64"	1-3/4"	3-5/8"	3.6
09928	1-3/4"	2-15/16"	2-3/8"	1-27/64"	2-1/8"	3-47/64"	4.0
09929	1-13/16"	3-1/8"	2-3/8"	1-27/64"	2-1/8"	3-7/16"	4.0
09930	1-7/8"	3-1/8"	2-3/8"	1-1/2"	2-1/8"	3-17/32"	4.0
09932	2"	3-1/4"	2-3/8"	1-1/2"	2-1/8"	3-17/32"	4.0
09935	2-3/16"	3-1/2"	2-3/8"	1-39/64"	2-1/8"	3-3/4"	4.4
09936	2-1/4"	3-1/2"	2-3/8"	1-23/32"	2-7/16"	4-3/16"	5.0
09941	2-9/16"	3-3/4"	2-3/8"	1-53/64"	2-13/16"	4-3/8"	6.2
09944	2-3/4"	4-1/4"	2-3/8"	1-59/64"	2-13/16"	4-1/4"	7.4
09948	3"	4-1/2"	2-3/8"	2-13/64"	3-1/8"	4-39/64"	8.6
09950	3-1/8"	4-3/4"	2-3/8"	2-13/64"	3-1/8"	4-39/64"	8.6

ANSI Spec.: B107.4



NO. 5 SPLINE DRIVE BUDD WHEEL DEEP LENGTH IMPACT SOCKET—DOUBLE OPENING


Product ID No.	in.	in.	Drive Size	B	C	L	Weight lbs.
09924-LS	1-1/2"	1-3/16"	No. 5 Spline	2-3/8"	2-3/8"	4-3/16"	3.20



NO. 5 SPLINE DRIVE ADAPTER—MALE SQUARE

Product ID No.	F	M	L	Weight lbs.
09902	No. 5 SPL. F x 1" Sq. M		4-3/8"	2.7
09904	No. 5 SPL. F x 1 1/2" Sq. M		5"	3.6

REFERENCE MEASUREMENT KEY

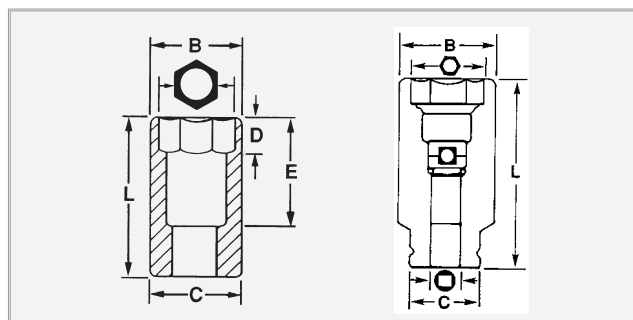

25.4 mm = 1 inch
454 grams = 1 pound

MADE IN
USA



INSERT BIT SET NO. 61929 28 PC. MAGNETIC SCREWDRIVER BIT SET

- Packaged in plastic blow molded box for easy storage.
- Weight: 107 lbs.

Product ID No.	Contents	Description	Length
61929	—	#0 Phillips	1"
	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60020	#3 Phillips	1"
	60200	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60202	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60204	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60206	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60208	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60508	T10 Torx**	1"
	60510	T15 Torx**	1"
	60512	T20 Torx**	1"
	60514	T25 Torx**	1"
	60518	T30 Torx**	1"
	60520	T40 Torx**	1"
	61000	#0 Square	1"
	61002	#1 Square	1"
	61004	#2 Square	1"
	61006	#3 Square	1"
	60802	5/64" Socket Head	1"
	60804	3/32" Socket Head	1"
	60808	1/8" Socket Head	1"
	60812	5/32" Socket Head	1"
	60814	3/16" Socket Head	1"
	61085	1/8" Clutch	1"
	61087	5/32" Clutch	1"
	61239	Magnetic Bit Holder	2-1/4"
	9300MS	Magnetic Screwdriver	7-9/16"

*Torx® is a registered trademark of Textron.



INSERT BIT SET NO. 61906 38 PC. INSERT/POWER BIT SET

- Magnetic base provides tool organization as well as portability.
- Strong magnetic bond allows for superior holding strength.
- Allows bits to remain organized in a tool box drawer as well as on any metal surface.
- Weight: 1.21 lbs.

Product ID No.	Contents	Description	Length
61906	—	#0 Phillips	1"
	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60020	#3 Phillips	1"
	60026	#2 Phillips Reduced Diameter	1"
	60202	4F-5R Slotted	1"
	60204	6F-5R Slotted	1"
	60206	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60208	8F-10R Slotted Insert Bits, 1/4" Hex	1"
	60218	8F-10R Slotted Insert Bits, 1/4" Hex	1-1/2"
	60220	8F-10R Slotted Insert Bits, 1/4" Hex	1-1/2"
	60500	T6 Torx**	1"
	60502	T7 Torx**	1"
	60504	T8 Torx**	1"
	60506	T9 Torx**	1"
	60508	T10 Torx**	1"
	60510	T15 Torx**	1"
	60512	T20 Torx**	1"
	60514	T25 Torx**	1"
	60518	T30 Torx**	1"
	60520	T40 Torx**	1"
	60700	#1 Pozidriv	1"
	60702	#2 Pozidriv	1"
	60804	3/32" Socket Head	1-1/4"
	60806	7/64" Socket Head	1-1/4"
	60808	1/8" Socket Head	1-1/4"
	60810	9/64" Socket Head	1-1/4"
	60812	5/32" Socket Head	1-1/4"
	60814	3/16" Socket Head	1-1/4"
	61000	#0 Square Recess	1"
	61002	#1 Square Recess	1"
	61004	#2 Square Recess	1"
	61006	#3 Square Recess	1"
	61085	1/8" Clutch	1"
	61087	5/32" Clutch	1"
	61089	3/16" Clutch	1"
	61239	Magnetic Bit Holder	2-1/4"
	6925	Bit Holder	1"
	—	Magnetic Base	7"

*Torx® is a registered trademark of Textron.



SET NO. 61904 38 PC. INSERT & POWER BIT SET

- Magnetic base provides tool organization as well as portability.
- Strong magnetic bond allows for superior holding strength.
- Allows bits to remain organized in a tool box drawer as well as on any metal surface.
- Weight: 1.01 lbs.

Product ID No.	Contents	Description	Quantity	Length
61904	60002	#1 Phillips Insert Bit	2 ea.	1"
	60008	#2 Phillips Insert Bit	8 ea.	1"
	60020	#3 Phillips Insert Bit	2 ea.	1"
	60026	#2 Phillips Reduced Dia. Insert Bit	1 ea.	1"
	60202	5/32" Slotted Insert Bit, 1/4" Hex	1 ea.	1"
	60204	7/32" Slotted Insert Bit, 1/4" Hex	2 ea.	1"
	60206	1/4" Slotted Insert Bit, 1/4" Hex	2 ea.	1"
	60208	9/32" Slotted Insert Bit, 1/4" Hex	1 ea.	1"
	60100	#1 Phillips Power Bit	3 ea.	1-15/16"
	60102	#2 Phillips Power Bit	8 ea.	1-15/16"
	60110	#3 Phillips Power Bit	2 ea.	1-15/16"
	60406	4F-5R Slotted Power Bit	1 ea.	1-15/16"
	60412	6F-8F Slotted Power Bit	1 ea.	1-15/16"
	60414	8F-10R Slotted Power Bit	1 ea.	1-15/16"
	60416	10F-12R Slotted Power Bit	1 ea.	1-15/16"
	61239	Magnetic Bit Holder	1 ea.	1-15/16"
	6925	1/4" Dr., 1/4" Hex Bit Holder	1 ea.	1"
	—	Magnetic Base	1 ea.	7"



SET NO. 61901 10 PC. INSERT BIT SET WITH STORAGE BOX

- Popular bits in compact storage box which doubles as a screwdriver handle.
- Bits are power tool rated and can be used with Cordless and Electric Drills.
- Weight: .39 lbs.

Product ID No.	Contents	Description	Length
61901	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60020	#3 Phillips	1"
	60202	4F-5R Slotted	1"
	60206	5/32" Slotted Insert Bit, 1/4" Hex	1"
	60216	7/32" Slotted Insert Bit, 1/4" Hex	1"
	60508	1/4" Slotted Insert Bit, 1/4" Hex	1"
	60510	9/32" Slotted Insert Bit, 1/4" Hex	1"
	60808	1/8" Socket Head	1"
	61223	1/4" x 3" Magnetic Bit Holder	2-31/32"

*Torx® is a registered trademark of Textron.



SET NO. 9322 11 PC. MAGNETIC RATCHETING SCREWDRIVER BIT SET

- Gearless Ratcheting Screwdriver provides smooth operation, infinite ratcheting angle.
- Convenient bit storage in handle.
- Weight: .76 lbs.

Product ID No.	Contents	Description	L
9322	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60202	5/32" Slotted Insert Bit, 1/4" Hex	1"
	60206	1/4" Slotted Insert Bit, 1/4" Hex	1"
	—	3/16" Nut Setter	1-1/2"
	—	1/4" Nut Setter	1-1/2"
	—	9/32" Nut Setter	1-1/2"
	—	5/16" Nut Setter	1-1/2"
	—	11/32" Nut Setter	1-1/2"
	—	7/16" Nut Setter	1-1/2"
	—	Magnetic Ratcheting Screwdriver	8-3/4"




SET NO. 9320 5 PC. MAGNETIC RATCHETING SCREWDRIVER BIT SET

- Gearless Ratcheting Screwdriver provides smooth operation, infinite ratcheting angle.
- Convenient bit storage in handle.
- Weight: .50 lbs.

Product ID No.	Contents	Description	L
9320	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60202	5/32" Slotted Insert Bit, 1/4" Hex	1"
	60206	1/4" Slotted Insert Bit, 1/4" Hex	1"
	—	Magnetic Ratcheting Screwdriver	8-3/4"

REFERENCE MEASUREMENT KEY

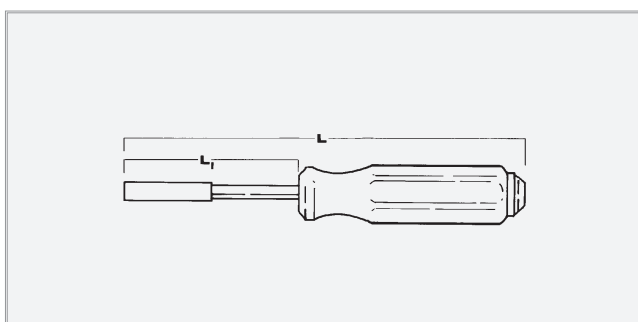

25.4 mm = 1 inch
454 grams = 1 pound


MADE IN
USA



SET NO. 9224
5 PC. MAGNETIC SCREWDRIVER
BIT SET—LONG REACH

- Extra long handle allows greater access to confined, restricted areas.
- Convenient bit storage in handle.
- Gearless Ratcheting Screwdriver provides smooth operation, infinite ratcheting angle.
- Convenient bit storage in handle.
- Weight: .38 lbs.

Product ID No.	Contents	Description	L
9224	60002	#1 Phillips	1"
	60008	#2 Phillips	1"
	60202	5/32" Slotted Insert Bit, 1/4" Hex	1"
	60206	1/4" Slotted Insert Bit, 1/4" Hex	1"
	9300MX	Magnetic Screwdriver—Long Reach	11-15 1/16"

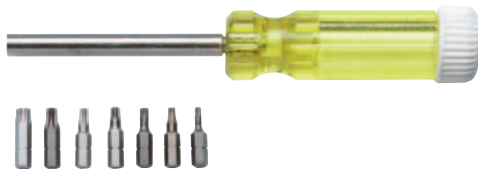

SET NO. 9308
8 PC. MAGNETIC TORX®* SCREWDRIVER BIT SET

- Weight: .39 lbs.

Product ID No.	Contents	
9308	60508	T10
	60510	T15
	60512	T20
	60514	T25
	60516	T27
	60518	T30
	60520	T40
9300MS	Magnetic Driver	

*Torx® is a registered trademark of Textron.



MAGNETIC BIT HOLDER

- 1/4" hex opening.
- Bit storage in handle.
- Rotating flip-top cap will not accidentally open, or get lost.
- One piece stainless steel shank for corrosion resistance.

Product ID No.	L1	L	Weight lbs.
9300MS	4"	8-1/2"	.27

SET NO. 5239P
11 PC. TORX®* BIT SET

- Not for use on impact applications.
- 1/4" and 3/8" drive, 1/4" hex
- Weight: .37 lbs.

Product ID No.	Contents	
5239P	60508	T10
	60510	T15
	60512	T20
	60514	T25
	60516	T27
	60518	T30
	60562	T40
	60564	T45
	60566	T50
	6930	Bit Holder
	6931	Bit Holder
	2466	Pouch

*Torx® is a registered trademark of Textron.




SET NO. 4739P
7 PC. TORX®* BIT SET

- Not for use on impact applications.
- 3/8" drive, 5/16" hex
- Weight: .26 lbs.

Product ID No.	Contents	
4739P	60508	T10
	60510	T15
	60512	T20
	60514	T25
	60516	T27
	60518	T30
	6931	Bit Holder
2466	Pouch	

*Torx® is a registered trademark of Textron.

REFERENCE MEASUREMENT KEY

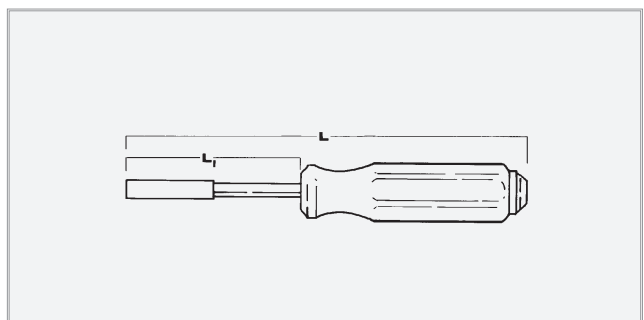



SET NO. 61902 9 PC. NUT SETTER/BIT SET

Set Contains:

Product ID No.	Contents	Size	Length
61902	60650	T20	3-1/2"
	61652	5/16"	1-7/8"
	61654	3/8"	1-7/8"
	60100	Phillips No. 1	1-15/16"
	60102	Phillips No. 2	1-15/16"
	60110	Phillips No. 3	1-15/16"
	60412	Standard Tip .038	1-15/16"
	60416	Standard Tip .046	1-15/16"
	60418	Standard Tip .050	1-15/16"



SET NO. 61909HS 3 PC. NUT SETTER SET—1/4" HEX SHANK

- Torque Plus design resists distorting fasteners while providing longer nut setter life.
- Magnets feature enhanced holding power for improved fastener \ retention, increased productivity.
- Distinctive Gold Finish.



Product ID No.	Contents	Size	Length
61909HS	61620HS	1/4"	2-9/16"
	61622HS	5/16"	2-9/16"
	61624HS	3/8"	2-9/16"



PHILLIPS® INSERT BITS—1/4" HEX

Product ID No.		Length
60002	1	1"
60008	2	1"
60020	3	1"



PHILLIPS® ACR® INSERT BITS—1/4" HEX

- Anti-Camout ribs provide better grip and reduce camout.

Product ID No.		Length
60004	1	1"
60010	2	1"
60022	3	1"



SQUARE RECESS INSERT BITS—1/4" HEX.

Product ID No.		Length
61002	1	1"
61004	2	1"
61006	3	1"



SLOTTED INSERT BITS—1/4" HEX.

Product ID No.	Screw Size	Blade Thickness	Blade Width	Length
60202	4F-5R	.034	3/16"	1"
60204	6F-8R	.040	7/32"	1"
60208	10F-12R	.046	9/32"	1"



TORX®* INSERT BITS—1/4" HEX

Product ID No.		Length
60500	T6	1"
60502	T7	1"
60504	T8	1"
60506	T9	1"
60508	T10	1"
60510	T15	1"
60512	T20	1"
60514	T25	1"
60516	T27	1"
60518	T30	1"
60520	T40	1"

*Torx® is a registered trademark of Textron.



TORX®* TAMPER-PROOF INSERT BITS—1/4" HEX.

Product ID No.		Length
60530	T10H	1"
60532	T15H	1"
60534	T20H	1"
60536	T25H	1"
60538	T27H	1"
60540	T30H	1"
60542	T40H	1"

*Torx® is a registered trademark of Textron.



BIT HOLDERS—1/4" & 5/16" HEX

• Not for use on impact applications.

Product ID No.	 in.	 in.	Length	Weight lbs.
6925	1/4"	1/4"	1"	.04
6931	3/8"	1/4"	1-1/4"	.06
6930	3/8"	5/16"	1-5/16"	.07
6935	1/2"	5/16"	1-1/2"	.11



BIT HOLDER—1/4" HEX

Product ID No.	Hex Size Opening	Body Diameter	Nose Diameter	Length
61204	1/4"	7/16"	7/16"	4"



BIT HOLDERS MAGNETIC—1/4" HEX

Product ID No.	Hex Size Opening	Body Diameter	Nose Diameter	Length
61224	1/4"	7/16"	7/16"	4"
61226	1/4"	7/16"	7/16"	6"
61228	1/4"	7/16"	7/16"	8"
61230	1/4"	7/16"	7/16"	10"
61232	1/4"	7/16"	7/16"	12"



BIT HOLDER—1/4" HEX

Product ID No.	Hex Size Opening	Body Diameter	Nose Diameter	Length
61200	1/4"	7/16"	7/16"	2-1/4"



BIT HOLDERS MAGNETIC—1/4" HEX

Product ID No.	Hex Size Opening	Body Diameter	Nose Diameter	Length
61222	1/4"	7/16"	7/16"	2-1/4"
61223	1/4"	7/16"	7/16"	2-31/32"



NUT SETTERS MAGNETIC—1/4" HEX SHANK

Product ID No.	in.	Socket Body Diameter	Shank Body Diameter	Length
61620	1/4"	7/16"	5/16"	2-9/16"
61628	1/4"	7/16"	3/8"	2-9/16"
61622	5/16"	1/2"	5/16"	2-9/16"
61630	5/16"	1/2"	3/8"	2-9/16"
61624	3/8"	9/16"	5/16"	2-9/16"
61632	3/8"	9/16"	3/8"	2-9/16"
61626	5/8"	5/8"	3/8"	2-9/16"



BIT HOLDER MAGNETIC—1/4" HEX

• Knurled tip to lock bit in place.

Product ID No.	Hex Size Opening	Body Diameter	Nose Diameter	Length
61234	1/4"	7/16"	7/16"	2-15/16"



EXTENSIONS—1/4" HEX SHANK

Product ID No.	Male Square	Socket Retension	Length
61302	1/4"	Pin	2"
61303	1/4"	Pin	3"
61304	1/4"	Pin	4"
61306	1/4"	Pin	6"
61352	1/4"	Ball	2"
61402	3/8"	Pin	2"
61404	3/8"	Pin	4"
61406	3/8"	Pin	6"
61502	3/8"	Ball	2"



NUT SETTERS MAGNETIC—1/4" HEX SHANK

Product ID No.	in.	Socket Body Diameter	Length
61650	1/4"	7/16"	1-7/8"
61650	1/4"	7/16"	1-7/8"
61652	5/16"	1/2"	1-7/8"
61654	3/8"	9/16"	1-7/8"
61656	7/16"	5/8"	1-7/8"
61690	6 mm	7/16"	47.6 mm
61692	8 mm	1/2"	47.6 mm
61694	10 mm	9/16"	47.6 mm

*Tapered



EXTENSIONS—7/16" HEX SHANK

Product ID No.	Male Square	Socket Retension	Length
7111	3/8"	Pin	2-3/4"
7121	1/2"	Pin	2-3/4"