

**WHITE  
LIGHTNING®**

# PRODUCT CATALOG

Premium  
Caulks  
and  
Sealants



White Lightning®, the choice of building industry professionals and DIYers for nearly a century, has updated its packaging. Our new cartridges make it easier to identify and choose the right product for your project. From all purpose caulks and sealants, to those designed specifically for windows & doors or kitchens & baths, White Lightning® has the right sealant for your project.



## Contents

### ALL PURPOSE

4-6

Superior flexibility and elasticity for a variety of interior and exterior uses.

### PROMAX®

7

Thick, heavy-bodied products apply easily and tool with a silky smooth feel and finish.

### KITCHEN | BATH

8

Stands up to high humidity and surface water. Excellent adhesion to natural stone, ceramics and wood.

### WINDOW | DOOR

9

Specially formulated, providing adhesion and flexibility to withstand both harsh weather and fluctuating temperatures.

### SPECIALTY

10-13

For concrete or mortar repair, roof repair and gutter lap installation, smoke & fire blocking and weatherproofing.

### PATCH & REPAIR

14-15

Formulated for smooth and easy application, long-lasting durability, and top performance.

## We Have A Caulk for That

- **Silky Smooth Texture**  
Finishes easily for a smooth, professional finish.
- **Smooth Application**  
Special filling process removes air in cartridge, eliminating gaps, skips and bubbles.
- **Non-Slump Formula**  
Extra-firm consistency and outstanding adhesion; won't run or sag before tooling.
- **Paintable**  
Most caulks & sealants can be finished with quality paints (check individual products for painting instructions).
- **Non-Yellowing**  
Formulas contain UV stabilizers to prevent fading and yellowing.
- **Time Saving**  
Premium product performance and smooth, even application prevents need for rework.
- **Easy Water Clean-Up**  
Water-soluble latex formulas clean-up easily with water.

# Packaging Architecture

The White Lightning® brand team has gained a clear understanding of what our customers are looking for when they shop for caulks and sealants. These findings have been the inspiration for the updates to the White Lightning® brand and packaging.

Consumers equate price with quality and value of a product, but sometimes that doesn't easily translate when comparing cartridges side by side. Beyond warranty, we chose to use colors and key selling features to differentiate the good, better, and best products.

White Lightning® has also introduced bilingual on the new packaging. The new labels accommodate the expanding consumer base by featuring English on one side and Spanish on the other, while staying true to the easy to read packaging architecture.



WE HAVE A CAULK FOR THAT

\* Not all product images in the catalog will reflect new design.



**White Lightning® All Purpose** caulks and sealants provide flexibility and elasticity for a variety of interior and exterior uses. The availability of silicone and latex formulations provide superior performance on a wide range of surfaces.

ALL PURPOSE



### SILICONE ULTRA All Purpose Sealant

This 100% silicone product is the perfect choice for many interior applications. Its durability, UV resistance and superior expansion and contraction capabilities also make it an excellent choice for exterior jobs. It is commonly applied at windows, doors, trim and in many other general purpose applications.

**For use on:** ceramic tile, wood, glass, fiberglass, vinyl, metal and most plastics

- Water/weathertight seal
- Permanently flexible
- Non-shrinking, non-yellowing formula

Meets or exceeds the Federal Specifications of TT-S-001543A Class A (Com-NBS), TT-S-00230C Class A (COM-NBS). Exceeds performance requirements of ASTM C-920 Type S, Grade NS, Class 25.



PRODUCT	COLOR	SIZE
WL09012	Clear	10.0 fl.oz.
WL09212	White	10.0 fl.oz.



### MEGALASTIC® Super Elastic Sealant

**PREMIUM  
LIFETIME**

This premium sealant provides "stretchability" of over 700% and has outstanding flexibility and adhesion to most surfaces. Ideal for any caulking project, it is commonly applied to doors, windows, trim, crown molding and any joints where extreme movement can be expected.

**For use on:** drywall, wood, glass, masonry, concrete, metal, porcelain, plastic

- Superior "stretchability" of over 700%
- Super adhesion
- No cracking
- Paintable
- Interior/exterior



PRODUCT	COLOR	SIZE
WL0004001	White	10.1 fl.oz.



### SILICONE RUBBER All Purpose Sealant

This highly flexible, non-shrinking 100% silicone sealant features outstanding protection against water and weather damage. Its excellent durability and flexibility make it the perfect sealant for areas exposed to heavy wear and harsh elements. Commonly applied at windows, doors, trim, siding and in many other general purpose applications.

**For use on:** ceramic tile, porcelain, vinyl, wood and glass

- Highly flexible, watertight seal
- Non-shrinking
- Resists moisture and mildew
- RTV formula
- Excellent adhesion\*
- Interior/exterior use

Meets or exceeds Federal Specifications of TT-S-001543A Class A (COM-NBS) for silicone building sealants, TT-S-00230C Class A (COM-NBS) for one-component sealants. Exceeds performance requirements of ASTM C-920, Class 25. NSF and USDA listed.

\* Not for use on porous natural materials such as granite, marble, masonry and some metals. Curing process can cause lack of adhesion and may harm these materials. For best results on these surfaces, use Silicone Ultra All Purpose Sealant.



PRODUCT	COLOR	SIZE
WL09010	Clear	10.0 fl.oz.
WL09023	Clear	3.0 fl.oz.
WL09210	White	10.0 fl.oz.
WL09310	Aluminum	10.0 fl.oz.
WL09410	Black	10.0 fl.oz.
WL09510	Bronze	10.0 fl.oz.
WL09611	High Heat Red	10.0 fl.oz.





WATERPROOF



PAINTABLE



INTERIOR/  
EXTERIOR



INTERIOR



EXTERIOR



WATER  
CLEAN-UP



### 3006 ULTRA® All Purpose Elastomeric Sealant

3006 Ultra® is a premium sealant featuring outstanding flexibility and adhesion to most surfaces. An excellent choice for any caulking project, it is ideal for filling joints where high levels of movement are expected. Commonly applied at windows, doors, trim, siding, tubs, showers, sinks, toilets, splashboards, countertops and other high movement joints.

**For use on: drywall, wood, glass, vinyl, masonry, concrete, stucco, metal, porcelain and many plastics**

- 40% more flexible than standard latex caulks
- Dries non-tacky – limits dirt pickup
- Bright white finish
- Paintable
- Water clean-up

use

Exceeds performance requirements of Federal Specification TT-S-00230C Type II, Class A and meets performance requirements of ASTM C-920, Class 35.

Tested at Riverbank Acoustical Laboratories in accordance with ASTM E90 and C-919, this product was sound tested and proven to be an integral component in maintaining STC/MTC partition ratings. It has also been tested in accordance with ASTM C- Stet and D-217.



PRODUCT	COLOR	SIZE
WL0003006	White <input type="checkbox"/>	10.0 fl.oz.
WL0003106	White <input type="checkbox"/>	5.5 fl.oz.
WL0003067	Clear <input type="checkbox"/>	10.0 fl.oz.
WL0003167	Clear <input type="checkbox"/>	5.5 fl.oz.
WL0003068	Gray <input type="checkbox"/>	10.0 fl.oz.
WL0003069	Black <input type="checkbox"/>	10.0 fl.oz.
WL0003070	Almond <input type="checkbox"/>	10.0 fl.oz.
WL0003071	Cedar <input type="checkbox"/>	10.0 fl.oz.
WL0003171	Cedar <input type="checkbox"/>	5.5 fl.oz.
W11003510	Bronze <input type="checkbox"/>	10.0 fl.oz.
WL0003073	Brown <input type="checkbox"/>	10.0 fl.oz.



### BOLT® QUICK DRY Siliconized Acrylic Latex Caulk

BOLT® Quick Dry is a durable caulk that makes quick work of interior and exterior caulking projects. This Quick Dry formula can be painted within 30 minutes, keeping even the most time sensitive projects on track. Ideal for filling joints and openings around doors, windows, baseboards, trim, siding and vents.

**For use on: wood, drywall, metal, glass and masonry**

- PAINTABLE IN 30 MINUTES
- Good flexibility and elasticity
- Maximum durability
- Will not yellow

Meets performance requirements of Federal Specification TT-S-00230C, Type II, Class B and meets performance requirements of ASTM C-920, Class 12.5.



PRODUCT	COLOR	SIZE
WL20510	White <input type="checkbox"/>	10.0 fl.oz.
WL20512	White <input type="checkbox"/>	5.5 fl.oz.



### 3006™ ALL PURPOSE Adhesive Caulk

Original Formula White Lightning® 3006™ is a siliconized acrylic latex caulk perfect for most general purpose jobs. This super white formula has been a professional favorite for years. It is available in a variety of colors, including white and clear.

**For use on: wood, drywall, metal, glass, vinyl, masonry and most plastics**

- Smooth, professional application
- Excellent flexibility and elasticity
- Cured caulk is mildew & rust resistant
- Excellent color retention

Exceeds performance requirements of ASTM C-834



PRODUCT	COLOR	SIZE
WL30060	White <input type="checkbox"/>	10.0 fl.oz.
WL300612	White <input type="checkbox"/>	5.5 fl.oz.
WL30067	Clear <input type="checkbox"/>	10.0 fl.oz.
WL31067	Clear <input type="checkbox"/>	5.5 fl.oz.
WL01010	Almond <input type="checkbox"/>	10.0 fl.oz.
WL00810	Brown <input type="checkbox"/>	10.0 fl.oz.
WL00610	Gray <input type="checkbox"/>	10.0 fl.oz.

ALL PURPOSE



**White Lightning® All Purpose** caulks and sealants provide flexibility and elasticity for a variety of interior and exterior uses. The availability of silicone and latex formulations provide superior performance on a wide range of surfaces.



**PAINTER'S PREFERRED®  
Acrylic Latex Caulk**

Painter's Preferred® is an economical general purpose product suitable for sealing multiple interior/exterior cracks and joints. Ideal for use on doors, windows and trim.

**For use on: wood and glass**

- Paintable
- Water clean-up
- Interior/exterior use

Meets ASTM Specification C-834, Grade NF



PRODUCT	COLOR	SIZE
WL30010-0	White <input type="checkbox"/>	10.0 fl.oz.



**EL SELLADOR™  
Siliconized Acrylic  
Latex Adhesive Caulk**

**STANDARD  
40 YEAR**

El Sellador™, "The Sealer", is a quality caulk suitable for many general purpose jobs. Including windows, doors, trim and other molding. The cartridge and carton feature completely dual language, English/Spanish packaging.


**For use on: wood, drywall, metal and glass**

- Great adhesion and flexibility
- Water clean-up
- Interior/exterior use

Meets the performance requirements of ASTM C-834



PRODUCT	COLOR	SIZE
WL0004002	White <input type="checkbox"/>	10.0 fl.oz.

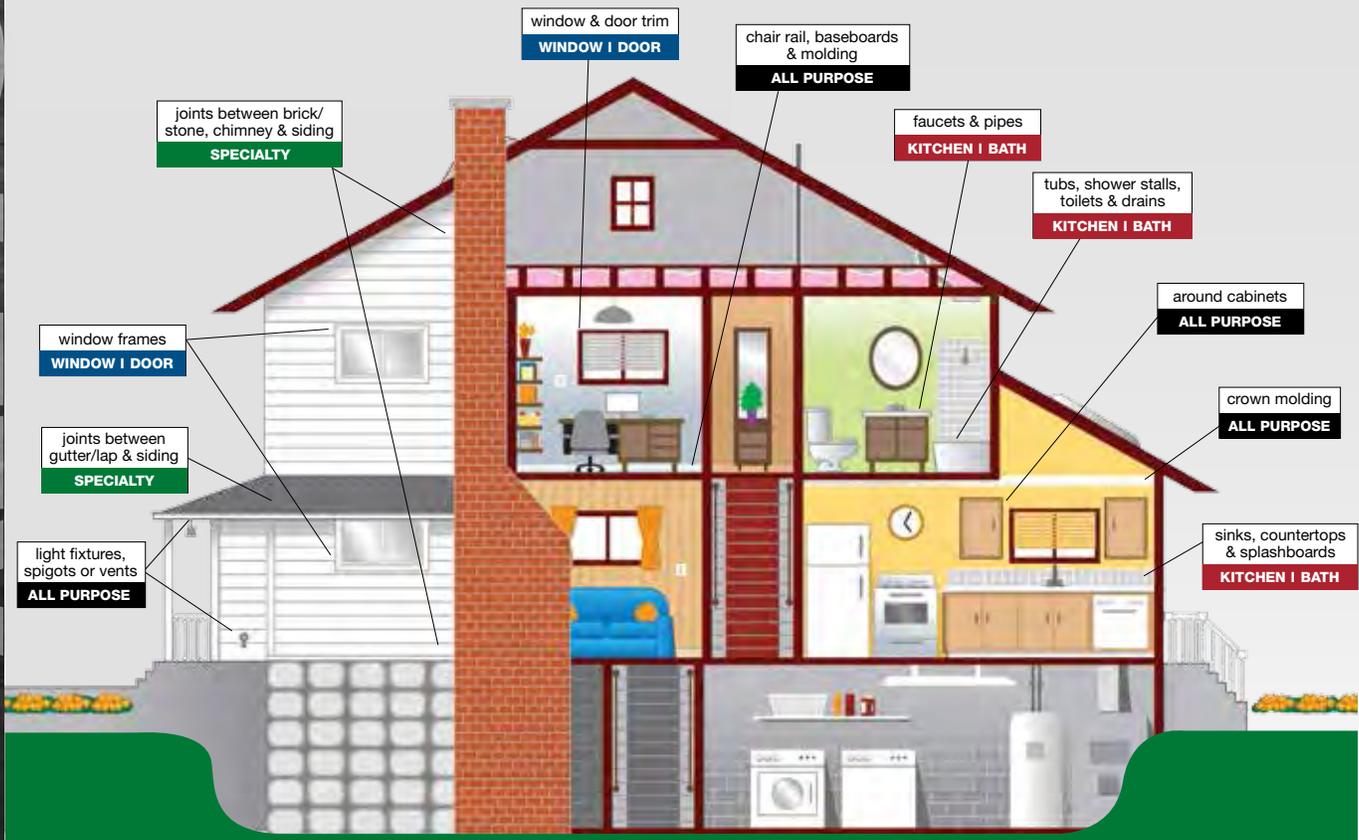



**White Lightning® ProMax®** line of caulks and sealants is a professional grade offering formulated to meet the performance and application demands of even the most selective professionals. These thick, heavy-bodied products apply easily and tool with a silky smooth feel and finish.



**ProMAX 300 RCS-4™** **PREMIUM LIFETIME**  
**Acrylic Urethane Elastomeric Sealant**

This heavy-duty premium elastomeric sealant is professional grade and formulated for outstanding performance on most general purpose caulking jobs. Its extremely thick and smooth consistency is favored among professionals.

**For use on: wood, metal, concrete, brick, plaster, masonry, drywall and tile**

- Excellent durability
- Outstanding adhesion
- Heavy-bodied formulation
- Silky smooth texture
- Interior/exterior use
- Paintable

Meets or exceeds ASTM C-920, Grade NS, Class 25 (Class A)



PRODUCT	COLOR	SIZE
W60300010	White <input type="checkbox"/>	10.0 fl.oz.
W60302010	Almond <input type="checkbox"/>	10.0 fl.oz.
W60303510	Bronze <input type="checkbox"/>	10.0 fl.oz.



**ProMAX 200** **STANDARD 50 YEAR**  
**Siliconized Acrylic Adhesive Caulk**

This 50 year siliconized acrylic latex adhesive caulk is the perfect choice for customers looking for a heavy-bodied, professional grade product. It is an excellent choice for areas of low to moderate joint movement.

**For use on: wood, metal, concrete, brick, plaster, masonry, drywall and tile**

- High performance
- Great durability
- Interior/exterior use
- Paintable

Meets or exceeds ASTM C-834, Grade 0°C, Type OP



PRODUCT	COLOR	SIZE
WL0000200	White <input type="checkbox"/>	10.0 fl.oz.

## HOW MUCH CAN I CAULK?

When using the reference chart below, be sure to consider the physical limitations of the product you are using. Not all products can be used in the gap sizes shown.

### COVERAGE IN LINEAR FEET

ONE CARTRIDGE (10.0 FL. OZ.)					
		DEPTH IN INCHES			
		1/8"	1/4"	3/8"	1/2"
WIDTH IN INCHES	1/8"	99			
	1/4"	49	24		
	3/8"	33	20	11	
	1/2"	24	12	8	6
	5/8"	20	10	7	5
	3/4"	16	8	6	4
	7/8"	14	7	5	4
	1"	12	6	4	3



**ProMAX 100** **ECONOMY 45 YEAR**  
**Siliconized Acrylic Latex Caulk**

This economy grade, professional siliconized acrylic latex caulk is a great choice for sealing areas of low dynamic movement.

**For use on: wood, metal and drywall**

- Cured caulk resists mildew
- Resists paint cracking
- Interior/exterior use
- Paintable

Meets or exceeds ASTM C-834, Grade 0°C, Type OP



PRODUCT	COLOR	SIZE
WL0000100	White <input type="checkbox"/>	10.0 fl.oz.





**White Lightning® Kitchen & Bath** high-performance products that stand up to high humidity, surface water, and a variety of natural materials including granite and marble, ceramics and wood.



### SILICONE ULTRA Kitchen & Bath Sealant

This permanently flexible formulation is used to seal cracks or joints in many kitchen and bath applications. 100% silicone is extremely durable and will protect from damage caused by heat and water. It will not shrink or crack. Commonly applied at bathtubs, basins, sinks, showers, toilets, countertops and splashboards and ceramic tile.

**For use on:** ceramic tile, marble, granite, porcelain, vinyl, wood, metal and glass

- Will NOT SHRINK OR CRACK
- Permanently flexible, watertight seal
- Cured sealant is mildew and rust resistant
- Interior/exterior use

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
WL09216	White <input type="checkbox"/>	10.0 fl.oz.
WL921653Z	White <input type="checkbox"/>	5.3 fl.oz.
WL09016	Clear <input type="checkbox"/>	10.0 fl.oz.
WL901653Z	Clear <input type="checkbox"/>	5.3 fl.oz.
WL09810	Almond <input type="checkbox"/>	10.0 fl.oz.
WL981053Z	Almond <input type="checkbox"/>	5.3 fl.oz.



### LATEX ULTRA Premium High Gloss Sealant

This high-performance product is formulated to seal and waterproof joints and seams. This unique formula delivers a high gloss finish similar to silicone. Commonly applied at bathtubs, basins, sinks, showers, toilets, countertops and splashboards.

**For use on:** ceramic tile, marble, granite, porcelain, vinyl, wood, metal and glass

#### • HIGH GLOSS FINISH

- Paintable
- Permanently flexible
- Water clean-up
- Cured sealant is mold and mildew resistant
- Interior/exterior use



PRODUCT	COLOR	SIZE
WL0002510	White <input type="checkbox"/>	10.0 fl.oz.
WL0002515	White <input type="checkbox"/>	5.5 fl.oz.
WL0002610	Clear <input type="checkbox"/>	10.0 fl.oz.
WL0002615	Clear <input type="checkbox"/>	5.5 fl.oz.
WL0002710	Bisque <input type="checkbox"/>	10.0 fl.oz.
WL0002715	Bisque <input type="checkbox"/>	5.5 fl.oz.



### TUB & TILE Siliconized Acrylic Latex Caulk

This siliconized acrylic latex adhesive caulk offers watertight protection for sinks, showers and baths. The latex formula provides for easy application and easy water clean-up.

**For use on:** wood, glass, ceramic tile, marble and porcelain

- Cured caulk is mildew and rust resistant
- Dries tack free in minutes
- Durable scrubbing surface



PRODUCT	COLOR	SIZE
WL02510	White <input type="checkbox"/>	10.0 fl.oz.
WL50512	White <input type="checkbox"/>	5.5 fl.oz.

## SILICONE SOLUTIONS:

By formulation, silicones stand up to extreme weather conditions and temperature variations. They are also extremely flexible. Silicone sealants adhere well to non-porous surfaces. WHITE LIGHTNING® Silicone Ultra products remain permanently flexible and will not shrink. Silicone Rubber products exhibit many of the same characteristics, but have a stronger odor and should not be used on naturally porous surfaces such as granite, limestone or masonry.



**White Lightning® Window & Door** is specially formulated to provide adhesion and flexibility to withstand both harsh weather and fluctuating temperatures.



### SILICONE ULTRA Window & Door Sealant

Silicone Ultra Window & Door is an excellent choice for many interior and exterior projects. It provides excellent adhesion and flexibility as well as resistance against harsh weather elements. Commonly applied at windows, doors, vinyl siding, trim, etc.

**For use on:** wood, glass, fiberglass, metal, vinyl, masonry, stucco, plaster and many plastics

- WILL NOT SHRINK OR CRACK
- Permanently flexible
- Water/weathertight seal
- Cured caulk is mildew and rust resistant
- Interior/exterior use
- Excellent adhesion

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
WL0007030	White <input type="checkbox"/>	9.0 fl.oz.
WL0007020	Clear <input type="checkbox"/>	9.0 fl.oz.
WL0009910	Aluminum <input type="checkbox"/>	9.0 fl.oz.
WL0009810	Bronze <input type="checkbox"/>	9.0 fl.oz.



### SILICONE RUBBER Window & Door Sealant

This highly flexible, minimally shrinking sealant provides a watertight seal around windows, doors and trim. The 100% silicone formulation offers outstanding protection against weather damage. It is especially effective in areas subject to heavy wear. Commonly applied at windows, doors, trim and siding.

**For use on:** wood, glass, fiberglass, some metals, vinyl, plaster and some plastics

- Highly flexible, watertight seal
- Minimal shrinking
- Cured caulk is mildew and rust resistant
- Protects against heat and water damage
- Excellent adhesion\*
- Interior/exterior use

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25 and is NSF and USDA listed.



PRODUCT	COLOR	SIZE
WL09217	White <input type="checkbox"/>	9.0 fl.oz.
WL09017	Clear <input type="checkbox"/>	9.0 fl.oz.
WL09715	Gray <input type="checkbox"/>	9.0 fl.oz.

\* Not for use on porous natural materials such as granite, marble, and masonry. Curing process can cause lack of adhesion and may harm these materials. For best results on these surfaces, use Silicone Ultra Window & Door Sealant.



### LATEX ULTRA Window & Door Sealant

Latex Ultra is a high performance sealant with EMR™ technology that resists rain and water washout after 2 hours of application. It is also paintable in 30 minutes. Commonly applied at windows, doors and trim.

**For use on:** vinyl, aluminum, fiber cement, wood, hardboard, pressboard, concrete and brick

- Water ready after 2 hours
- Excellent flexibility
- Weathertight seal
- Easy to apply for smooth finish
- Cured sealant is mold and mildew resistant

Meets performance requirements of ASTM C-920, class 12.5



PRODUCT	COLOR	SIZE
WL0014000	White <input type="checkbox"/>	10.0 fl.oz.



### WEATHER SEAL Siliconized Acrylic Latex Caulk

This siliconized acrylic latex adhesive caulk offers a weathertight/watertight seal for interior and exterior applications. The latex formula provides for easy application and easy water clean-up.

**For use on:** wood, vinyl, aluminum, plastic and metal

- Siliconized for extra adhesion
- Cured caulk is mildew and rust resistant
- Good flexibility and elasticity – no cracking

Meets performance requirements of ASTM C-834



PRODUCT	COLOR	SIZE
WL30600	White <input type="checkbox"/>	10.0 fl.oz.

### WINDOW & DOOR Siliconized Acrylic Latex Glazing Compound

PRODUCT	COLOR	SIZE
WL08012	White <input type="checkbox"/>	10.0 fl.oz.

See PDS for details.





**White Lightning® Specialty** caulks and sealants provide superior performance for applications such as concrete or mortar repair, roof repair and gutter lap installation, smoke & fire blocking and weatherproofing.



### STORM BLASTER® All Season Sealant

This super-elastomeric sealant is ideal for exterior use in extreme weather. It can be applied to cold or wet surfaces and still retain its excellent adhesion.

**For use on:** glass, wood, metal, paint, concrete, asphalt, brick, tile, fiberglass and most plastics

- Can be applied to wet and oily surfaces
- Excellent adhesion and permanently flexible
- Can be applied in temperatures ranging from 0°F to 140°F
- Exterior use



PRODUCT	COLOR	SIZE
W41401010	Clear	10.0 fl.oz.
W41000010	White	10.0 fl.oz.

**WEATHER**



### SEASON SEAL™ Removable Weather Stripping

SEASON Seal™ is a temporary sealant that provides a clear, weathertight seal around interior and exterior areas where drafts are a problem.

**For use on:** windows, doors or other exterior openings

- **REMOVABLE AFTER USE**
- **INSULATES AGAINST DRAFTS AND LEAKS**
- Won't harm painted surfaces



PRODUCT	COLOR	SIZE
WL0959500	Clear	10.0 fl.oz.

**WEATHER**



### LATEX CONSTRUCTION ADHESIVE

White Lightning® Latex Construction Adhesive provides instant grab on most porous and non-porous surfaces. It provides excellent adhesion and is ideal for interior application.

**For use on:** wood, concrete, brick, plasterboard, carpet, a variety of plastics, and metal

- Instant grab on most porous and non-porous surfaces
- Provides durable high strength bond



PRODUCT	COLOR	SIZE
W70100010	White	9.0 fl.oz.

**ADHESIVE**



### STOP GAP!® Minimal & Triple Expanding Insulating Foam

These products expand to take the shape of gaps and crevices forming an airtight and waterproof bond to most surfaces. STOP GAP!® dries tack free in 15 minutes and cures in 8 hours. It can be trimmed, sanded and painted. Exposure to sunlight will cause discoloration. Exterior usage requires painting.

**For use on:** wood, metal, masonry, glass and most plastics

- Fills and insulates gaps and cracks
- Can be used as backer rod
- Water resistant
- Fire retardant

PRODUCT	COLOR	SIZE
TRIPLE EXPANDING * WL3333300	Tan	12.0 fl.oz.
MINIMAL EXPANDING WL1111100	Tan	12.0 fl.oz.
TRIPLE EXPANDING * WL3333320	Tan	20.0 fl.oz.

\*Triple expanding foam should not be used to seal openings around windows and doors.



**White Lightning® Specialty** caulks and sealants provide superior performance for applications such as concrete or mortar repair, roof repair and gutter lap installation, smoke & fire blocking and weatherproofing.



### POLYURETHANE ONE-COMPONENT SEALANTS - Smooth

This polyurethane one-component sealant is moisture cure, non-sag and gun grade. It is designed for a wide range of sealing applications in joints subject to structural movement. After curing, this sealant exhibits a flexible, resilient, rubber-like appearance that adheres to a wide variety of substrates and provides up to 70% total joint movement. It is especially effective between joints of dissimilar substrates. Commonly applied at window frames, doors, skylights, foundations, concrete driveways, expansion wall joints, fascia and siding.

**For use on: concrete, cement, cementitious board, masonry, brick, stucco, wood, vinyl and aluminum**

- Superior adhesion to many substrates
- Resists deterioration due to extreme weather, stress, movement, water and many chemicals
- Paintable after full cure
- Easy application
- CARB compliant formulation

Meets or exceeds the test requirements of ASTM C-920, Class 25, Type S, Grade NS, Class 35, Use-NT, A, M, G, O. Federal Specification TT-S-00230C, Type II, Class A, Non-sag, One Component, CGSB 19, GP-13.



PRODUCT	COLOR	SIZE
WL091150A	White	10.1 fl.oz.
WL091160A	Limestone	10.1 fl.oz.



### PAINTABLE SILICONE All Purpose Hybrid Sealant

Paintable Silicone is a high performance hybrid sealant with EMRT™ technology that resists rain and water washout after 3 hours of application. It is also paintable in 30 minutes. It features excellent adhesion and silicone-like performance with paintability of an acrylic latex sealant.

**For use on: aluminum, glass, marble, wood, steel, trim, vinyl siding, and various types of plastic**

- Water ready after 3 hours
- Excellent adhesion and flexibility
- Weather and UV resistant
- Easy to apply for smooth finish
- Cured sealant is mold and mildew resistant



PRODUCT	COLOR	SIZE
WL0032000	White	9.0 fl.oz.



## CONCRETE



### SILICONE ULTRA CONCRETE & MORTAR Repair Sealant

This 100% silicone sealant exhibits superior expansion and contraction properties making it ideal for use in repairing splits and cracks in concrete. It also guards against additional damage from ice and water. Its excellent adhesion and flexibility are ideal for repairing cracks and joints on patios, stairs, sidewalks, floors and driveways.

**For use on: concrete, stucco, mortar, masonry and brick**

- Prevents damage caused by ice and water
- Interior/exterior use
- Excellent adhesion and flexibility
- Great for indoor use

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, C-920, Class 25.



PRODUCT	COLOR	SIZE
WL70212	Cement Gray	10.0 fl.oz.



## CONCRETE



### MORTAR PATCH Latex Caulk

This water clean-up formula provides a durable seal for repairing holes in concrete, mortar, cinder block, stucco, stone, limestone and brick. Commonly applied at driveways, sidewalks, patios, above ground foundations and in various types of masonry.


**For use on: concrete, stucco, mortar, masonry and brick**

- Remains flexible
- Dries to a paintable finish
- Provides a watertight seal



## CONCRETE

PRODUCT	COLOR	SIZE
WL70112	Cement Gray	10.0 fl.oz.



SPECIALTY



**White Lightning® Specialty** caulks and sealants provide superior performance for applications such as concrete or mortar repair, roof repair and gutter lap installation, smoke & fire blocking and weatherproofing.



### SILICONE ULTRA Gutter & Flashing Sealant

This 100% silicone, high performance sealant features superior adhesion to many surfaces. It provides a weathertight seal that remains flexible and is tough enough to stand up to the elements. Ideal for sealing gutters, flashing, downspouts, lap joints, roof vents and siding.

**For use on:** aluminum/metal, wood, plastic, rubber, vinyl, concrete, mortar and stone

- Superior adhesion to metal, wood, masonry and vinyl
- Weatherproof and watertight seal
- Permanently flexible/non-shrinking

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) and TT-S-00230C Class A (COM-NBS) ASTM C-920, Type S, Grade NS, Class 25, 13-M82.



PRODUCT	COLOR	SIZE
WL000117	Clear	10.0 fl.oz.



### BUTYL RUBBER Caulk

Butyl Rubber Caulk is a high performance product that is ideal for sealing exterior gutters, corrugated roofing, pipes, aluminum and vinyl siding, lap joints, flashing, roof vents and drain spouts. Provides an insulated, watertight seal for areas exposed to the elements.


**For use on:** aluminum/metal, plastics, rubber, concrete, wood, vinyl, mortar and stone

- Remains flexible in temperature extremes
- Minimal shrinking
- Provides an insulating, watertight seal
- Exterior use

Meets performance requirements of Federal Specification TT-S-001657 and ASTM Specification C-1085.



PRODUCT	COLOR	SIZE
WL00114	White	10.0 fl.oz.



## ROOFING & GUTTERS



### ASPHALT ROOF CEMENT Sealant

Asphalt Roof Cement is ideal for sealing leaks and openings and provides a durable, watertight seal when waterproofing, repairing or sealing roofs. Commonly applied at flashing, copings, roof decks, roof vents and repairing loose shingles.

**For use on:** asphalt, vinyl, aluminum, concrete, stone, brick and cement

- Excellent adhesion and weatherproofing
- Long-lasting watertight seal
- Withstands temperature extremes
- Can be applied to wet surfaces

Meets ASTM D-3409, ASTM D-453, Type 1



PRODUCT	COLOR	SIZE
WL00215	Black	10.0 fl.oz.



## ROOFING & GUTTERS

## ROOFING & GUTTERS





**White Lightning® Specialty** caulks and sealants provide superior performance for applications such as concrete or mortar repair, roof repair and gutter lap installation, smoke & fire blocking and weatherproofing.



### FLAME BUSTER® Intumescent Silicone Sealant

This expanding, neutral cure intumescent sealant is designed to prevent the spread of fire, smoke and toxic gases. When exposed to temperatures above 300°F, it expands to fill the voids left by collapsed materials.

**For use on: PVC and other plastic through-penetrations**

- Expands at temperatures over 300°F
- Expands to 6 times original volume (at 662°F)

Meets specifications ASTM E-814, ASTM E-84, UL1479, UBC7-5



PRODUCT	COLOR	SIZE
WL8801010	Red	10.0 fl.oz.

## FIRE & SMOKE BLOCKING



### FLAME BUSTER® Fire & Smoke Blocking Silicone Sealant

This premium silicone sealant is designed to block the spread of smoke and fire. It forms a water-resistant seal that will also resist smoke and toxic gases, ultraviolet radiation and ozone.

**For use on: copper and other metal through-penetrations**

- Will withstand temperatures up to 300°F
- Resists cracking
- Can be applied in temperatures ranging from -20°F to 122°F

Meets ASTM E-814, UL1479 and UBC 7-5



PRODUCT	COLOR	SIZE
WL8802020	Red	10.0 fl.oz.

## FIRE & SMOKE BLOCKING



### FLAME BUSTER® High Heat Fire & Smoke Blocking Latex Caulk

This latex caulk is designed to resist high temperatures and smoke in non-rated construction.

**For use on or around: wires, pipes, ducts and vents in wood or steel framed non-rated construction**

- Resists temperatures up to 1380°F
- Blocks drafts, smoke and fire
- Easy application and clean-up

Meets ASTM E-136



PRODUCT	COLOR	SIZE
WL8803030	Red	10.0 fl.oz.

## FIRE & SMOKE BLOCKING



### FLAME BUSTER® Intumescent Latex Caulk

White Lightning® Flame Buster® Intumescent Latex Caulk is an elastomeric, intumescent sealant that expands when exposed to fire or extreme heat, forming an insulated char. Flame Buster® Intumescent Latex Caulk will prevent the spread of toxic gases, smoke and fire. It is suitable for adhesion to almost any surface and remains flexible, making it ideal for both horizontal and vertical joints, subject to vibration or dynamic movement. Flame Buster® Intumescent Latex Caulk can be used for interior or exterior applications, and can be painted (after inspection).

**For use on or around: wires, pipes, ducts and vents**

- Expands 5 times original volume (at 600°F)
- Interior/exterior use
- Remains flexible
- VOC compliant
- Safe to handle
- Water clean-up

Meets ASTM E-814 (UL 1479) and meets the criteria for fire/smoke/draft stop for CABO - UBC - SBCCI - IRC - IBC



(after inspection)

PRODUCT	COLOR	SIZE
WL8801007	Red	10.0 fl.oz.
WL8801008	Red	20.0 fl.oz.
WL8801009	Red	5 Gallon*

\*Special Order: Lead time and minimum quantity apply. Call for details.

## FIRE & SMOKE BLOCKING

SPECIALTY



**White Lightning® Patch & Repair** products take the stress out of common repair jobs. They are formulated for smooth and easy application, long-lasting durability, and top performance.



### 1-STEP LIGHTWEIGHT Spackling Compound

An interior patching product formulated not to shrink, even on large surface repairs. Ideal for filling holes and cracks in most common construction surfaces.

**For use on:** wallboard, plaster, drywall, wood, concrete and masonry

- Interior use only
- No shrinking or cracking
- Cured spackling compound is rust/mildew resistant
- Non-slump formula for smooth application
- Excellent filling capacity



PRODUCT	COLOR	SIZE
WL60512	White	1/2 pint
WL60520	White	Quart



### PAINTER'S PUTTY

This pliable putty is ideal for sealing and filling cracks, small openings and holes in wood. It seals and repairs surfaces to create a finished, professional look. It is packed in water for extended shelf life.

**For use on:** all interior and exterior wood surfaces

- Fills imperfections quickly
- Resists cracking, sagging and shrinking
- Excellent adhesion
- Easy to knead
- Paintable



PRODUCT	COLOR	SIZE
WL08116	Tan	Quart



### VINYL SPACKLING Compound

This heavy-bodied interior spackling compound provides excellent adhesion and minimal shrinkage for numerous surface patching applications.

**For use on:** wallboard, plaster, drywall & wood

- Excellent adhesion, minimal shrinkage
- Easy application and clean-up
- Sandable and paintable
- Interior use only

Meets performance requirements of Federal Specification SS-P-00450A, Type II



PRODUCT	COLOR	SIZE
WL060115	White	1/2 pint

## TIPS:

After the White Lightning® spackling compound dries, sand smooth if desired. Let the area dry for 30 minutes before painting. Large holes or cracks may require longer drying times. It is always recommended to prime with spackling compound before top coating with paint. Due to the porosity of some substrates, the entire surface to be painted may require primer for the most uniform appearance of the topcoat. Clean-up with water.



**White Lightning® Patch & Repair** products are formulated for smooth and easy application, long-lasting durability, and top performance.



### COLOR CUE® Lightweight Spackling Compound

This lightweight spackling compound goes on pink and dries white to indicate when it's time to sand and paint! It is an extremely light, smooth formula that fills in one coat without shrinking or cracking. Ideal for finishing and repairing imperfections.

**For use on: drywall, fiberboard, concrete and masonry, wallboard and plaster**

- **Tells you when To sand and paint!**
- Cured spackling compound is rust and mildew resistant
- Odorless, non-flammable
- No added water prevents shrinking and cracking
- Hollow glass beads provide excellent filling capacity



PRODUCT	COLOR	SIZE
WL0006051	White <input type="checkbox"/>	1/2 pint
WL0006052	White <input type="checkbox"/>	Quart



### GLAZING Compound

This product is blended from a unique combination of high quality pigments and resins specially formulated for sealing glass in wood, metal and aluminum frames. Glazing Compound may also be used to patch cracks and gouges, fill voids in vertical concrete or for repairing surface splits or knots in lumber.

**For use on: wood, metal and aluminum windows**

- Seals window panes in wood and metal frames
- Watertight seal
- Will not crack or yellow with age
- Paintable
- Interior/exterior use



PRODUCT	COLOR	SIZE
WL08015	White <input type="checkbox"/>	1/2 pint
WL08017	White <input type="checkbox"/>	Quart



PATCH & REPAIR



# For LEED Compliance



Many of the products featured in our catalog are formulated with lower VOC (Volatile Organic Compound) levels, reducing emissions into the ozone and promoting healthier air within buildings.

White Lightning® sealants and caulks are at the forefront for complying with LEED (Leadership in Energy and Environmental Design) standards. Whether the project is for commercial buildings, residential homes, schools or hospitals to name a few, White Lightning® can help contractors comply with LEED.

For example, Indoor Air Quality is one of the categories measured by LEED for commercial buildings and Environmentally Preferable Products is one of the categories for homes. White Lightning® products (shown on pages 16-17) contribute to LEED qualification with a one-point credit for sealants and adhesives that are classified as environmentally preferable and rated as low-emitting materials for use on the interior of a building. This is good news for painting and building contractors who choose White Lightning® to meet the caulk and sealant specifications of the job.



### **silicone ultra all purpose sealant**

This 100% silicone sealant features formulation, durability and UV resistance. Ideal for interior and exterior jobs.

**See page 4 for product details.**



### **3006 ULTRA® all purpose electrometric sealant**

A premium sealant with outstanding flexibility and adhesion for filling joints with high levels of movement.

**See page 5 for product details.**



### **3006™ all purpose adhesive Caulk**

Perfect for most general-purpose jobs and is mildew and rust resistant when cured.

**see page 5 for product details.**



### **BOLT® Quick dry siliconized acrylic latex Caulk**

Can be painted within 30 minutes and is ideal for time sensitive projects.

**See page 5 for product details.**



### **painter's preferred® acrylic latex Caulk**

Is economical and for general-purpose use.

**see page 6 for product details.**

## All Purpose Products



## LEED Rating Systems

Architects, facility managers, building owners, interior designers, developers and specifiers use LEED construction principles to achieve LEED certification for sustainable building and development practices, which result in lower building operating costs, increased value and resale opportunities, possible tax incentives, and access to construction grant money.

To achieve LEED certification, architects, builders and contractors try to get as many LEED points as possible from all aspects of a building, including sustainability, water efficiency, energy use, materials and design. For more information about LEED Rating systems, visit the U.S. Green Building Council web site at [www.usgbc.org](http://www.usgbc.org).

Get to know the White Lightning® line of caulks and sealants and discover how they can help a building project earn LEED points.



### Latex ultra premium high Gloss sealant

A high-performance product formulated to seal and waterproof joints and seams.

See page 8 for product details

**Kitchen | Bath**



### weather seal siliconized acrylic Latex Caulk

Provides a weathertight/watertight seal for interior and exterior applications.

See page 9 for product details.

**Window | Door**



### polyurethane one-Component sealants – smooth

Are moisture cure, non-sag and gun grade; ideal for sealing joints of dissimilar substrates.

See page 11 for product details.

**Special Jobs**



### 1-Step Lightweight spackling Compound

An interior/exterior patching product formulated not to shrink or crack when filling holes or cracks on large surface repairs.

see page 14 for product details.

**Patch & Repair**



# Product Information



**ALL PURPOSE**

**PRO<sup>®</sup>  
MAX**

Mfg.Part #	Product Description	Case Pack UPC	Color
WI 09212	Silicone Ultra All Purpose 100% Silicone Sealant	N/A	White
WI 09012	Silicone Ultra All Purpose 100% Silicone Sealant	N/A	Clear
WI 09210	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	White
WL09010	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	Clear
WL09310	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	Aluminum
WL09410	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	Black
WL09510	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	Bronze
WI 09023	Silicone Rubber All Purpose 100% Silicone Sealant	N/A	Clear
WL09611	High Heat RTV Red Silicone - Industrial	N/A	Red
WL0003006	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00072-8	White
WL0003106	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00168-8	White
WL0003067	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00096-4	Clear
WL0003167	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00169-5	Clear
WL0003068	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00074-2	Gray
WL0003069	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00075-9	Black
WL0003070	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00073-5	Almond
WL0003071	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00097-1	Cedar
WL0003171	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-00170-1	Cedar
WL0003073	3006 Ultra <sup>®</sup> Elastomeric Sealant	N/A	Brown
W11003510	3006 Ultra <sup>®</sup> Elastomeric Sealant	0-23275-01176-2	Bronze
WL0004001	MEGALASTIC <sup>®</sup> Super Elastic Sealant	0-23275-00098-8	White
WI 20510	BOLT <sup>®</sup> Quick Dry Siliconized Acrylic Latex Caulk	0-23275-20511-6	White
WI 20512	BOLT <sup>®</sup> Quick Dry Siliconized Acrylic Latex Caulk	0-23275-20512-3	White
WL30060	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-30061-3	White
WL30067	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-31067-4	Clear
WL00610	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-00611-9	Gray
WL00810	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-00811-3	Brown
WL01010	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-01011-6	Almond
WI 300612	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-30612-7	White
WL31067	Original Formula 3006 <sup>™</sup> All Purpose Adhesive Caulk	0-23275-31068-1	Clear
WL30010-0	PAINTERS PREFERRED <sup>®</sup> Acrylic Latex Caulk	0-23275-31010-0	White
WI 0004002	El Sellador <sup>™</sup> Siliconized Acrylic Latex Caulk	0-23275-00010-0	White
WL0000100	WL ProMAX <sup>®</sup> 100 Acrylic Latex Caulk	0-23275-00103-9	White
WI 0000200	WL ProMAX <sup>®</sup> 200 Siliconized Acrylic Latex Caulk	0-23275-00104-6	White
W60300010	WL ProMAX 300 RCS-4 <sup>™</sup> Acrylic Urethane Elastomeric Sealant	N/A	White
W60302010	WL ProMAX 300 RCS-4 <sup>™</sup> Acrylic Urethane Elastomeric Sealant	N/A	Almond
W60303510	WL ProMAX 300 RCS-4 <sup>™</sup> Acrylic Urethane Elastomeric Sealant	N/A	Bronze

Size	Container Type	Case Pack Size	Product UPC	Case I2 of 5	Case Weight (pounds)	Case Dimensions			Case Cube (feet)
						H"	W"	D"	
10.0 fl. oz.	Plastic Ctg.	12	023275092129	3-00-23275-09212-0	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275090125	3-00-23275-09012-6	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg. w/ Screw-On Nozzle	12	023275092105	3-00-23275-09210-6	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg. w/ Screw-On Nozzle	12	023275090101	3-00-23275-09010-2	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg. w/ Screw-On Nozzle	12	023275093102	3-00-23275-09310-3	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg. w/ Screw-On Nozzle	12	023275094109	3-00-21275-09410-0	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg. w/ Screw-On Nozzle	12	023275095106	3-00-23275-09510-7	9.88	11.75	8.25	6.00	0.34
3 fl. oz.	Plastic Squeeze Tube	12	023275090231	5-00-23275-09023-6	9.00	10.75	11.75	6.75	0.49
10.0 fl. oz.	Plastic Ctg.	12	023275196117	5-00-23275-09611-2	10.50	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275147614	3-00-23275-14761-5	9.01	11.75	8.25	6.00	0.34
5.5 fl. oz.	Plastic Squeeze Tube	12	023275524934	2-00-23275-52494-5	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275147621	3-00-23275-14762-2	9.45	11.75	8.25	6.00	0.34
5.5 fl. oz.	Plastic Squeeze Tube	12	023275524941	3-00-23275-52494-2	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275030688	1-00-23275-03068-5	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275030695	1-00-23275-03069-2	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275030701	1-00-23275-03070-8	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275030718	1-00-23275-03071-5	9.45	11.75	8.25	6.00	0.34
5.5 fl. oz.	Plastic Squeeze Tube	12	023275001640	2-00-23275-00164-4	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275031647	1-00-23275-03164-4	9.45	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275001763	1-00-23275-00176-0	15.00	11.75	8.25	6.00	0.34
10.1 fl. oz.	Plastic Ctg.	12	023275045064	1-00-23275-04506-1	13.64	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275205109	3-00-23275-20510-0	6.62	11.75	8.25	6.00	0.34
5.5 fl. oz.	Squeeze Tube	12	023275205017	3-00-23275-20501-8	13.92	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275300606	3-00-23275-30060-7	13.96	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275300675	3-00-23275-30067-6	9.78	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275006102	3-00-23275-00610-3	14.15	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275008106	3-00-23275-00810-7	14.15	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275010109	3-00-23275-01010-0	14.15	11.75	8.25	6.00	0.34
5.5 fl. oz.	Squeeze Tube	12	023275300668	3-00-23275-30066-9	6.62	10.63	8.25	6.00	0.3
5.5 fl. oz.	Squeeze Tube	12	023275310674	3-00-23275-31067-5	4.83	10.63	8.25	6.00	0.3
10.0 fl. oz.	Plastic Ctg.	12	023275300101	3-00-23275-30010-2	13.92	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275851580	1-00-23275-85158-7	15.00	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275574014	1-00-23275-57401-1	15.00	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275574298	1-00-23275-57429-5	15.00	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275003392	1-00-23275-00339-9	15.00	11.50	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275003378	1-00-23275-00337-5	15.00	11.50	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275003385	1-00-23275-00338-2	15.00	11.50	8.25	6.00	0.34



# Product Information



## KITCHEN BATH

Mfg.Part #	Product Description	Case Pack UPC	Color
WL09216	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-19216-4	White
WL09016	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-19016-0	Clear
WL09810	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-19810-4	Almond
WL921653Z	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-12165-2	White
WL901653Z	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-10165-4	Clear
WL981053Z	Silicone Ultra Kitchen & Bath 100% Silicone Sealant	0-23275-18105-2	Almond
WL0002510	Latex Ultra Premium High Gloss Sealant	0-23275-00110-7	White
WL0002610	Latex Ultra Premium High Gloss Sealant	0-23275-00084-1	Clear
WL0002710	Latex Ultra Premium High Gloss Sealant	0-23275-00085-8	Bisque
WL0002515	Latex Ultra Premium High Gloss Sealant	0-23275-00086-5	White
WL0002615	Latex Ultra Premium High Gloss Sealant	0-23275-00087-2	Clear
WL0002715	Latex Ultra Premium High Gloss Sealant	0-23275-00088-9	Bisque
WL02510	Tub & Tile Siliconized Acrylic Adhesive Caulk	0-23275-12510-0	White
WL50512	Tub & Tile Siliconized Acrylic Adhesive Caulk	0-23275-50512-4	White



## WINDOW DOOR

WL0007030	Silicone Ultra Window & Door 100% Silicone Sealant (Replaces WI 09215)	0-23275-19015-3	White
WL0007020	Silicone Ultra Window & Door 100% Silicone Sealant (Replaces WI 09015)	0-23275-19215-7	Clear
WL0009810	Silicone Ultra Window & Door 100% Silicone Sealant	0-23275-01981-2	Bronze
WL0009910	Silicone Ultra Window & Door 100% Silicone Sealant	0-23275-01991-1	Aluminum
WL09217	Silicone Rubber Window & Door 100% Silicone Sealant	0-23275-19217-1	White
WL09017	Silicone Rubber Window & Door 100% Silicone Sealant	0-23275-19017-7	Clear
WL09715	Silicone Rubber Window & Door 100% Silicone Sealant	N/A	Gray
WL0014000	Latex Ultra Window & Door Sealant	0-23275-00161-9	White
WL30600	Weather Seal Siliconized Acrylic Latex Caulk	0-23275-31600-3	White
WL08012	Siliconized Latex Glazing Compound	0-23275-08013-3	White

Size	Container Type	Case Pack Size	Product UPC	Case 12 of 5	Case Weight (pounds)	Case Dimensions			Case Cube (feet)
						H"	W"	D"	
10.0 fl. oz.	Plastic Ctg.	12	023275092167	3-00-23275-09216-8	12.50	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275090163	3-00-23275-09016-4	5.49	10.63	8.25	6.00	0.3
10.0 fl. oz.	Plastic Ctg.	12	023275098107	3-00-23275-09810-8	12.50	11.75	8.25	6.00	0.34
5.3 fl. oz.	Plastic Squeeze Tube	12	023275921658	3-00-23275-92165-9	5.49	10.63	8.25	6.00	0.3
5.3 fl. oz.	Plastic Squeeze Tube	12	023275901650	3-00-23275-90165-1	4.83	10.63	8.25	6.00	0.3
5.3 fl. oz.	Plastic Squeeze Tube	12	023275981058	3-00-23275-98105-9	4.83	10.63	8.25	6.00	0.3
10.0 fl. oz.	Plastic Ctg.	12	023275128613	3-00-23275-12861-4	13.65	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275128637	3-00-23275-12863-8	9.78	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275128658	3-00-23275-12865-2	13.65	11.75	8.25	6.00	0.34
5.5 fl. oz.	Squeeze Tube	12	023275128620	3-00-23275-12862-1	6.54	10.63	8.25	6.00	0.3
5.5 fl. oz.	Squeeze Tube	12	023275128641	3-00-23275-12864-5	6.54	10.63	8.25	6.00	0.3
5.5 fl. oz.	Squeeze Tube	12	023275128668	3-00-23275-12866-9	6.54	10.63	8.25	6.00	0.3
10.0 fl. oz.	Plastic Ctg.	12	023275025103	3-00-23275-02510-4	13.71	11.75	8.25	6.00	0.34
5.5 fl. oz.	Squeeze Tube	12	023275505018	5-00-23275-50512-9	6.54	10.63	8.25	6.00	0.3
9.0 fl. oz.	Plastic Ctg.	12	023275092150	3-00-23275-09215-1	12.50	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275090156	3-00-23275-09015-7	12.50	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275009813	1-00-23275-00981-0	12.48	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275009912	1-00-23275-00991-9	12.48	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275092174	3-00-23275-09217-5	9.88	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275090170	3-00-23275-09017-1	9.88	11.75	8.25	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275097155	3-00-23275-09715-6	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275001510	1-00-23275-00151-7	13.50	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275306004	3-00-23275-30600-5	14.29	11.75	8.25	6.00	0.34
10.0 fl. oz.	Composite Ctg.	12	023275140721	3-00-23275-08012-7	16.01	11.75	8.25	6.00	0.34

For all products in this chart: Country of Origin = USA, Ship Class = 55.

## TECHNICAL ASSISTANCE

- **Tech Data Sheets** - Can be downloaded from [Paintdocs.com](http://Paintdocs.com)
- **Material Safety Data Sheets (MSDS)** - Provide information required by the Federal Hazard Communication Standard.

### • Customer Service -

Our team of professionals can answer any general or technical question or address issues regarding our products. They can mail our Tech Data or MSDS sheets at no charge. Customer Service 1-800-241-5295.



# Product Information



## SPECIALTY

## PATCH & REPAIR

Mfg.Part #	Product Description	Case Pack UPC	Color
WL091150A	WL Polyurethane Sealant, Smooth	N/A	White
WL091160A	WL Polyurethane Sealant, Smooth	N/A	Limestone
WL091180A	WL Polyurethane Sealant, Smooth	N/A	Black
WL0032000	Paintable Silicone Sealant	0-23275-00076-6	White
W41401010	STORM BI ASTER® All Season Sealant	N/A	Clear
W41000010	STORM BI ASTER® All Season Sealant	N/A	White
WL8801010	FI AME BUSTER® Intumescent Expanding Silicone Sealant	0-23275-18010-9	Red
WL8802020	FI AME BUSTER® Fire & Smoke Blocking Silicone	N/A	Red
WL8803030	FI AME BUSTER® High Heat Fire & Smoke Blocking Latex	0-23275-18030-7	Red
WL8801007	FI AME BUSTER® LATEX Intumescent Expanding Sealant	N/A	Red
WL8801008	FI AME BUSTER® LATEX Intumescent Expanding Sealant	N/A	Red
WL8801009	FI AME BUSTER® LATEX Intumescent Expanding Sealant	N/A	Red
WL0959500	SEASON SEAL™ Removable Weather Stripping Sealant	0-23275-19595-0	Clear
WL0000117	Silicone Ultra Gutter & Flashing Sealant	0-23275-01117-5	Clear
WL00114	Butyl Rubber Caulk	0-23275-01114-4	White
WL00215	Asphalt Roof Cement Premium Sealant	N/A	Black
WL70212	Silicone Ultra Concrete & Mortar Repair	N/A	Cement Gray
WL70112	Mortar Patch Latex Caulk	N/A	Cement Gray
WL1111100	STOP GAP!® Minimal Expanding Foam Sealant	N/A	Tan
WL3333300	STOP GAP!® Triple Expanding Foam Sealant	N/A	Tan
WL3333320	STOP GAP!® Triple Expanding Foam Sealant	N/A	Tan
W70100010	Latex Construction Adhesive	N/A	White
WL08015	Glazing Compound	N/A	White
WL08017	Glazing Compound	N/A	White
WL0006051	ColorCue® Lightweight Spackle	N/A	White
WL0006052	ColorCue® Lightweight Spackle	N/A	White
WL60512	One-Step Spackling Compound	0-23275-60512-1	White
WL60520	One-Step Spackling Compound	0-23275-00148-0	White
WL060115	Vinyl Spackling	N/A	White
WL08116	Painters Putty	N/A	Tan

Size	Container Type	Case Pack Size	Product UPC	Case I2 of 5	Case Weight (pounds)	Case Dimensions			Case Cube (feet)
						H"	W"	D"	
10.1 fl. oz.	Fiber Ctg.	12	023275091153	4-00-23275-29051-6	10.70	12.50	8.00	6.00	0.34
10.1 fl. oz.	Fiber Ctg.	12	023275290525	4-00-23275-29052-3	10.70	12.50	8.00	6.00	0.34
10.1 fl. oz.	Fiber Ctg.	12	023275290532	4-00-23275-29053-0	10.70	12.50	8.00	6.00	0.34
9.0 fl. oz.	Plastic Ctg.	12	023275990173	1-00-23275-00062-6	12.50	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275770102	1-00-23275-77010-9	10.70	12.50	8.00	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275775152	1-00-23275-00321-4	10.70	12.50	8.00	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275880108	3-00-23275-88010-9	11.28	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275880207	3-00-23275-88020-8	11.28	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275880306	3-00-23275-88030-7	11.28	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275850156	1-00-23275-85015-3	16.50	11.75	8.25	6.00	0.34
20.0 fl. oz.	Sausage Pack	12	023275851689	1-00-23275-85168-6	27.20	7.88	8.25	14.00	0.53
5 Gallon	Pail	12	023275851719	1-00-23275-85171-6	70.00	12.00	14.00	12.00	1.2
10.0 fl. oz.	Plastic Ctg.	12	023275095953	3-00-23275-09595-4	8.40	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275001176	1-00-23275-00117-3	10.70	11.75	8.00	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275001145	3-00-23275-00114-6	12.90	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275002159	3-00-23275-00215-0	10.75	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275702127	3-00-23275-70212-8	9.88	11.75	8.25	6.00	0.34
10.0 fl. oz.	Plastic Ctg.	12	023275701120	3-00-23275-70112-1	13.28	11.75	8.25	6.00	0.34
12.0 Net Wt.	Can	8	023275111110	3-00-23275-11111-1	4.00	9.00	11.31	5.75	0.33
12.0 Net Wt.	Can	8	023275333338	3-00-23275-33333-9	4.00	9.00	11.31	5.75	0.33
20.0 Net Wt.	Can	12	023275333208	3-00-23275-33320-9	5.00	9.00	11.31	5.75	0.33
9.0 fl. oz.	Plastic Ctg.	12	023275003187	1-00-23275-00318-4	13.50	11.50	8.25	6.00	0.34
1/2 Pint	Plastic Tub	12	023275080157	5-00-23275-08015-2	12.00	9.94	6.63	6.38	0.24
Quart	Plastic Tub	6	023275080171	5-00-23275-08017-1	24.00	14.88	9.88	4.75	0.4
1/2 Pint	Plastic Tub	12	023275001220	1-00-23275-00122-7	3.97	3.50	6.50	16.50	0.24
Quart	Plastic Tub	6	023275001237	1-00-23275-00123-4	8.40	13.00	10.50	5.50	0.34
1/2 Pint	Plastic Tub	12	023275605152	3-00-23275-60512-2	4.00	4.63	10.56	13.81	0.39
Quart	Plastic Tub	6	023275605206	2-00-23275-60520-0	7.53	5.63	8.88	13.06	0.38
1/2 Pint	Plastic Tub	12	023275601154	3-00-23275-60115-5	12.00	4.63	10.56	13.81	0.39
Quart	Metal Can	6	023275081161	5-00-23275-08116-6	24.00	10.75	6.88	8.06	0.33



**White Lightning® Products**  
Cleveland, Ohio 44115 / 1.800.241.5295 / [wlcaulk.com](http://wlcaulk.com)